

# Popular Science

MONTHLY Founded 1872

October  
1929  
25 cents



## The Zeppelin Grows Up -



See Page 26

Copyrighted material



# Fast-drying "Rogers" colors simplify home decoration for you

*Now easier to apply than ever...  
Guaranteed to dry perfectly, while you wait*

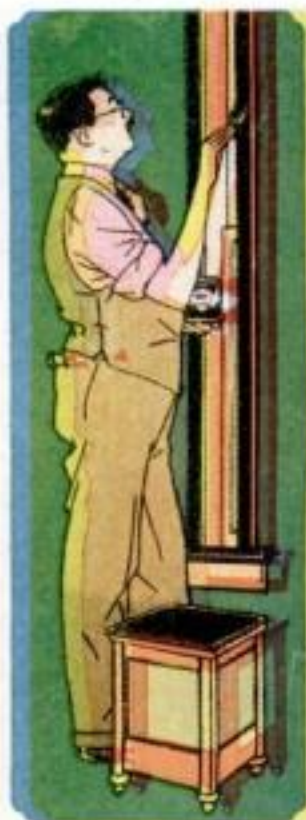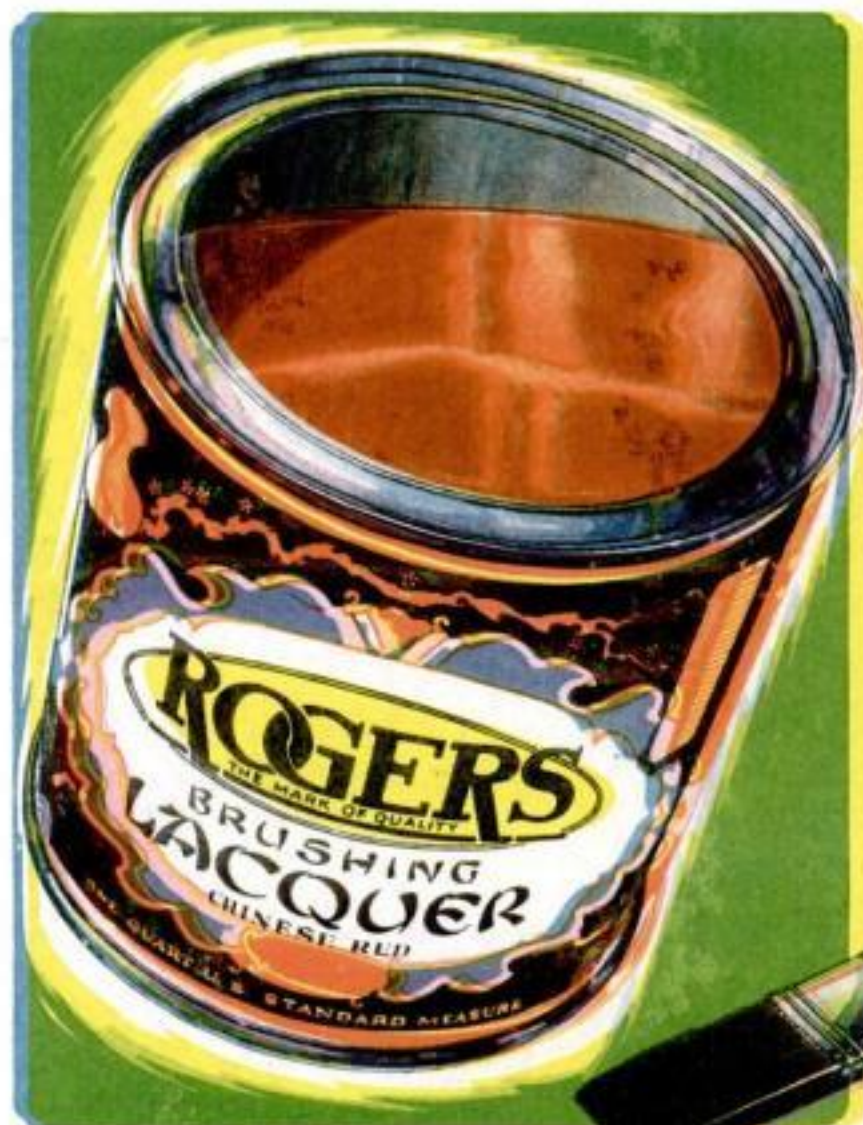

## "MONEY-BACK" GUARANTY

Try one can of Rogers Brushing Lacquer. If not *more* than satisfied, return what is left to your dealer. He is authorized to refund the entire purchase price.

**M**ORE than 20 millions of cans of "Rogers" sold since its comparatively recent introduction!

What a wonderful testimonial to the distinctive features of "Rogers"—to its *exquisite colors*—to its *ease of application*—to its *perfect fast-drying*—to its *great popularity* everywhere for utility and decorative purposes.

### *Anyone can use it successfully*

No special experience is needed to apply these radiant, fast-drying "Rogers" colors. No tedious or expert preparation of the surface is required. Merely *flow* on the rich, glorious "Rogers" color with a full brush. Spread it out like a thin icing.

"Rogers" quickly levels itself. Forms a beautiful, colorful coating over old or new surfaces. Then it actually—**DRIES WHILE YOU WAIT!** Dries *perfectly*, be-

cause that is the nature of lacquer. Dries smooth, no laps, no brush marks. Dries before flying dust can spoil the lustrous sheen. Dries to a tough, porcelain-like finish that wears and wears and WEARS.

### *Colors more beautiful than ever*

"Rogers" colors, always of exquisite hues, are more beautiful *now* than ever. In smart homes everywhere they are the vogue. Do you wonder when you look into the open can shown here? Even in printer's ink the beauty of "Rogers" Chinese Red is alluring.

But *Chinese Red* is only one "Rogers" color. There are 25 others, all equally rich and radiant. There are unlimited tints, easily made by intermixing. There are also six wonderful *deep* colors especially recommended for hard outdoor use as well as indoor, not to forget

the famous "Rogers" black, white and clear, and a new, transparent "Rogers" especially for linoleum.

Printed colors, beautiful as they are, fall far short of the actual "Rogers" colors themselves. Your nearest "Rogers" dealer has complete color cards. Please call on him and *see* them.

### *At dealers' everywhere*

"Rogers" is now preferred and used nationally. Leading paint, hardware and department stores carry it.

However, to be certain of getting "Rogers" colors, easy application, perfect fast-drying and long service, *insist upon the genuine*. It comes only in the familiar "oriental" can shown here and has the name "ROGERS" on the label. You cannot mistake it.

Every can is sold on our nationally advertised "Money-Back" Guaranty.

DETROIT WHITE LEAD WORKS, DETROIT, MICHIGAN  
*Makers of Highest Grade Paints, Varnishes, Colors, Lacquers*

© 1929, D. W. L. W.

Also distributed and guaranteed by: ACME WHITE LEAD AND COLOR WORKS, Detroit, Michigan; LINCOLN PAINT AND COLOR COMPANY, Lincoln, Nebraska; THE LOWE BROTHERS COMPANY, Dayton, Ohio and Toronto, Ont., Canada; THE MARTIN-SENGOUR COMPANY, Chicago, Illinois; PENINSULAR PAINT AND VARNISH COMPANY, Detroit, Michigan; THE SHERWIN-WILLIAMS COMPANY, Cleveland, Ohio; THE SHERWIN-WILLIAMS CO. OF CANADA, LTD., Montreal, Canada; LEWIS BERGER AND SONS, LTD., London, England, and Sydney, Australia; THE SHERWIN-WILLIAMS CO., London, England, and Sydney, Australia.



# LET THESE FACTS GUIDE YOU

## IN THE PURCHASE OF A USED CAR

**W**HETHER or not a used car is a *good* used car and a sound investment for the money is not a difficult matter to determine. Two facts alone will be sufficient to guide you:

The status of the car when new; and the character and standing of the dealer who offers it.

Both of these questions are settled to your complete satisfaction if you select a Cadillac-La Salle dealer as your used car merchant. For Cadillac-La Salle dealers, because of the very nature of the new cars they sell, are in a preferred position to handle used cars. They offer an exceptional variety of types and models, representing nearly all the standard makes.

Because of the *character* of the people who purchase Cadillacs and La Salles, it is obvious that the cars they trade in are the *better* cars of lesser price classifications.

These cars are offered to you by dealers who can be trusted for fair dealing, who follow a rigid policy in the merchandising of used cars, who want your good will and will take every precaution to deserve it.

They are also offered to you at fair prices because they were not overvalued when accepted as trade-ins. They are furthermore in good condition, capable of delivering many miles of service.

They are *good used cars*, well worth the money you invest in them—and the men you buy them from are the *kind* of merchants who are worthy of your patronage.

### CADILLAC-LA SALLE

*Cadillac Motor Car Co., Division of General Motors*



# WHAT IS NEW THIS MONTH

## Table of Contents for October

### LEADING ARTICLES

<b>Barnstorming with Lindbergh</b> . . . . .	<i>By Randy Enslow</i>	19
"Slim's" former flying pal recalls their adventures		
<b>Where the World's Fastest Ocean Liner Gets Its Speed</b> . . . . .		22
Wonders of the <i>Bremen</i> , new Atlantic speed queen		
<b>Aims Rocket at Roof of Sky</b> . . . . .	<i>By Alden P. Armagnac</i>	24
Exploring the upper air with a projectile of science		
<b>The Zeppelin Grows Up</b> . . . . .	<i>By Walter E. Burton</i>	26
The romantic story of the modern airship and its creator		
<b>Plant "Pills" Grow Bumper Crops</b> . . . . .	<i>By H. H. Dunn</i>	29
A discovery that may revolutionize agriculture		
<b>The Bulldog of the Insect World</b> . . . . .	<i>By E. Bade</i>	31
Strange facts about the digger wasp, the farmer's ally		
<b>Fifty Years of Flameless Light</b> . . . . .		32
Why the world celebrates the birthday of electric lamps		
<b>Thomas A. Edison—His Life Story Told in Pictures</b> . . . . .		33
A photographic biography of America's electrical wizard		
<b>Feeding 13,000,000 Radio Sets</b> . . . . .	<i>By Frank Parker Stockbridge</i>	41
The head of a great broadcasting system tells how he delivers whole-sale entertainment		
<b>Everyday Wonders in Colloid Chemistry</b> . . . . .	<i>By E. E. Free</i>	42
The fascinating story of a new-old science		
<b>The Mightiest Airplane That Ever Flew</b> . . . . .		45
Details of the new 100-passenger Dornier flying yacht		
<b>First Scientific Census Will Put America under the Microscope</b> . . . . .	<i>By Alfred P. Reck</i>	50
Tackling the job of counting 120,000,000 noses		
<b>New Gale Machine Tests Planes</b> . . . . .		56
How wind tunnels save lives and money		
<b>New Scientific Refrigeration</b> . . . . .	<i>By Robert E. Martin</i>	57
How fish are kept fresh 1,500 miles from the sea		

### SPECIAL FEATURES

<b>Cover Design</b> . . . . .	<i>By Herbert Paus</i>	
<b>Rise of the Investment Trust</b> . . . . .	<i>By Wallace Ames</i>	4
The financial editor's monthly advice		
<b>Only High-Grade Tubes Survive</b> . . . . .	<i>By F. G. Pryor</i>	12
Why inferior vacuum tubes fail in modern receivers		
<b>Our Readers Say—</b> . . . . .		14
<b>Editorials</b> . . . . .		16
<b>Back of the Month's News</b> . . . . .	<i>By Karl Vooght</i>	46
Interesting comment on the latest in science		
<b>Power Detectors—How They Work</b> . . . . .	<i>By Alfred P. Lane</i>	72
An understandable explanation of an important radio development		
<b>Guarding the Set from Blow-Outs</b> . . . . .	<i>By John Carr</i>	75
Trouble-proofing hints for the radio fan		
<b>A New Slant on House Painting</b> . . . . .	<i>By Roger B. Whitman</i>	76
How to protect outside woodwork against the years		
<b>Glimpses of Unusual Men</b> . . . . .		80
Intimate sketches of people in the public eye		
<b>Linoleum Carving—A New Craft</b> . . . . .	<i>By Douglas Leechman</i>	81
How to cut designs for decorating furniture		
<b>Knocks That Tell of Motor Ills</b> . . . . .	<i>By Martin Bunn</i>	84
Gus and Joe diagnose a sick motor		
<b>Operating Small Shop Machinery</b> . . . . .	<i>By William W. Klenke</i>	90
Building a graceful end table		
<b>How to Hold Angular Shop Work</b> . . . . .	<i>By Henry Simon</i>	94
Tips from an expert machinist		

### Automobiles

<b>Auto Cigar Lighter Held by Suction Grip</b> . . . . .	62
<b>"Tight-Ropes" on Power Line</b> . . . . .	63
<b>Claims Rubber Studs Make Tires Puncture-Proof</b> . . . . .	64
<b>New Antiskid Pavement Made Like Waffles</b> . . . . .	70
<b>Novel Tower Garage Parks Autos Five Deep</b> . . . . .	70
<b>Knocks That Tell of Motor Ills</b> . . . . .	84
<b>Eye-Saver for Auto Repair</b> . . . . .	88
<b>Emergency Flange Repair</b> . . . . .	88
<b>An Inner Tube Saves Shoes</b> . . . . .	88
<b>Spark Plug Hole Cleaner</b> . . . . .	88
<b>Simple Garage Door Check</b> . . . . .	88
<b>Front Tire Wear</b> . . . . .	88
<b>Roll Roofing Transforms an Ugly Garage</b> . . . . .	127

### Aviation

<b>Barnstorming with Lindbergh</b> . . . . .	19
<b>The Zeppelin Grows Up</b> . . . . .	26
<b>The Mightiest Airplane That Ever Flew</b> . . . . .	45
<b>Six Parachute Jumpers Take the Air</b> . . . . .	52
<b>The First Classroom Dirigible</b> . . . . .	52
<b>Largest Aviation Beacon?</b> . . . . .	52
<b>Preparing to Dock a Giant Dirigible</b> . . . . .	52
<b>"Air Motorcycle" and Its Big Brother</b> . . . . .	52
<b>Shattering the World's Duration Mark</b> . . . . .	53
<b>Anchorage for Seadrome</b> . . . . .	53
<b>To Berlin in Six Hours?</b> . . . . .	53
<b>A Camera "Machine Gun"</b> . . . . .	53
<b>Wind Vane for Night Flyers</b> . . . . .	53
<b>Sharpshooting with Bombs</b> . . . . .	53
<b>New Twenty-Passenger Plane</b> . . . . .	53
<b>Parachutes Tested by Monkeys</b> . . . . .	54
<b>Aerial Photos by Night</b> . . . . .	54
<b>Women Aces Recognized</b> . . . . .	54
<b>Two New Glider Records</b> . . . . .	54
<b>Telescoping Corridor for Air Passengers</b> . . . . .	54
<b>Women Flyers Who Have Made Their Mark</b> . . . . .	55
<b>Monoplane Bremen Goes to New York Museum</b> . . . . .	62
<b>Five Brothers Build an Unusual Airplane</b> . . . . .	69

### Engineering

<b>Tallest for Forty Years—the Eiffel Tower</b> . . . . .	49
<b>The World's Highest Dam Rising 336 Feet</b> . . . . .	60
<b>Farm Electricity from High Voltage Lines</b> . . . . .	61
<b>Pipe Lines Carry Coffee down Venezuela Hills</b> . . . . .	67

October, 1929, Vol. 115, No. 4, *Popular Science Monthly* is published monthly at 381 Fourth Avenue, New York, N. Y., by the Popular Science Publishing Co., Inc. Entered as second-class matter Dec. 28, 1918, at the Post Office at New York under the act of March 3, 1879; additional entry as second-class matter at Chicago, Illinois. Entered as second-class matter at the Post Office Department, Canada. Printed in U. S. A. Copyright, 1929, by the Popular Science Publishing Co., Inc. Single copy, 25 cents. Yearly subscriptions to

United States, its possessions, and Canada, \$2.50; foreign countries, \$3. The contents of this magazine must not be reprinted without permission. In presenting numerous stories of new products of applied science, *Popular Science Monthly* does not underwrite the business methods of the individuals or concerns producing them. The use of *Popular Science Monthly* articles for stock-selling schemes is never authorized. O. B. Capen, President and Treasurer; R. C. Wilson, Vice-President; A. L. Cole, Vice-President and Secretary.



**Exceptional People**

Young Astronomers Run High School Observatory	59
Diving Reporter Phones from River Bottom	66
Two Cross the Channel on Water Bicycles	67
An Explorer-Merchant	80
A Patron of Science	148
He Breeds Quail in Captivity	80

**Health and Hygiene**

Preventive Science Cuts Typhoid Death Rate	60
Find Open Windows Are Best Ventilators	62
Eggs, Beans, and Milk Cause Strange Ailment	64
Radium Experts to Fight Cancer in Cities	65
"Dry Ice" Offers a New Remedy for Leprosy	67
Anger and Fear Born of Childhood Diseases?	67
Boys Need More Sunshine Than Girls for Health	69
Paraffin to Heal Lungs	69
More Women Flat Footed; Jobs Are Blamed	70
Physical Comfort a Guide to Good Ventilation	70
Health Cards Proposed	71

**Laboratory Discoveries**

Cathode Rays Test Gems	48
Metals Act Strangely at 458 below Zero	60
Air's Ozone May Be Caused by Sunspots	65
Aluminum Coat Prolongs Life of Duralumin	69
Finds X-Rays Futile for Speeding Up Evolution	71

**Models**

Casting Model Yacht Keels	108
Hints on Model Airplanes	119
Building the Wing for a Lockheed Plane	123
Releasing Bombs from a Model Airplane	129
Simple Way to Make Small Ship Models	131

**Nature**

An Arctic Walrus Hunt	47
Counts 8,239 in Ant Hill	61
Plant and Bird Species Outlived Monsters	63
Tiny One-Cell Creature Wears Life Preserver	69
Grasshoppers Have Valves for Breathing	71

**New Devices for the Home**

Takes Up Slack in Electric Cords	78
A "Grease-Gun" Shoe Shiner	78
Opens Baky Jars	78
Rubber Bumpers on Push Broom Save Furniture	78
Handy Bean Stringer Clamps to Table	78
Novel Tongs Do Odd Jobs	78
Clothespins of Metal	78
Cuts Eggs in Two Kinds of Slices	78
A "Safe" for Milk Bottles	79
Reversible Faucet Serves as Drinking Fountain	79
Electric Room Heater and Stove Combined	79

Laundry Drier Has Removable Unit for Warming Bathroom	79
"Indirect" Electric Fan Averts Colds	79
Portable Ironing Board for Travel	79
Cuts Beans into Short Lengths	79

**New Processes and Inventions**

New Soviet Machine Gun Fires Ten Shots a Second	62
Traffic Light Warning to Safeguard Pedestrians	62
Three-Color Flashlamp Serves as Signal	63
Paper Made Fireproof by New Secret Chemical	64
Blocks Simplify Nailing in Fireproof Walls	64
Self-Centering Nail Set New Aid to Carpenters	65
Spring Rollers Replace Window Sash Cord	68
Automatic Detector Gives Warning of Gas Leaks	68
Substitutes for Store Clerk's Handwriting	69
Mechanical Nurse Holds the Baby's Bottle	69

**Photography**

A Camera "Machine Gun"	53
Aerial Photos by Night	54
Camera Records Unusual Lighting Display	66
Talkie Actors Rehearse on Skeleton Stage	68
Movie Camera Detects False Alarm Jokers	71

**Radio**

Feeding 13,000,000 Radio Sets	41
Radio May Set Watches	64
Power Detectors—How They Work	72
Special Pliers Simplify Wiring	74
Measuring Sensitiveness	74
Testing High Voltages	74
A B C's of Radio	74
Guarding the Set from Blow-outs	75
Dentist's Mirror Locates Broken Radio Connections	146

**Unusual Facts and Ideas**

Fifty Years of Flameless Light	32
Everyday Wonders in Colloid Chemistry	42
Largest American-Built Merchant Vessel	46
Quakes Recorded by Light	46
Guarding Buildings from Decay	46
Farming for Chemicals	47
Sports by Lamplight	47
"Sunshine" in Yeast	48
First Scientific Census Will Put America under the Microscope	59
Outboards Drive Racing Sloop through Canal	60
Largest Sundial Is a Lamp-Post at Night	61
Speeding Train Drops Off Cars at Way Stations	61
Alaska Hunts Destructive Wolves	62
Erased Writing Revealed by Ultra-Violet Rays	63
Woman Sets Office Clocks by 100-Year-Old Watch	63
American Hens Go In for Quantity Production	64
Sculptured Panels Beautify Fire Escapes	65
Hands and Feet Missing in Brazilian Family	65

All Skins Contain Similar Colors, Tests Reveal	66
Engineers Like Blondes; Farmers Like Chickens	66
The Stone-Age Girls Used Lipsticks and Mirrors	66
Crack Train Cuts Time Across the Cascades	67
Luxury in Street Cars	68
Dry Air in Homes Causes Rugs to Wear Out	68
Relief, Not Sorrow, Real Cause of Weeping	68
American Shad Shipped to Japan by Millions	71
This Poultry Farm Has 300,000 Laying Hens	71

**For the Home Owner**

Hints on Constructing Kitchen Cupboards	92
General Utility Tamper Made of Concrete	119
Wood for Outside Woodwork Repairs	121
Protecting Floor Mats from Mold	127
Pulling Electric Plugs	129
New Horn Improves Old Phonograph	137
Hints on Applying Spring Hinges	140
Shimming Hinges	140
Testing Defective Electric Cords	141

**Hints for the Mechanic**

Drill Extension Has Unusual Strength	96
Old Bill Says	96
Making Holes in Spring Stock	100
Two Pipes Aid in Bending Heavy Reinforcing Bars	138
Small Worm Wheel Cut with Ordinary Tap	139
A Non-Corroding Acid Brush	145

**Ideas for the Handy Man**

Mystifying with a Magic Ink Bottle	96
Tools from Old Hack Saws	98
Electrifying Old Kerosene Lamps	102
Decorating with Kalsomine	104
Embroidery Hoop Improves Sandpaper Disk	106
Blueprints for Your Home Workshop	112
Polishing Tarnished Metal	114
Machine for Molding Edges	116
Good Tools Important	119
Comical Ash Trays for Bridge Fans	120
Using Steel Stamps	120
Mounting a Small Shop Motor	121
Extra Drawer Fitted into Sideboard	122
These Book Ends Will Not Slip	128
Loosening Tight Unions	129
Finger Grip Improves Paint-Pot Hook	130
How I Motorized My Home Workshop	132
Simple Tension Regulator	133
How to Turn a Pair of Candlesticks from Steel	134
Sharpening the Wheel of a Glass Cutter	136
Making Sharp-Edged Tools Keen-Cutting	136
How to Make Small Pulleys	143
Making a Countershaft for a Motorized Workshop	144
Old Style Letterpress Clamps Veneered and Glued Pieces	145
Useful Miniature T-Square	146
Oilcloth Tray for Small Articles	146



## Scientific Investment Wins

**H**IT or miss methods have no place in modern industry—only those created by science and tested by experience will do.

Likewise, modern men have discarded haphazard schemes for employing their surplus funds and are now assuring their future financial independence by systematically investing part of their earnings.

You owe it to yourself to become familiar with the Investment Plan of The F. H. Smith Company. Under it monthly payments as low as \$10 may be applied to the purchase of sound bonds, each payment now earning  $6\frac{1}{2}\%$ .

Mail the coupon today for booklets, "How to Build an Independent Income" and "56 Years of Investment Service." The former outlines our Investment Plan and the latter describes the strongly secured Real Estate Mortgage Bonds and other types of securities we offer from time to time.

**THE F. H. SMITH CO.**  
(INCORPORATED)

Investment Securities—Founded 1873  
Smith Bldg., Washington, D. C.

Branch offices in New York and Other Cities

NAME .....

ADDRESS .....

OCCUPATION .....-73-75

# A Six Reel Movie on the Rise of the INVESTMENT TRUST

By WALLACE AMES, Financial Editor

A billion dollars is a lot of money. Within less than a decade, more than a billion dollars belonging to American investors have been put into investment trusts. Today several hundred investment trust companies are operating in the United States. These companies have become a dominant factor in the economic and financial structure of our country. Literally a new investment instrumentality has been placed at the disposal of the private investor . . . bringing within his reach opportunities for profit with protection against loss such as was heretofore known only to banks, insurance companies, and other institutional investors who control large funds and command extreme skill and elaborate facilities.

On the surface the American investment trust seems to have come into existence quite suddenly and to have developed with amazing rapidity. Is it a permanent development or just a passing style? By reviewing the underlying forces we should find the answer. In this way we may discover just what the investment trust means to the man with \$100, \$1,000, or \$10,000 to invest.

### EPISODE I

Until about fifteen years ago American investors owning bonds and stocks numbered but a few hundred of thousands. Today they are numbered in the millions. The World War was largely responsible for this change. First everybody bought Liberty Bonds. Then public utilities began distributing their preferred stocks to customers. And it became the vogue for industrial organizations to make partners of their employees by selling or giving them stock. Real estate bonds gained great popularity. The public's money invested in them helped finance construction of buildings and relieve the housing shortage.

Prices of everything advanced to a new level. Wages went up. Profits increased. Everybody had money—money to invest. We became a nation of investors. We formed the investing habit.

### EPISODE II

The natural result of this widespread public interest in investing was the establishment of thousands of new investment banking firms and investment departments in banks. Small cities and large ones each began to develop its own "Wall Street." Large amounts of capital were invested in these investment banking firms. Corps of security salesmen, research and statistical departments and other facilities were organized in the service of the new American investor.

Our enlarged investment banking machinery soon began to encounter difficulty

in obtaining enough new issues of sound securities to supply the demand of its customers. Investment firms had no sales problem, but a serious production problem. New issues of bonds or shares were usually quickly over-subscribed. There were not enough new securities to go around. Needless to say, an investment house cannot remain long in business and maintain its overhead without securities to sell.

The organization of an investment trust gives the security house the equivalent of a new issue to offer to its customers. But the investment trust itself is not embarrassed through the shortage of new securities above mentioned. It may invest its funds in old securities, those which may have been issued ten, twenty, or fifty years previously, which it purchases in security markets all over the world.

### EPISODE III

Following the war America became the world's largest creditor nation, a position formerly occupied by England. Our people had more money than was required to finance our own development. Other nations were not so bountifully supplied. To keep our surplus money profitably employed it was necessary for us to loan to foreign nations; they were forced to borrow to finance rehabilitation.

The American public is not naturally internationally minded. We may travel extensively abroad, but as investors we do not possess the familiarity with foreign financial conditions necessary to make investments wisely in foreign securities. Investment trusts, whose specialists do understand foreign conditions, can and do invest safely and profitably in other lands. Thus the investment trust became a medium through which surplus funds of individual American investors could be wisely invested abroad.

### EPISODE IV

Right before our eyes American business and industry is undergoing a complete revolution. Just when it started is hard to say. Perhaps it began with the motor industry and paved highways. During the same period the electrical industry has accomplished wonders that make Aladdin look like a piker. Chemical developments are just as amazing. Distances have been diminished and days reduced to split-seconds by airplane, radio and telephone. Mechanical processes are replacing hand labor. Mass production is cutting costs. Chain store units . . . consolidations and mergers of railroads, utilities, banks, manufacturing and mercantile

(Continued on page 5)



## A Six Reel Movie on the Rise of the INVESTMENT TRUST

(Continued from page 4)

enterprises . . . new relations between government and business . . . these are but a few manifestations of a new era—an era which has created record profits for modern corporations.

Having acquired the investing habit, the public naturally looked with eager eye on the profits of modern American industry. But those who were conservative sought a safe way to share in these profits. It was a tradition that bonds were the safe medium of investment; stocks were regarded as speculative. Yet it is the stocks, not the bonds, that participate in profits.

The investment trust became the medium through which stocks could be purchased with the greatest degree of safety. The average investment trust invests its resources in both bonds and stocks. By purchasing a large number of different securities it diversifies its risk and produces a degree of safety unattainable by the average individual of limited funds. Through ownership of investment trust shares the individual participates in all of the investments of the trust.

### EPISODE V

Following the war, something happened to change the attitude of economists toward stocks. Today well selected common stocks enjoy an investment rating. The conservative investor who formerly confined his purchases to bonds today is a buyer of stocks also.

Take the case of Widow Tilson. In 1914 she had \$100,000 invested in 5 percent bonds, from which she derived an income of \$5,000 a year. Living costs went up. Today it takes \$8,000 to maintain a living scale that could be done with \$5,000 fifteen years ago. To get the \$8,000 Widow Tilson either must increase her \$100,000 principal to \$160,000 and invest at 5 percent or raise the income on her original \$100,000 from a 5 percent rate to 8 percent. Bonds do not grow in principal. Neither does their income yield increase. In contrast, the stocks of growing, prosperous business institutions do frequently increase in value and pay higher dividends.

From this statement the reader must not conclude that an investment in any stock will increase in value and in dividend disbursements. We refer to the general tendency of the better grade issues.

The public came to realize that investment income is nothing more or less than buying power. When living costs go up one needs more dollars to meet expenses. How to keep one's investment income in line with changing times has been a real problem since 1914. Through safe investment in stocks the investment trust has helped to solve this problem.

### EPISODE VI

Although the American public cannot be accused of lack of confidence in itself, it has come to realize that investing is a business, a profession, calling for specialized training and special facilities. No longer is invest- (Continued on page 6)

## A WORD TO HUSBANDS who can't afford Life Insurance



### By a Business Man

I HAD an embarrassing experience a few weeks ago—an experience that taught me a lesson.

I needed money—needed it badly, so I went to my banker and said, "Mr. Warner, I want to borrow \$5,000."

"On what security?" he asked.

"My salary," I replied.

The banker asked me a number of questions. "You seem well fixed," he said. "Your business is a stable one and your income is good. But I'm afraid I cannot authorize the loan."

"Why not?" I stammered. "I've always understood that banks make loans to men of known standing in the community on the basis of their salaries. Don't you do that?"

"Certainly," he replied. "But the men usually have life insurance and you have not."

"What difference does that make?"

"All the difference in the world. Suppose you were killed in an automobile accident. How could my bank collect that \$5,000 if you had nothing to leave—not even life insurance?"

I was stumped. I couldn't answer that question—and I must have shown my disappointment because Mr. Warner said with a smile: "Don't take it so hard, young man. It's easily fixed. With a wife and family like yours, you need life insurance anyway. Why don't you get some?"

"I can't afford it," I replied.

"That's interesting," replied the banker. "Evidently you don't realize that modern life insurance is simply a highly specialized way of saving. It doesn't cost money—it's an investment. It's simply a matter of taking money out of one pocket and putting it into a safer pocket where it will grow, pay you dividends and be available at the time you need it most."

"Isn't it true that there are things you feel you must have nowadays which three years ago you would have considered luxuries? Suppose you decided to spend \$5 a week less on these things. Here's what you could get for that \$5 if you invested it in life insurance."

"First, the certainty that if you should be incapacitated and unable to work, you would get an income just the same."

"Second, the knowledge that if you should die, the postman would bring a check to your wife every month for the rest of her life."

"Third, the certainty that if you live, you can quit work some day and enjoy the leisure and travel you have earned."

"Fourth, the ability to borrow money when you need it. And there are many, many other advantages."

Incidents like this are not uncommon. A. Barton Hepburn, Chairman of the Board, Chase National Bank, New York City, says: "When a man comes to us to borrow money, we want to know how much life insurance he carries."

We have prepared an interesting book called "How to Get the Things You Want," which describes the many uses of life insurance. Send for your copy today. There is no obligation.



**PHOENIX MUTUAL  
LIFE INSURANCE COMPANY**

Home Office: Hartford, Conn.

First Policy issued 1851

Copyright 1929, P. M. L. I. Co.

PHOENIX MUTUAL LIFE INSURANCE CO., 454 Elm Street, Hartford, Conn.

Send me by mail, without obligation, your new book, "HOW TO GET THE THINGS YOU WANT."



Name \_\_\_\_\_ Date of Birth \_\_\_\_\_

Business Address \_\_\_\_\_

Home Address \_\_\_\_\_



# Retire in 15 years on your Present living Budget

by investing in safe 6½%  
First Mortgage Bonds

Follow the definite plan given in the new edition of this famous book, and your financial independence is won. The plan works just as surely whether you are now earning \$1,000 or \$100,000 a year.

The way is certain—each step plainly indicated and absolutely safe—dependent of luck, business genius or speculation.

Every fact has been harvested out of the 48 years' experience of Cochran & McCluer in the first mortgage investment banking business.

The plan is so simple any one can understand it—so definite any one can follow it—and so certain no one can fail.

In addition to the Financial Independence Plan and the unique budget schedule, the book gives suggestions that enable you to enjoy more of the good things of life, both while building your independent fortune and after you have attained it.

We invite the most skeptical to read this plain, straightforward, interesting book. Phone, call or send coupon. We employ no salesmen, therefore none will call.

MAIL THIS FOR

**NEW EDITION**

6½%

Cochran & McCluer Co. PSM10  
46 N. Dearborn St., Chicago  
Please send me, without obligation,  
a copy of the new edition of your  
famous book, "How to Retire in  
15 Years."

Mail  
this

Name.....  
Street.....  
City..... State.....

**Cochran & McCluer Co.**

Established 1881—Never a loss to any investor  
46 North Dearborn St., Chicago, Ill.

## The Electrician's Wiring Manual

By F. E. SENGSTOCK, E. E.

Contains all the information needed for the proper installation of lighting and power systems in houses and other buildings.

It completely covers inside electrical wiring and construction in accordance with the National Electric Code.

Pocket size—flexible binding

448 pp. Price, \$2.50

POPULAR SCIENCE MONTHLY

381 Fourth Ave. New York City

## A Six Reel Movie on the Rise of the INVESTMENT TRUST

(Continued from page 5)

ment of money regarded as a sideline in which any intelligent merchant, doctor, engineer, salesman or mechanic can engage without special training. This is the age of specialists . . . and investing is a specialty.

Trained investment counsel can be had . . . for a price. The man with a few thousand to invest cannot afford the services of such counsel. Investment trusts are under the management of investment specialists. The maximum of skill and facilities is at their command. The investor who owns as little as one share in an investment trust benefits by the skill of its management to the same degree as he would if he had 1,000 shares. When one studies this series of episodes and detects their relation to each other, it is easy to understand that the investment trust is the logical, natural result—probably the only development to be expected under the conditions outlined. There were investment trusts in Europe long before they started in this country. But even if they had never existed in Scotland, England and the Continent we would doubtless have them in America today. Considering the underlying facts, it is a safe assumption that the investment trust is here to stay.

An investment trust is simply a business. Its form or structure can be compared to that of any other business, a railroad for example. A railroad sells its stocks and bonds to investors and thus raises working capital. It then buys equipment, acquires its right of way and engages in the business of furnishing transportation. From the profits of its operations it pays expenses, taxes, interest on its bonds and dividends to its stockholders.

Similarly, an investment trust sells its own securities to the public. With the capital thus raised it engages in the business of making investments. With the profits of its investment operations, like the railroad it pays expenses, taxes, interest, and dividends to shareholders.

With huge resources the investment trust is able to invest in many securities, in many countries. It may obtain a degree of diversification far beyond the reach of the average individual. It is able to engage the services of experts and to maintain elaborate statistical and research facilities, perhaps at great cost, but this expense is infinitesimal in relation to each investor's dollar.

Regardless of the amount of his individual holdings, the investment trust gives each shareholder the power of large resources, allows him to share in the safety and profits of internationally diversified investment and gives him the benefits of managerial skill in place of amateurism and guess-work. It permits the investor to share in equity profits with minimum risk, as well as to benefit by diversified bond holdings.

In a development that has proceeded as rapidly as the investment trust has gone forward in this country, it is not likely that the securities of all such companies are good (Continued on page 7)



## INTIMATE GLIMPSES OF FIDELITY BOND HOLDERS



The case of Mrs. L. C. D. is typical of many. With bewildering suddenness she was faced with a problem of securing the largest possible income from the investment of her husband's insurance and at the same time obtaining maximum security for her funds.

On the advice of a friend, a seasoned investor, she purchased Fidelity Bonds. Now, regularly each month, she receives her interest check. Coupons are clipped and reinvestment of funds from matured bonds are cared for automatically. Payment of interest and principal on Fidelity Bonds is guaranteed at maturity.

Fidelity 6% First Mortgage Real Estate Bonds are the choice of investors who seek maximum yield with maximum safety for principal.

**FIDELITY**  
BOND & MORTGAGE CO.

660 Chemical Building, St. Louis  
1188 New York Life Bldg., Chicago  
378 Colorado Nat'l Bank Bldg., Denver

NR280



## "While the Evil Days Come Not"

For many men and women, the "Autumn of Life" is truly the happiest season of all. For then, secure in the fruits of their thrift and foresight, they find leisure to indulge those whims and pursuits for which their competitive years allowed no opportunity.

Let us tell you about our simple Plan whereby small sums, systematically invested, will be returned to you greatly increased by the magic of compound interest in substantial annual payments when you retire from active life. If you will follow the plan, we will guarantee the income.

Write today for our latest financial statement showing resources of more than \$25,000,000.

**INVESTORS SYNDICATE**

Established 1894

HOME OFFICE:  
MINNEAPOLIS, MINN.

Offices in 51 Principal Cities



## "FISCAL-MANAGED" INVESTMENT TRUSTS

### Double your money double-quick

You can double it, of course . . . in 23¼ years at 3%. But that's a third of your life! What is the *shortest time* in which it can be done . . . safely, conservatively, without speculation?

Six years or less is our estimate . . . we have figures to back it up . . . figures showing that money invested in shares of Financial Investing Co. of New York, Ltd., an investment trust managed by United States Fiscal Corporation, has not merely doubled, but half-doubled again in 4½ years. The opportunity is as good now as ever. Read this remarkable record and forecast.


Write today for folder on  
"Money-Doubling."  
Specify Circular J-15

### THE FISCAL SECURITIES CORPORATION

48 Wall Street New York

## Make Machines Self-Managing

Veeder-ROOT

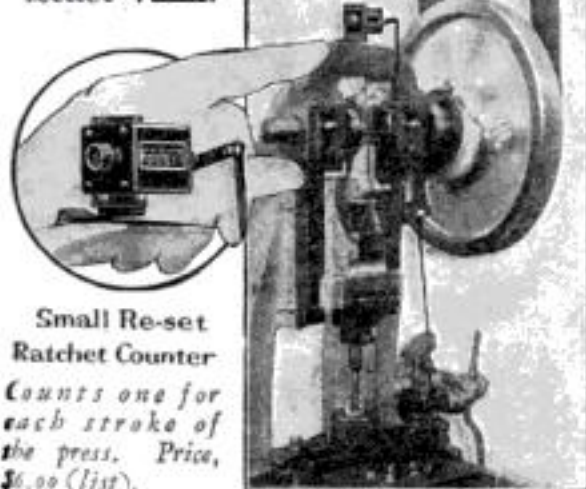

Small Re-set  
Ratchet Counter  
Counts one for  
each stroke of  
the press. Price,  
\$6.00 (list).

The machine that records its production *manages itself*. Gets the attention it needs; gives the output *you* need. If the work slows down, the fact goes down on the Counter. It tells the operator to get busy. *Ask for Catalogue of Counters for all purposes.*

Veeder-ROOT INCORPORATED  
HARTFORD, CONN.

## A Six Reel Movie on the Rise of the INVESTMENT TRUST

(Continued from page 6)

investments. We would advise POPULAR SCIENCE MONTHLY readers to investigate before investing. Study the provisions and restrictions under which the trust management operates. Investigate the reputation of the management. Invest through a firm in which you have confidence.

### To Help You Get Ahead

THE Booklets listed below will help every family in laying out a financial plan. They will be sent on request.

"How to Build an Independent Income" is the title of a new booklet by the F. H. Smith Company which explains conclusively how people of moderate means may obtain financial prosperity. "56 Years of Investment Service" describes the history of progress of the F. H. Smith Company as well as making an attractive suggestion in first mortgage real-estate bonds. May be obtained by addressing the home office of The F. H. Smith Company, Smith Building, Washington, D. C.

The House Behind the Bonds reminds the investor of the importance, not only of studying the investment, but of checking up the banker who offers it. Address: Fidelity Bond & Mortgage Co., 1188 New York Life Building, Chicago, Ill.

"The Investment Trust from the Investor's Viewpoint," presents an explanation of this form of investment in easily understood terms, illustrated with some interesting examples of how the general investment trust will help the man with \$100 or more to get ahead. Published for free distribution by United States Fiscal Corporation, 50 Broadway, New York. Ask them for Booklet IT.

How to Retire in Fifteen Years is the story of a safe, sure and definite method of establishing an estate and building an independent income which will support you the rest of your life on the basis of your present living budget. Write for the booklet to Cochran & McCluer Company, 46 North Dearborn St., Chicago, Ill.

How to Get the Things You Want tells how you can use insurance as an active part of your program for getting ahead financially. Phoenix Mutual Life Insurance Company, 318 Elm Street, Hartford, Conn., will send you this booklet on request.


The Guaranteed Way to Financial Independence tells how a definite monthly savings plan will bring you financial independence. Write for this booklet to Investors Syndicate, 100 North Seventh Street, Minneapolis, Minn.

The Making of a Good Investment tells how 6½% can be made on investment in First Mortgage Bonds in units of \$50, \$100, \$250, \$500 and \$1000; how the bonds are protected and how simple it is to purchase them. For a copy of this booklet address United States Mortgage Bond Company, Limited, Detroit, Michigan.

The Investment Trust from the Investor's Viewpoint is a booklet describing the investment trust in non-technical language, published by Smith, Reed & Jones, Inc., 1405 Chase National Bank Building, New York. This booklet explains how both earning power and safety are applied to moderate sums of money through the instrumentality of the investment trust.

"Money Doubling." This newly published pamphlet describes a feasible plan whereby the investor may double his money in less than six years by accumulating the stock of Financial Investing Co. of New York, Ltd., which he receives as quarterly dividends. It will be sent free on request addressed to Smith, Reed & Jones, Room 1408, Chase National Bank Building, New York.

## Have you a? Wet Cellar?

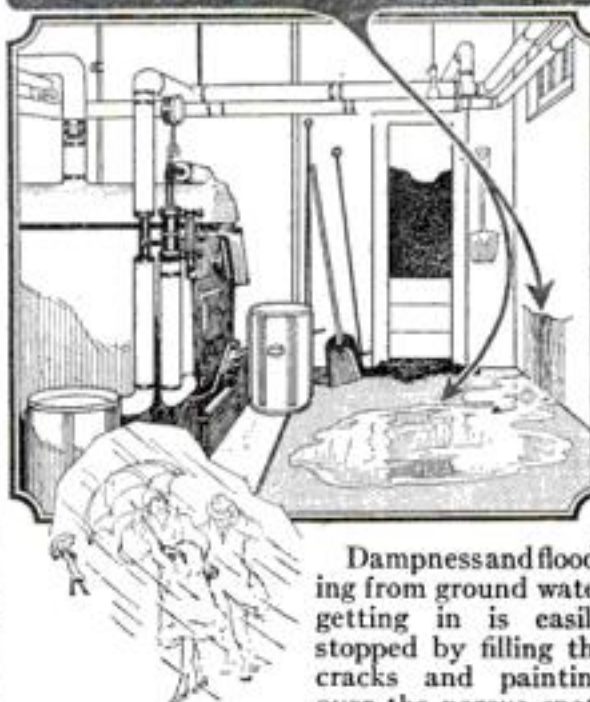

Dampness and flooding from ground water getting in is easily stopped by filling the cracks and painting over the porous spots in concrete or brick walls and floor with

### SMOOTH-ON No. 7

—the only effective waterproofing material that can be applied from inside and to wet or dry surface.

Excellent also for waterproofing boiler pits, cisterns, tanks, ponds, wash-room, garage, and stable floors, etc. About 25 lbs. required for each 100 sq. ft. of surface and you can do the work yourself.

### SMOOTH-ON No. 1

is the good old standby for stopping leaks in steam, water, gas, oil, or stove pipes; mending cracks, breaks or leaks in furnaces and boilers, radiators, tanks, sinks, pots, and pails, making loose handles tight on umbrellas, knives, hammers, brushes, drawers, etc.; tightening loose screws, hooks, locks, door knobs, etc. Use it on the automobile for stopping leaks in radiator, hose connections, gas tank, gas, oil and exhaust lines, keeping lubricators, hub caps and nuts from loosening and falling off, etc.



Write for  
FREE BOOK



Do it with SMOOTH-ON

SMOOTH-ON MFG. CO., Dept. 58.

574 Communipaw Ave., Jersey City, N. J.

Please send the free Smooth-On Repair Book.

Name.....

Address.....

10-29.....

Return this coupon for a  
FREE copy of Booklet



## INDEX

### *Guaranteed Advertisements*

Automobiles and Accessories	Page
Cadillac Motor Car Co.	1
Houde Engineering Corporation	83
National Carbon Co.	105
Packard Electric Co.	166
Studebaker Corporation of America, The.	121
Vacuum Oil Co.	89

## Building Materials

Celotex Company, The .....	18
International Mill and Timber Co. ....	132
Johns-Manville Corporation .....	85
Masonite Corporation .....	13
Upson Co., The .....	123

## Books

American Technical Society .....	140
Collier & Son Company, P. F. ....	145
Encyclopaedia Britannica, Inc. ....	11
Merriam Co., G. & C. ....	155
Perry Service Assn. ....	142
Science News-Letter .....	158
Van Nostrand Co., Inc., D. ....	156
Walker-Turner Co., Inc. ....	124

## Things to Make

American Chime Clock Co.....	133
Fireside Industries.....	115
Ideal Aeroplane & Supply Co., Inc.....	132
Mann & Benton.....	130
Schiercke, Henry C.....	130

## Investments

Cochran & McCluer Co.	6
Fidelity Bond & Mortgage Co.	6
Fiscal Securities Corp., The	7
Investors Syndicate	6
Phoenix Mutual Life Insurance Co.	5
Smith Company, The F. H.	4

### Tools and Shop Equipment

Arkograph Pen Co.	134
Atkins & Company, E. C.	120
Billings & Spencer Co., The	134
Boice, W. B. & J. E.	130
Brown & Sharpe Mfg. Co.	97
Carborundum Co., The	131
Clayton & Lambert Manufacturing Co.	91
Delta Specialty Company	137
Diston & Sons, Inc., Henry	93
Gerstner & Sons, H.	135
Goodell-Pratt Co.	108
Greenfield Tap & Die Corp.	133
Henton & Anderson	137
Maydole Hammer Co., The David	122
Midland Appliance Corp.	134
Nicholson File Co.	118
North Bros. Mfg. Co.	117
Ottawa Mfg. Co.	124
Parks Woodworking Machine Co., The	130
Peck, Stow & Wilcox Co., The	106
Porter-Cable Machine Co., The	122
Porter, Inc., H. K.	102
Prentiss Vise Co.	100
Scott-Bansbach Machinery Co.	136
Simonds Saw & Steel Co.	116
South Bend Lathe Works	130
Stanley Rule & Level Plant, The	99
Starrett Co., The L. S.	95
Trimont Mfg. Co.	104
Waco Tool Works, Inc.	122
Wallace & Co., J. D.	111
Williams & Co., J. H.	98
Witte Engine Works	130

## General

Eastman Kodak Co. . . . .	168
General Electric Co. . . . .	3d Cover
Westinghouse Elec. & Mfg. Co. . . . .	9
Western Electric Co. . . . .	101
Williams Oil-O-Matic Heating Corp. . . . .	110

### Watches and Jewelry

Federal Mail Order Co. ....	148
Studebaker Watch Company.....	128

### Musical Instruments

Buescher Band Instrument Co. ....	156
Conn, Ltd., C. G. ....	132
Deagan, Inc., J. C. ....	128-150
Pan-American Band Inst. & Case Co. ....	146
Selmer. ....	134

### Razors, Toilet Articles, Etc.

Colgate.....	125
Gillette Safety Razor Co.....	17
Lambert Pharmaceutical Company.....	15
Palmolive.....	119
Procter & Gamble.....	122
Williams Co., The J. B.....	129

**Typewriters, Writing Materials, Etc.**

Cleary, C. M.	140
Inkograph Co., Inc.	132

### Educational

American School	147-164
American School of Photography	160
Bliss Electrical School	150
Bogue, Benjamin, N.	155
Chicago School of Watchmaking	142
Chicago Technical College	154
Columbia University	143
Cody School of English, Sherwin	155
Davey Tree Expert Co.	144
Detroit School of Lettering	162
Dobe, Fred W.	151
Federal School of Illustrating	149
Federal Schools, Inc.	154
Finlay Engineering College	155
First Hawaiian Conserv. of Music	160
Franklin Institute	151-153-162
Greer College	152
Hamilton Inst., Alexander	162
High School Home Study Bureau	142
International Correspondence Schools	140-146-152-160
Laundon School, The	162
La Salle Extension University	142-155-160

### Radio Apparatus

Aerovox Wireless Corp.	138
Benjamin Electric Mfg. Co.	132
Cunningham Co., E. T.	136
Day-Fan Electric Co.	107
Electrad, Inc.	137
Hammarlund Mfg. Co.	136
Midwest Radio Corp.	165
National Carbon Co., Inc.	113-167
Radio-Victor Corporation of America	Back Cover
Radiall Company	137
Sears, Roebuck & Co.	109
Triad Mfg. Company	103

## Aviation

American School of Aviation.....	163
Aviation Inst. of U. S. A.....	162
Lincoln Airplane School.....	146
Pacific Technical University.....	144
Universal Aviation Schools.....	142
Von Hoffmann Aircraft School.....	135

### Sporting Goods

Automatic Rubber Co.	134
Harley Davidson Motor Co.	114
Porter Chemical Co.	133
Tarbell System, Inc.	153

### Industrial Equipment

Norton Company.....	10
Taylor Instrument Companies.....	127
Veeder-Root Inc.....	7

### Patent Attorneys

Dieterich, Albert E. ....	156
Evans & Company, Victor J. ....	159
Fisher Mfg. Company, Adam ....	158
Greene, W. T. ....	158
Lacey & Lacey ....	156
Lancaster & Allwine ....	158
McCathran, Irving L. ....	156
Munn & Company ....	161
O'Brien, Clarence A. ....	157
Randolph & Company ....	163

### Hardware Supplies

Detroit White Lead Works.....	Second Cover
Johnson & Son, S. C.....	87
Le Page's Glue.....	112
Plastic Wood.....	128
Smooth-On Mfg. Co.....	7

## Business Opportunities

American Business Builders, Inc.	141
Central States Manufacturing Co.	153
Gyro Brush Co.	144
Hobart Bros. Co.	135-162
Metallic Letter Co.	162
Mills, Albert	163
Public Service Mills, Inc.	144
Rhodes Mfg. Co.	164
Rosecliff Shirt Corp.	151
Sprinkle, C. C.	152
Supravalue Shirt Co., Inc.	153
Thaxley Co., C.	158
United Enterprises, Inc.	148
Whirlwind Mfg. Co.	150

### Miscellaneous

Atlas Solvent Co.	156
Bauer & Black	138
Bureau of Inventive Science	158
Campbell Co., Wm.	132
Crusader Apparatus Co.	160
Du Maurier Company	124
Jowett Inst. of Physical Culture	154
Kelsey Co., The	135
Onan & Sons, D. W.	152
Plymouth Rock Squab Co.	137
Ray, H. E.	163
Scientific Electric Works	128

## Popular Science GUARANTEE



**POPULAR SCIENCE MONTHLY** guarantees every article of merchandise advertised in its columns. Readers who buy products advertised in **POPULAR SCIENCE MONTHLY** may expect them to give absolute satisfaction under normal and proper use.

Tools, Radio Apparatus, Oil Burners and Refrigerators advertised in POPULAR SCIENCE MONTHLY have been tested or investigated by the Popular Science Institute of Standards and each advertisement carries the insignia indicating approval.

However, other products advertised in the magazine not subject to test carry the same guarantee to readers as products tested.


## THE PUBLISHERS

McCarrie School of Mechanical Dentistry..	150
McSweeney Elec. School.....	153
National Electrical School.....	148
National School of Cartooning.....	160
New York Academy of Music.....	148
New York Electrical School, The.....	148
Niagara School of Music.....	151
Northwestern School of Taxidermy.....	142
Perfect Voice Institute.....	154
Pelman Institute of Amer., The.....	158
Radio Institute of America.....	139
School of Engineering of Milwaukee.....	150
Standard Business Training Institute.....	142
Tamblyn, F. W.....	148
Tri-State College.....	146
U. S. School of Music.....	161
Universal Plumbing School.....	144
University of Chicago.....	162
Utilities Engineering Inst.....	146



## WHAT WESTINGHOUSE IS DOING TO MODERNIZE TRANSPORTATION

DRAWN FOR WESTINGHOUSE BY C. PETER HELCK

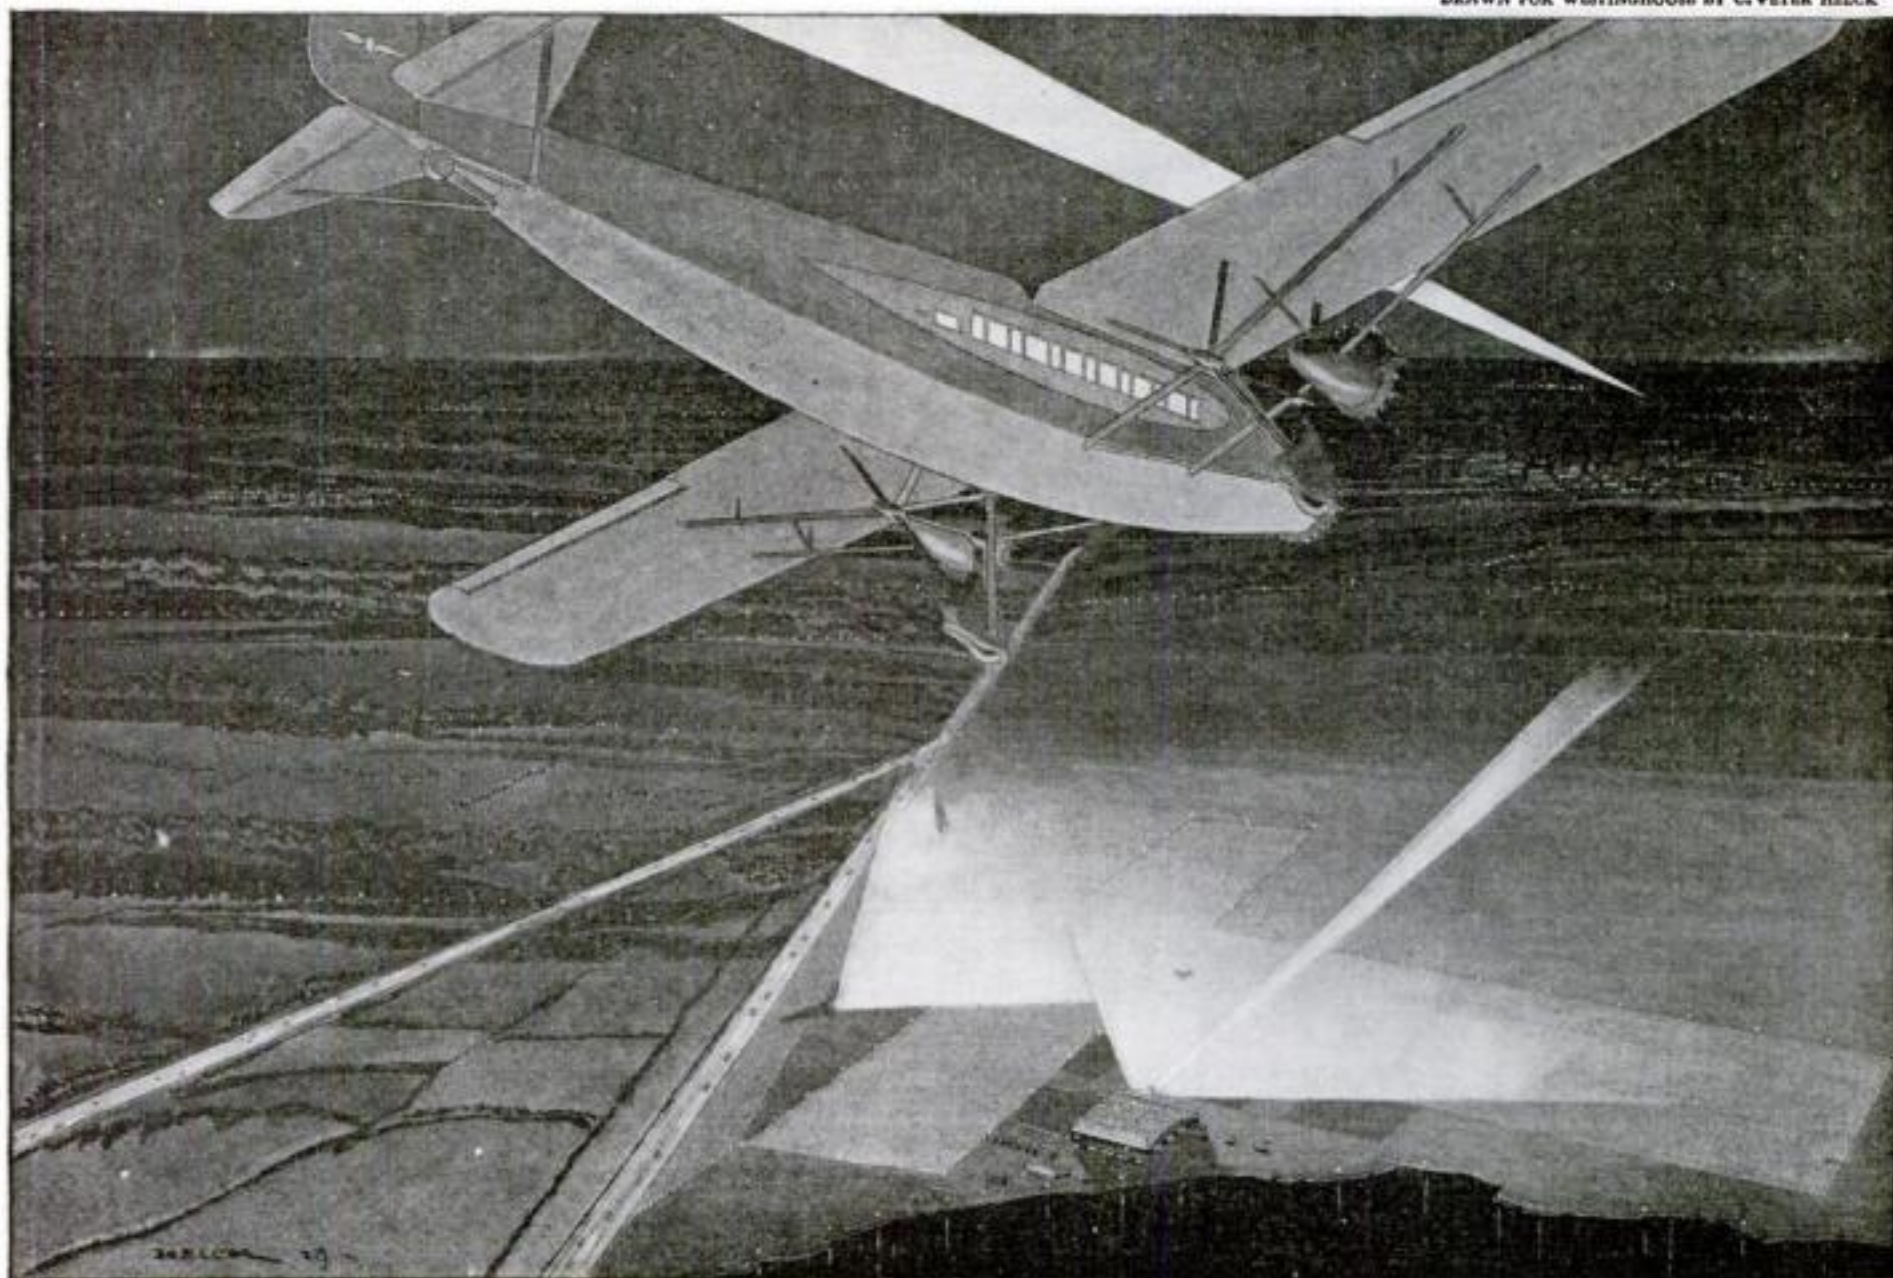

AT NEWARK, N. J., AMERICA'S FINEST AIRPORT LIGHTING HAS BEEN INSTALLED BY WESTINGHOUSE

### Blazing the sky-riders' trail

Through miles of blackness sweep the gleaming shafts that guide night flyers to the welcome of light-bathed landing fields. Flying, which used to be thought of as dare-deviltry, is now "transportation"—safe, reliable, necessary—carried on by night as well as by day. And Westinghouse electrical equipment is an integral part of its safety and reliability.

To blanket broad fields with brilliance free from confusing glare or dangerous shadows, skilled Westinghouse engineers have designed giant projectors, some of them a million candlepower in strength. Wherever they are installed, any airplane can swoop down from darkness into daytime safety for a perfect landing.

Many a cloud-strewn lane, traveled nightly by carriers of the air-mail, is marked by the blaze of beacons, far removed from

ordinary power supply, but provided with unfailing current by means of Westinghouse individual electric plants which can be installed anywhere.


On the planes themselves, moreover, are propellers of tough Westinghouse Micarta, the material that furnished propellers for the "Southern Cross," the "Question Mark," and many another plane which has made aviation history. In airplane factories, also, Westinghouse is a part of aviation; Westinghouse motors give power to

the tools that turn out parts for finished craft—boring, grinding, shaping, polishing, assembling. As aviation expands, Westinghouse will be found serving the future needs of flying with the same skill and co-operation given to past developments, not only in aviation but in all branches of electrification for homes, mines, mills, farms, power plants, and transportation.



# Westinghouse



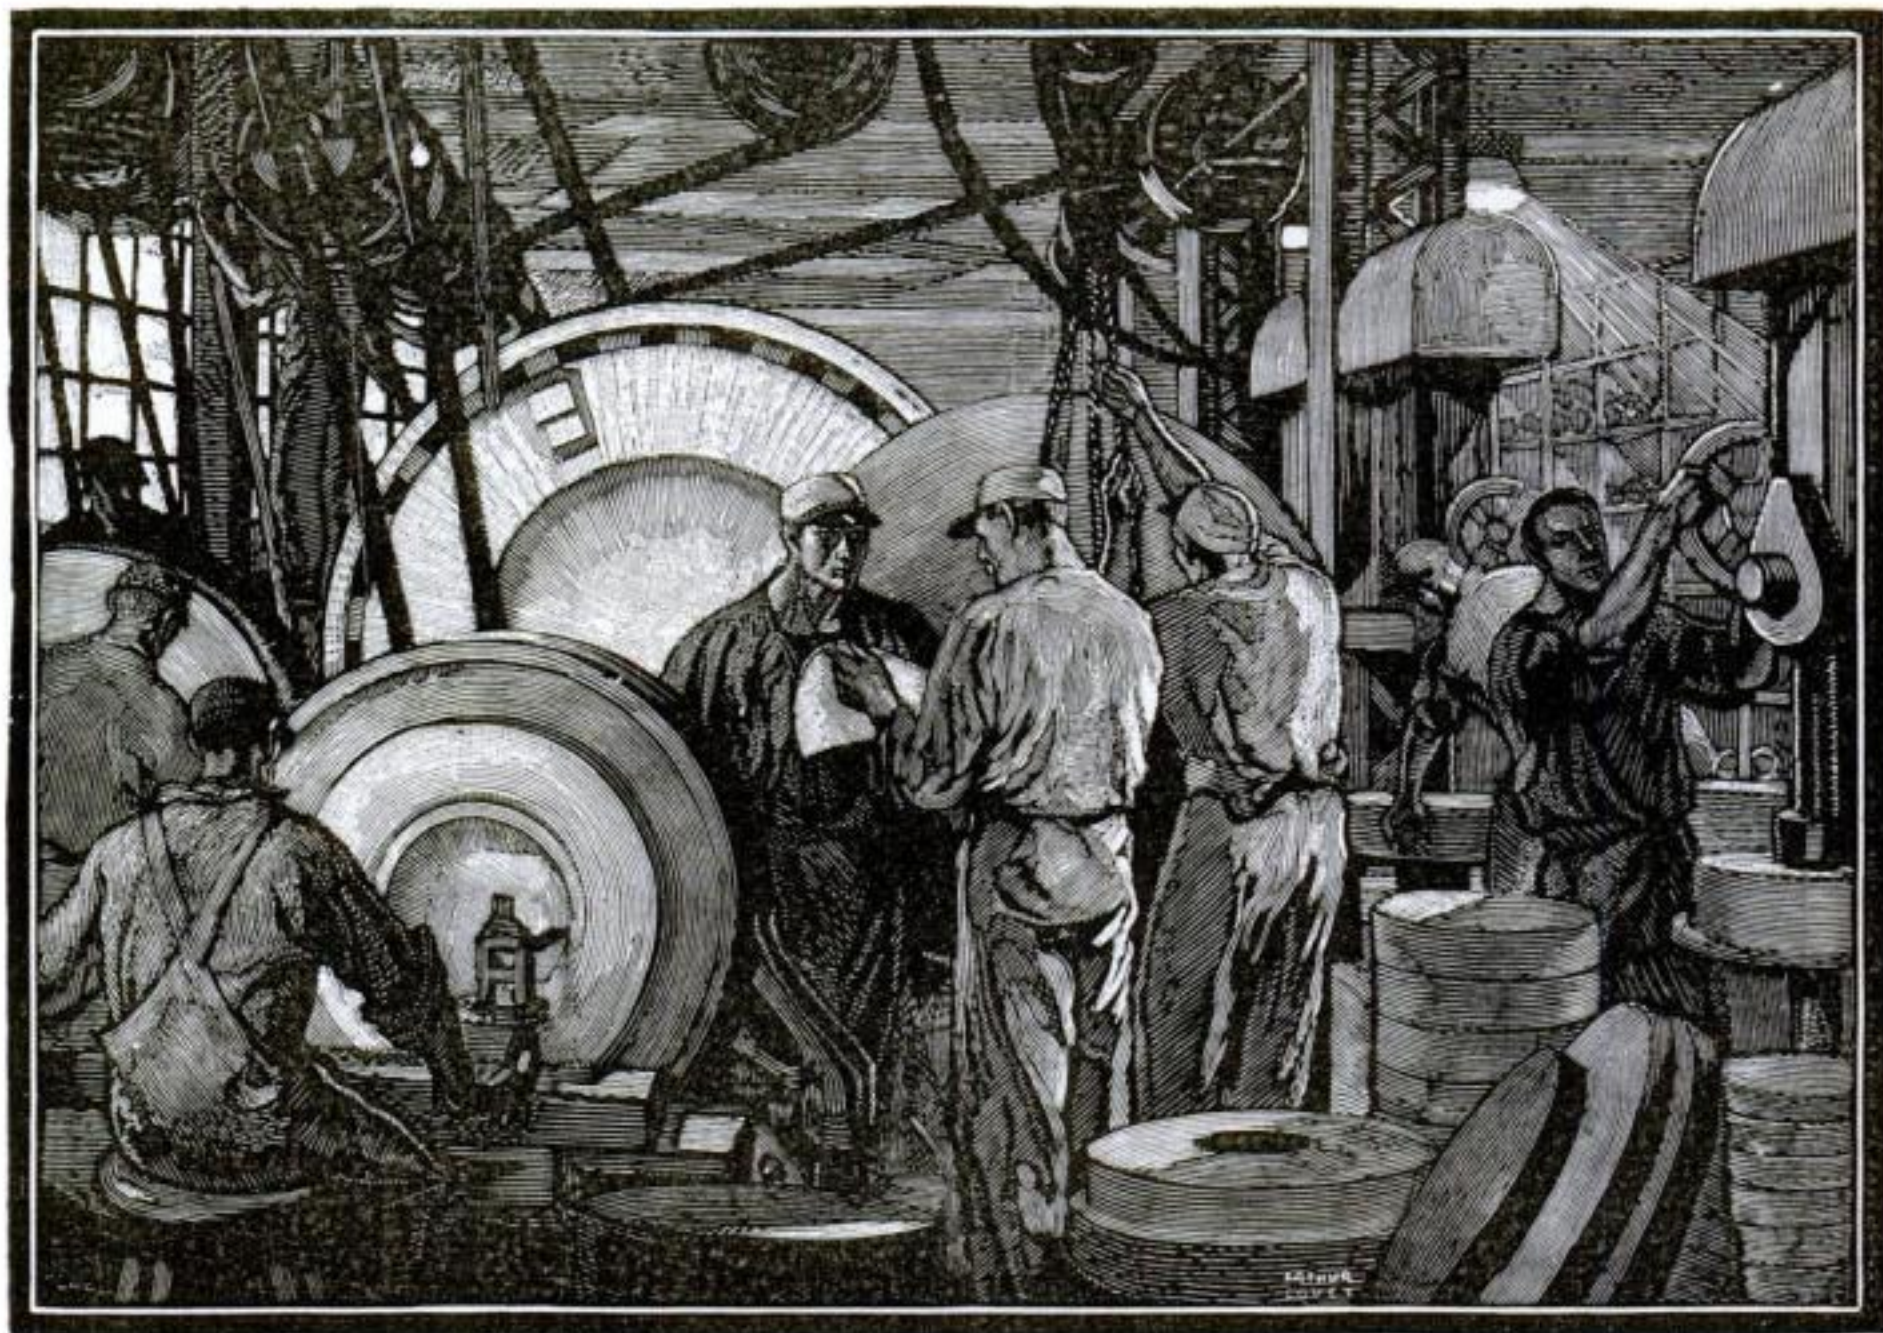

*Mural by Arthur Covey. Wood block engraving by Howard McCormick*

**MILLIONS** of gems, precious stones—tiny cutting tools chemically like the ruby and the sapphire—bonded together to form a Norton Grinding Wheel. The point of a diamond or a tool of hardened steel shapes them to accurate dimensions and they are ready to serve the world in its strife for precision with rapid production.

NORTON COMPANY, WORCESTER, MASS.

# NORTON

Grinding Wheels  
Grinding Machines



Refractories-Floor  
and Stair Tiles



# Now First Published!

## A Completely New

# ENCYCLOPÆDIA BRITANNICA

**N**EW in plan and purpose—entirely recast from cover to cover—the new Fourteenth Edition of the Encyclopædia Britannica is ready. This is the superb “humanized” Britannica which has captured the attention of the whole civilized world.

Three years of intensive effort—the co-operation of 3,500 of the world’s foremost authorities—the expenditure of more than \$2,000,000 before a single volume was printed—these are merely a few high lights in the preparation of the new Fourteenth Edition.

### The Last Word in Encyclopædia Perfection

This new Britannica immediately takes its place as the one pre-eminent American work of reference—the last word in encyclopædia perfection.

Never has there been assembled together in one enterprise such a wealth of learning as is represented by the 3,500 builders of this great temple of knowledge. All the universities, all the learned professions, all the great industries, all the pastimes have contributed to the mighty sum.

### Knowledge for All

It is a law library for the lawyer, a medical digest for the doctor, a universal history for the historian, a commercial university for the business man—and a compendium of all the arts and sciences for the average reader.

Here is “the cosmos between covers.” The whole whirling universe is brought within your grasp, obedient to your hand.

Nothing is too profound to baffle it, and nothing too familiar to escape its informing touch. And on every subject it speaks with the same finality and authority.

### All the World’s Treasures of Art and Illustration

Among the many new features that will astonish and delight everyone that turns these pages is the wealth and beauty of the illustrations. This feature alone marks a tremendous ad-

vance. All the world’s treasures of art and photography have been laid under tribute to adorn and illuminate the text.

“The most exciting book of 1929,” asserts a leading critic, and the whole world is echoing that verdict.

This is a Britannica year! Here is your opportunity to join the thousands who will buy this new edition, now, while it is new—fresh



This handsome bookcase table, made of genuine Brown Mahogany, is included with every set of the new Britannica.

### Note these facts

**Cost More Than  
\$2,000,000.**

**Over 15,000  
Superb Illustrations.**

**Greatest Knowledge  
Book Ever Produced.**

**Written by 3,500 of  
the World’s Most  
Eminent Authorities.**

Remember—this is a new book. Only a small amount of text—material which could not be improved in any way—has been retained from previous editions.

from the presses. You owe it to yourself to learn further details regarding this magnificent series of volumes.

### Extremely Low Price

And due to the economies of mass production, the price is extremely low—the lowest in fact at which a completely new edition has been offered for two generations! Easy payments, if desired—a deposit of only \$5 brings the complete set with bookcase table to your home.

### Send for FREE Booklet

We have just prepared a handsome new 56-page booklet containing numerous color plates, maps, etc., from the new edition and giving full information about it, together with full details of bindings, the present low prices and easy payment plan. We want you to have a copy free and without the slightest obligation.

The demand is great—you should act promptly if you are interested in owning a set of the first printing on the present favorable terms. Just fill in the handy coupon and mail it today.

**MAIL this Coupon TODAY**

ENCYCLOPÆDIA BRITANNICA, Inc. PSM9-A1  
342 Madison Avenue, New York City.

Please send me by return mail, without any obligation on my part, your 56-page illustrated booklet describing the new Fourteenth Edition of the Britannica together with full information concerning bindings, low price offer and easy terms of payments.

Name .....

Address .....

City ..... State .....




# Only High-Grade Tubes Survive

By

F. G. PRYOR

Secretary, Popular Science Institute

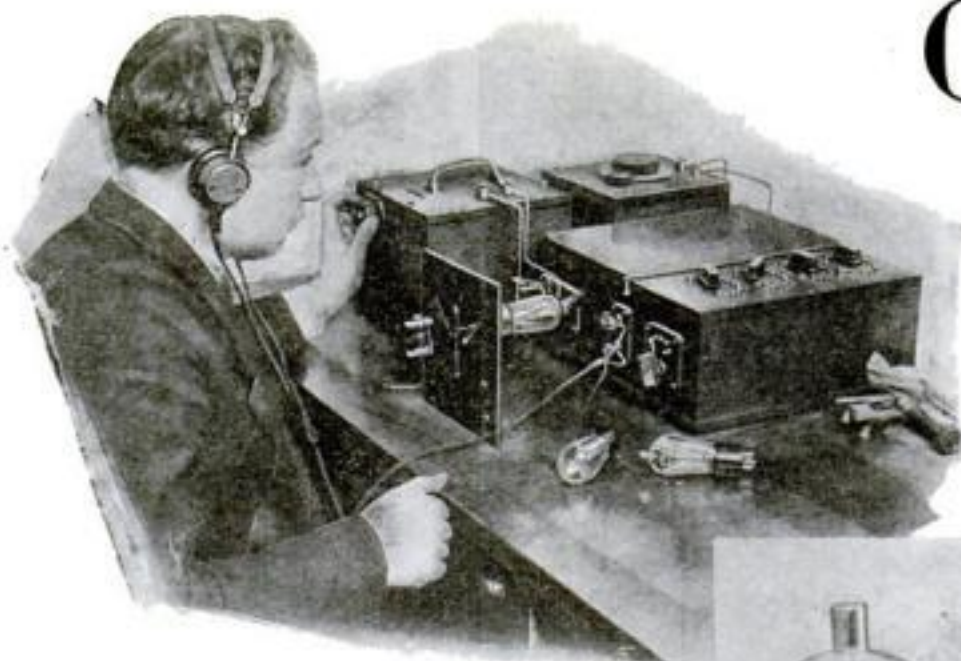

Testing various types of radio vacuum tubes in the radio laboratory of the Popular Science Institute.

## Tests in the Institute Laboratory Show That Inferior Amplifier and Rectifier Tubes Break Down Under the High Power of the Modern Electric Receiving Sets

**S**EVERAL days ago a radio vacuum tube was placed in a test circuit in the radio laboratory of the Popular Science Institute of Standards. There is, of course, nothing unusual about that, because a number of tubes are tested every day in the Institute laboratory. But the action of this particular tube shows what may happen if you are careless about the make of tubes you use in your radio receiver.

The tube placed in the test circuit was a full wave rectifier tube. In appearance it looked exactly like other high-grade tubes of this type. In fact, the only way it could be told from other makes was by the maker's name and type number on the base. The current was turned on. The tube's filament glowed in the usual manner and test readings were taken immediately. According to these readings the tube was a good one. Its current output was up to standard, and if, as is the common practice in radio stores, the tube had been taken out of the socket at once, it would have been passed over the counter as a perfect tube.

**H**OWEVER, Popular Science Institute of Standards tests are far more searching than that, and consequently the current was left turned on and the tube was kept under careful observation. Thirty seconds later the radio expert making the test noted that the tube filament seemed to be glowing more brightly, and before forty-five seconds had passed the filament had reached a temperature so high that the tube began to take on the appearance of an electric light bulb rather than a radio vacuum tube. Fifteen seconds more went by. Then the filament fused and broke. One of the loose

ends of the ruptured filament dropped over against the plate, and for several seconds thereafter there was a beautiful display of flashing blue, red, and green light that finally disappeared, leaving the tube a useless piece of glass fitted to a handsome bakelite base.

Every other tube of the same type from the same manufacturer gave out in the same way. Some lasted as long as two or three minutes; others quit the job in less than thirty seconds.

Needless to state, the name of the manufacturer of these tubes does not appear on the list of manufacturers of products approved by the Institute of Standards; for, if a tube of this type were placed in a full electric radio receiver, either the protecting fuse would be blown or, if the set had no protecting fuse, the power transformer would be burned out, resulting in an expensive repair job.

**M**ODERN radio receivers employ type 227, type 224, type 245, and type 280 tubes, and in most cases the tubes are operated at maximum capacity. It is difficult to manufacture tubes that will give long and satisfactory service when operated under maximum requirements.

It is relatively easy to manufacture a type of 280 full wave rectifying tube to handle the B current requirements of the earlier types of full electric receivers, but an imperfect tube that might have given six months of reasonably satisfactory service in an older type of electric set probably would give out in less than a week in a modern receiver.

Although the internal construction of a vacuum tube does not look particularly complicated, great care and precision must be used in all the manufacturing proc-

esses involved, in order to obtain the most satisfactory results from this sort of tube.


A good tube of any type is one which on test will match with the standard requirements and is free from undesirable characteristics such as insufficient evacuation, sources of unwanted electron emission, and impaired emission from the cathode or filament, depending on the type of tube.

Insufficient evacuation, of course, means a poor vacuum, and, if the manufacturer does not pump out the maximum amount of air and also get rid of the gases embedded in the surfaces of the elements, the tube will be erratic in operation and short lived.

**I**N A vacuum tube there should be a copious flow of electrons from the filament in the case of the type 245 power amplifier tube and the type 280 full wave rectifier tube, and from the cathode in the case of the type 227 heater A. C. tube and the type 224 A. C. screen grid tube. There should be no electronic flow from other elements in the tube. If, for instance, there is in the type 280 tube, a flow of electrons from the plate, there will be a heavy reverse current which will result in overloading the filament and burning it out. In tubes like the 224 or the 227, where the cathode is indirectly heated by the filament (the latter taking no part in the electrical functioning of the tubes), care has to be taken that the extra heat thus required does not overheat the other elements in the tubes and cause unwanted emission. In these tubes the construction also is much more complicated than in the simpler tubes formerly used for battery operation, and in order to obtain proper results the elements must be spaced with an extreme degree of accuracy.

Furthermore, the handling of the tubes during assembly to prevent deforming the delicate structure must be done with considerably greater care. When you stop to consider that in older types of battery-operated sets a receiver that used forty milliamperes in the B circuit was considered a "hog" for current, and compare it with the modern receiver in which B current may be more than 100 milliamperes, it is by no means difficult to see that the type 280 tubes used in modern receiving sets must be up to standard in every way.

This year, more than ever before, it is vitally important to follow the impartial recommendations of the Popular Science Institute of Standards in purchasing radio vacuum tubes as well as other radio apparatus.

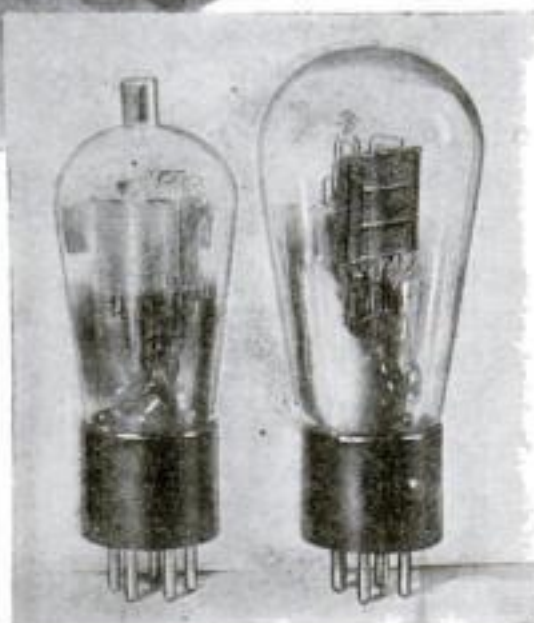


At left: UY-224 type A.C. screen grid tube. Right: UX-245 power amplifying tube.



# How Presdwood is used in making the cores for engine cylinder castings

*Only those who have tried out Masonite Presdwood can really understand how a grainless wood board can improve products and lower manufacturing costs. That is why a sample of Presdwood is gladly sent, without obligation, to executives who are interested in improved production methods.*



FOR CORE TRAYS  
IN FOUNDRIES

In many of the finest foundries, where white hot streams of molten iron are being transformed into automobile cylinder blocks, you will find cores for the molds being baked on grainless wood boards of Masonite Presdwood. They are

boards which are highly resistant to warping, even when exposed to wet sand cores and scorching temperatures that run up to 450 degrees.


The Lakey Foundry and Machine Company of Muskegon, Michigan, is just one such progressive concern where Presdwood is being used for this purpose. In competition with steel plates and other materials, this grainless wood was adopted because of its lightness, strength, hardness and smoothness.

## *For simplified manufacture*

Industry after industry has turned to Presdwood to improve products, lower costs or simplify production methods. Presdwood is used for starch trays in candy factories. It makes sturdy sides for specialty shipping containers, outer panels for incubators and iceboxes, hulls for fast speed boats, weather resisting road signs, side panels for motor truck bodies, light toys, bedroom screens and a score of other useful articles.

Presdwood has no splintering edges to mar the finished work that is done in a factory or to

bother the mechanic who uses it around the home. This grainless wood can be punched, die cut, milled or sanded. It can be sawed, planed or cut with a knife. Presdwood does not split or crack; is chosen by production executives, enjoyed by men and boys who like to make things.



FOR STARCH TRAYS  
IN CANDY FACTORIES

## *In buildings and homes—for paneling*

Presdwood panels fine homes and buildings of the most modern kind. It takes any commercial finish or can be left just as it comes, for it is naturally attractive as well as moisture resisting. It makes decorative floors and backgrounds for show windows, is used at Hollywood for the construction of moving picture sets. There are, in fact, so many striking and varied uses for this grainless material that a booklet has been written which describes eighty of the most interesting uses and attractively illustrates many of them.

The booklet and a sample of Masonite Presdwood may help you find a way to use this grainless material to cut production costs or improve a product. The sample and booklet are yours for the asking. It takes but a postcard to bring them.

### MASONITE CORPORATION


Sales Offices: Dept. 730, 111 West Washington Street  
Chicago, Illinois

FOR SPECIALTY  
SHIPPING CONTAINERS



**Masonite**  
**PRESWOOD**  
*Made by the makers of*  
**MASONITE STRUCTURAL INSULATION**  
REG. U.S. PAT. OFF.

FOR MOVIE STUDIO SETS

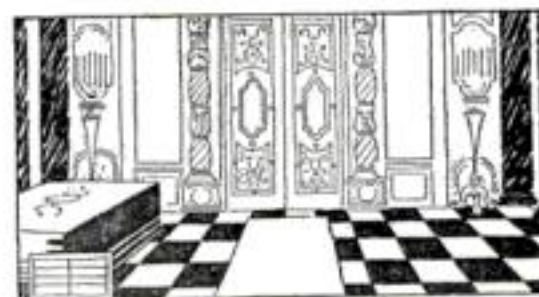



# Our Readers Say—



## Heroes of the "Slab"

"I AM not knocking locomotive engineers, but after reading Arthur Grahame's story, 'At the Throttle of the "Big Hog,"' I am wondering if you realize the importance of a trade which is changing passenger transportation from railroads to motor roads, or the 'slab.'



"I happen to belong to that clan known as 'Bus Drivers.' We have as much, if not more, responsibility than any locomotive engineer in the United States. The bus driver takes his bus out of the station with from twenty to fifty passengers behind him and fights all kinds of weather on all kinds of roads—some that are hardly more than cow paths. He has his \$10,000 or \$20,000 bus to look after in all kinds of traffic, and has to 'think quick and act quicker' to avert accidents.

"I have been on runs that have a forty-mile-an-hour running schedule, and if I pulled into the division point over ten minutes late I was told, 'If you can't make it we have men with a bigger foot' (meaning men who could drive faster).

"If I were a word artist like Mr. Grahame, possibly I could write you a story of our men that would make good reading. Why does not POPULAR SCIENCE have Mr. Grahame do it?"—E. B. H., Topeka, Kan.

## Who Can Match This?

"I CAN'T begin to tell you how interesting I found your series of roto-gravure pictures which showed the early ancestors of modern automobiles. Well do I remember my first car, one of those first glorious Wintons, back in 1902. That was some car.



Since then I have owned eight different machines, every one of which I have driven more than 25,000 miles. I claim this is a world's record for automobile ownership. Is there anyone who can challenge it?"—A. M. D., Lansing, Mich.

## Thank You, Sir

"PERMIT me to give you my opinion on the question whether POPULAR SCIENCE should run more aviation news or not. First, I want to thank Mr. J. P. F., of Chicago, for bringing up this argument. I feel, now, that I will see more about such modern sciences as chemistry, physics, geometry, and television in place of aviation news.

"No sir, I am not interested in aviation as yet. Yes sir, I prefer the railroads to aeroplanes. I have never flown and do not want to fly. Indeed, sir, I would like to see very, very few articles on aviation. Of course, I enjoy reading an article on aviation, once in a great while, but when it comes to the latest, loud colors for planes and the proper way to fix a flat tire while five thousand feet above the ground, I, different from others, do not care for such news in the least.

"Moreover, if I should become interested in

aviation, surely I wouldn't look up to POPULAR SCIENCE for all the news. I would pick a magazine which contained nothing but 'Sky-High' articles.

"I hope that you understand my point clearly and that there will be a big cut in the space devoted to aviation."—S. F., Madison, N. J.

## Might Try It, Lieutenant

"AFTER reading the article, 'Climbs 722 Feet Nearer the Sun,' in which John E. Lodge tells of Lieut. Apollo Soucek's high altitude flight in the *Apache*, I desire to offer a suggestion which Lieut. Soucek might try out in another flight in the same plane.

"When he reached his limit of climb and the plane hesitated, stood on end, and whirled toward the earth, had he been equipped with a plane having wider propeller blades, the other factors being the same, he would have been enabled to catch more volume of 'thin air' and go a little higher.

"My suggestion is that he replace the present propeller blades of that *Apache* plane with blades having, say, twice the area, and although the propeller's weight will be increased proportionately, I 'guess' that the *Apache* will go higher, at least 722 feet more than before. In taking off and rising, while in normal air, he may desire to offset the change by utilizing less than usual speed and then get all the advantage possible from the widened blades, say, above 10,000 feet altitude, when his super-charger is giving desired effects."—N. G. W., Gallipolis, O.



## A Matter of Type

"I THINK you could afford to use more type on aviation, and less on how to build furniture."—G. A. P., Chicago, Ill.

## Ship Ahoy, Girls!

"I HAVE finished the *Mayflower* model from your blueprints and desire to thank you for the inspiration to make it and for the help of the articles and prints. Apart from being a beautiful ornament, my boat has developed a useful role. One friend, a school teacher, asked to borrow it for a history class. I let him have it and he told his pals. It is sailing for a big girls' school tomorrow on its next trip. You may like to know that my total expenditure for the *Mayflower* was just eight shillings—less than \$2. Needless to say, I made every block myself. A dealer has valued it at 50 pounds, over 120 times its cost."—S. C. H., Fishponds, Bristol, England.

"I have followed your models in POPULAR SCIENCE for some time and have built the Spanish galleon and the *Constitution*. The former sold for \$50 and the latter for \$15. I am going to build your racing yacht model next. I have POPULAR SCIENCE from January, 1926, every copy, and enjoy getting them out and reading them every so often."—G. E. S., Chicago, Ill.



## Here's Another Worry

"IF YOU will open a can of peaches or a can of any other fruit containing a clear syrup of high specific gravity and examine the surface of the liquid while holding the can in bright sunlight, you will notice from ten to thirty little glittering specks of metal ranging up to the size of a pin head.

"These specks are produced by the can opener as it cuts open the lid. All consumers of canned foods, unless they take the trouble to scrape off the top of the contents of the can before emptying it, are taking into their systems a quantity of metal. I do not know if these little particles have anything to do with appendicitis, because of their possible lodgment and irritation in the appendix, but I do believe they must be harmful to the system.

"I believe manufacturers of canned goods should use only cans equipped with tongue and key devices like those used to open sardine cans and canned meats, and lately adopted by tennis ball manufacturers who sell their product sealed in cans."—D. H., East Vaughn, New Mexico.




## Let's Ask Einstein

"YOUR article on perpetual motion by Edwin W. Teale assumes that such a thing is impossible and sets forth reasons why all attempts at inventing perpetual motion machines must fail. For a magazine which is constantly reminding its readers of inventors who have 'done the impossible,' isn't this a rather illogical position to take?

"Just because the U. S. Patent Office says that perpetual motion is impossible, does that make it so?

"Assuming that some day it may be possible to insulate against gravity, as indicated by Einstein's latest discoveries of the relation of electricity and gravity, would it not be entirely possible to invent an overbalancing perpetual motion wheel, one side of which was insulated against gravity, the other side not? What would prevent such a wheel from running forever? I want to know."—S. P. N. R., Dayton, O.



## From A Church Pastor

"LAST winter I began to cast about to see if I could not find some way in which to make my Sunday evening service different, with the idea of increasing the interest and also the attendance. I fell on the plan of giving a ten-minute talk before the sermon, and these I call 'Talks on the World About Us.' My files of the 'P. S.' have already given me a number of these and will give me many more. People seem to be enjoying them and a number have told me not to discontinue them whatever else I may do."—E. P. A., Vale, Ore.



*You'll never know  
how cool and pain-  
less a shave can be  
until you use Lister-  
ine Shaving Cream*



## *cools .. AFTER SHAVING .. protects*

If you want a real treat in face comfort, do this tomorrow morning after you shave: Simply douse full strength Listerine on your face.

Immediately you note a glow of health—a tingling, zippy sensation that wakes up your skin.

Then, as Listerine dries, a wonderful feeling of coolness, as though a moist sea breeze were blowing against your cheeks. Gone that

feeling of rawness. Gone that burning sensation.

Moreover, it eliminates the risk of infection. Because full strength Listerine, though safe and healing in action, kills germs in counts ranging up to 200,000,000 in 15 seconds.

Some men are so delighted with the freshening effect of Listerine on the face that they employ it

before important engagements at which they must look their best. Try it yourself sometime. Lambert Pharmacal Company, St. Louis, Mo., U. S. A.

### *Try it, madam, as an* **ASTRINGENT**

The same qualities that make Listerine soothing after shaving, recommend its use by women as an astringent. Incidentally, it is a very economical one. Your wife will be glad to know about it.

*the safe antiseptic* **LISTERINE**

**Kills 200,000,000 Germs in Fifteen Seconds**



# Popular Science MONTHLY



TRAVIS HOKE, *Editor*

RAYMOND J. BROWN, *Managing Editor*  
ARTHUR WAKELING, *Home Workshop Editor*  
ALFRED P. LANE, *Technical Editor*  
EDGAR C. WHEELER, *Associate Editor*  
ISRAEL DOSKOW, *Art Editor*  
E. E. FREE, *Contributing Editor*

Published Monthly by Popular Science Publishing Company, Inc., 381 Fourth Avenue, New York City. Single Copies Twenty-five Cents. In the United States and Its Possessions and in Canada, \$2.50 the Year. In All Other Countries, \$3.00 the Year.

## Adventuring with Rockets

**W**HO, young or old, does not respond to the thrill of fireworks, and of the skyrocket most of all?

Exciting adventures of Prof. R. H. Goddard, and of his nine-foot rocket that scared Worcester, Mass., into thinking a falling meteor had exploded, are a part of a project that captures the imagination. His plan to shoot one of the fiery projectiles so high that it may even leave the earth forever, described elsewhere in this issue, savors of a Jules Verne romance. Yet his is a sober, scientific purpose—to study the weather two hundred miles or more aloft. While others have talked of shooting rockets to the moon, Professor Goddard's success thus far proves him the most practical of the lot.

Professor Goddard is an inventor of no mean ability. At present the high-altitude rocket is but one of his remarkable projects. He has just revealed that he is working upon a device of possibly revolutionary importance, as novel in the field of power as is his rocket in the study of high-altitude weather. POPULAR SCIENCE MONTHLY is privileged to present Professor Goddard's own description of this extraordinary invention in a coming issue.

## Health Lamps—or Mustard Plasters?

**W**HAT a shock it must have been to the makers of health lamps in this country, and to a number of medical authorities as well, to hear the British Medical Research Council recently declare that the only difference between light treatment and mustard plasters was that mustard plasters were cheaper! Referring to popular interest in the use of electric lamps in the home to produce the rays of artificial sunlight—including the invisible "ultra-violet" rays that have certain curative powers—the Council declared:

"When conditions between children with and without (light) treatment are equalized, the result of light treatment is wholly negative."

Perhaps that statement might better have been left unpublished. Casually read, it is only too easily interpreted to indicate that so-called health lamps, in plain language, are "no good." If this is the real belief of the Council, it is certainly in direct contradiction to learned medical opinion on both sides of the Atlantic—as exemplified by the widespread use of "sun lamps" in hospital clinics, and, recently, for the treatment of the British sovereign himself.

The facts are, most authorities agree, that lamps generating

ultra-violet rays have definite therapeutic value, notably in rickets; also that their exact physiological effect is still far from perfectly understood. It would not be surprising that many physicians, seeing laymen welcome the lamps as cure-alls for every conceivable body ailment despite ignorance of their limitations and positive dangers in careless hands, should deprecate a new form of treatment that unquestionably deserves much more careful research than it has received.

## A Real Endurance Test

**M**AN or machine—which will outlast the other? That was the question crowds at a St. Louis, Mo., flying field asked recently, while overhead soared a plane which had been aloft so long that its official barograph had run down and it had to be timed by observers on the field.

When Dale Jackson and Forrest O'Brine, the plane's two pilots, finally obeyed an order to land after having been in the air more than seventeen days, the contest was still a draw. The men were fresh and walked on steady legs despite their two-week confinement in the plane's small cabin. The plane, and its motor, too, were in perfect condition to fly indefinitely.

Eventually the rivalry between human flesh and machine steel will be settled by other adventurers in the air. Should it then appear that man is inferior in stamina to his motors, endurance flights can be removed from any possible classification as impracticable stunt flying by this simple expedient:

Let relief crews of pilots be sent aloft to replace the men in the cockpit from time to time so that the flight will last long enough to be a thorough test of the motor. It is entirely possible to do so; more than once men have transferred from one airplane to another in full flight. Then the result will be a real test of a motor's stamina.

## The New Chemistry

**W**HAT is colloid chemistry? And, excepting always the chemist in his laboratory, who cares?

Many-hued baths of gold solved a mystery of vital interest to give birth to colloid chemistry, a new explanation of the actions of familiar objects. Its name means literally "the chemistry of things like glue," and it deals with the curious properties of familiar substances when they are subdivided into particles of a certain very small size. It tells what makes chocolate-cake icing brown; how soap chases dirt; why shaving cream aids the razor. As told in an article elsewhere in this issue, never before were the things called colloids so important in the everyday life of the average man.

Hidden beneath such formidable names as "Brownian movement," "Tyndall effect," and "flocculation," fascinating events go on in the submicroscopic world of colloids. Why egg clears grounds from coffee, how jelly jells, and why stamps stick to letters—that is the domain of colloid chemistry. When a modern girl brushes her lips with lipstick that attaches itself with a pressure of 200,000 pounds to the square inch, even that is a triumph of the colloid chemist.

Everyone uses this new chemistry, though few understand it.

## They are Saying—

**W**OMEN are less troubled by disturbing dreams than men, probably because they have less work and worry." —Dr. Bernard Hollander, British alienist and criminologist.

"Dismiss the idea that natural law may swallow up religion. It cannot even tackle the multiplication table singlehanded." —Prof. A. S. Eddington, Cambridge University physicist.

"Scientists need to present the facts so that the public can understand and emotionally believe them. The public knows about science, but does not actually use it." —Dr. Otis W. Caldwell, director, Institute of School Experimentation, Columbia University.

"A tissue that has died can no more be restored to life than can new elasticity be put in a pair of worn-out suspenders." —Dr. Morris Fishbein, secretary, American Medical Association.

"The next logical development of airplane duration tests should be endurance flights over present or proposed commercial air routes." —Maj. C. M. Young, Acting Assistant Secretary of Commerce for Aeronautics.

"The world does not require faster and more neurotic persons, but urgently needs more accurate and dependable ones." —Dr. Lloyd Mills, Los Angeles, Calif.





## Rob yourself of sleep . . .

*but you can't rob the Gillette Blade of its sure, smooth shave*

A FACE drawn and tight from lack of sleep, a slapdash lather and a hurry-up shave—it can't ruin the even temper of a Gillette Blade, even though it may wreck your own!

On such mornings lather extra thoroughly and treat yourself to a fresh Gillette Blade. You're sure then of the smooth, even, comfortable shave which has been honed and stropped into every Gillette Blade by machines adjusted to one ten-thousandth of an inch.

Every Gillette Blade *must* be even and sure. To guarantee that,

four out of every nine of our blade department employees are inspectors and are paid a bonus for detecting every blade that won't do a superb job of shaving.



THE only individual in history, ancient or modern, whose picture and signature are found in every city and town, in every country in the world, is King C. Gillette. This picture and signature are universal sign-language for a perfect shave.

No two men have identically the same kind of beard. No man gives his Gillette the same kind of job to do every morning. A dozen varying conditions affect the comfort of your shave. The Gillette Blade alone remains constant.


Eight out of ten American men count on the Gillette Blade to do its job *well* every morning. It does. Witness the smooth faces of American men today. Gillette Safety Razor Co., Boston, U. S. A.

# Gillette





# IT'S HEATING THE OUTSIDE OF YOUR HOUSE THAT'S COSTLY

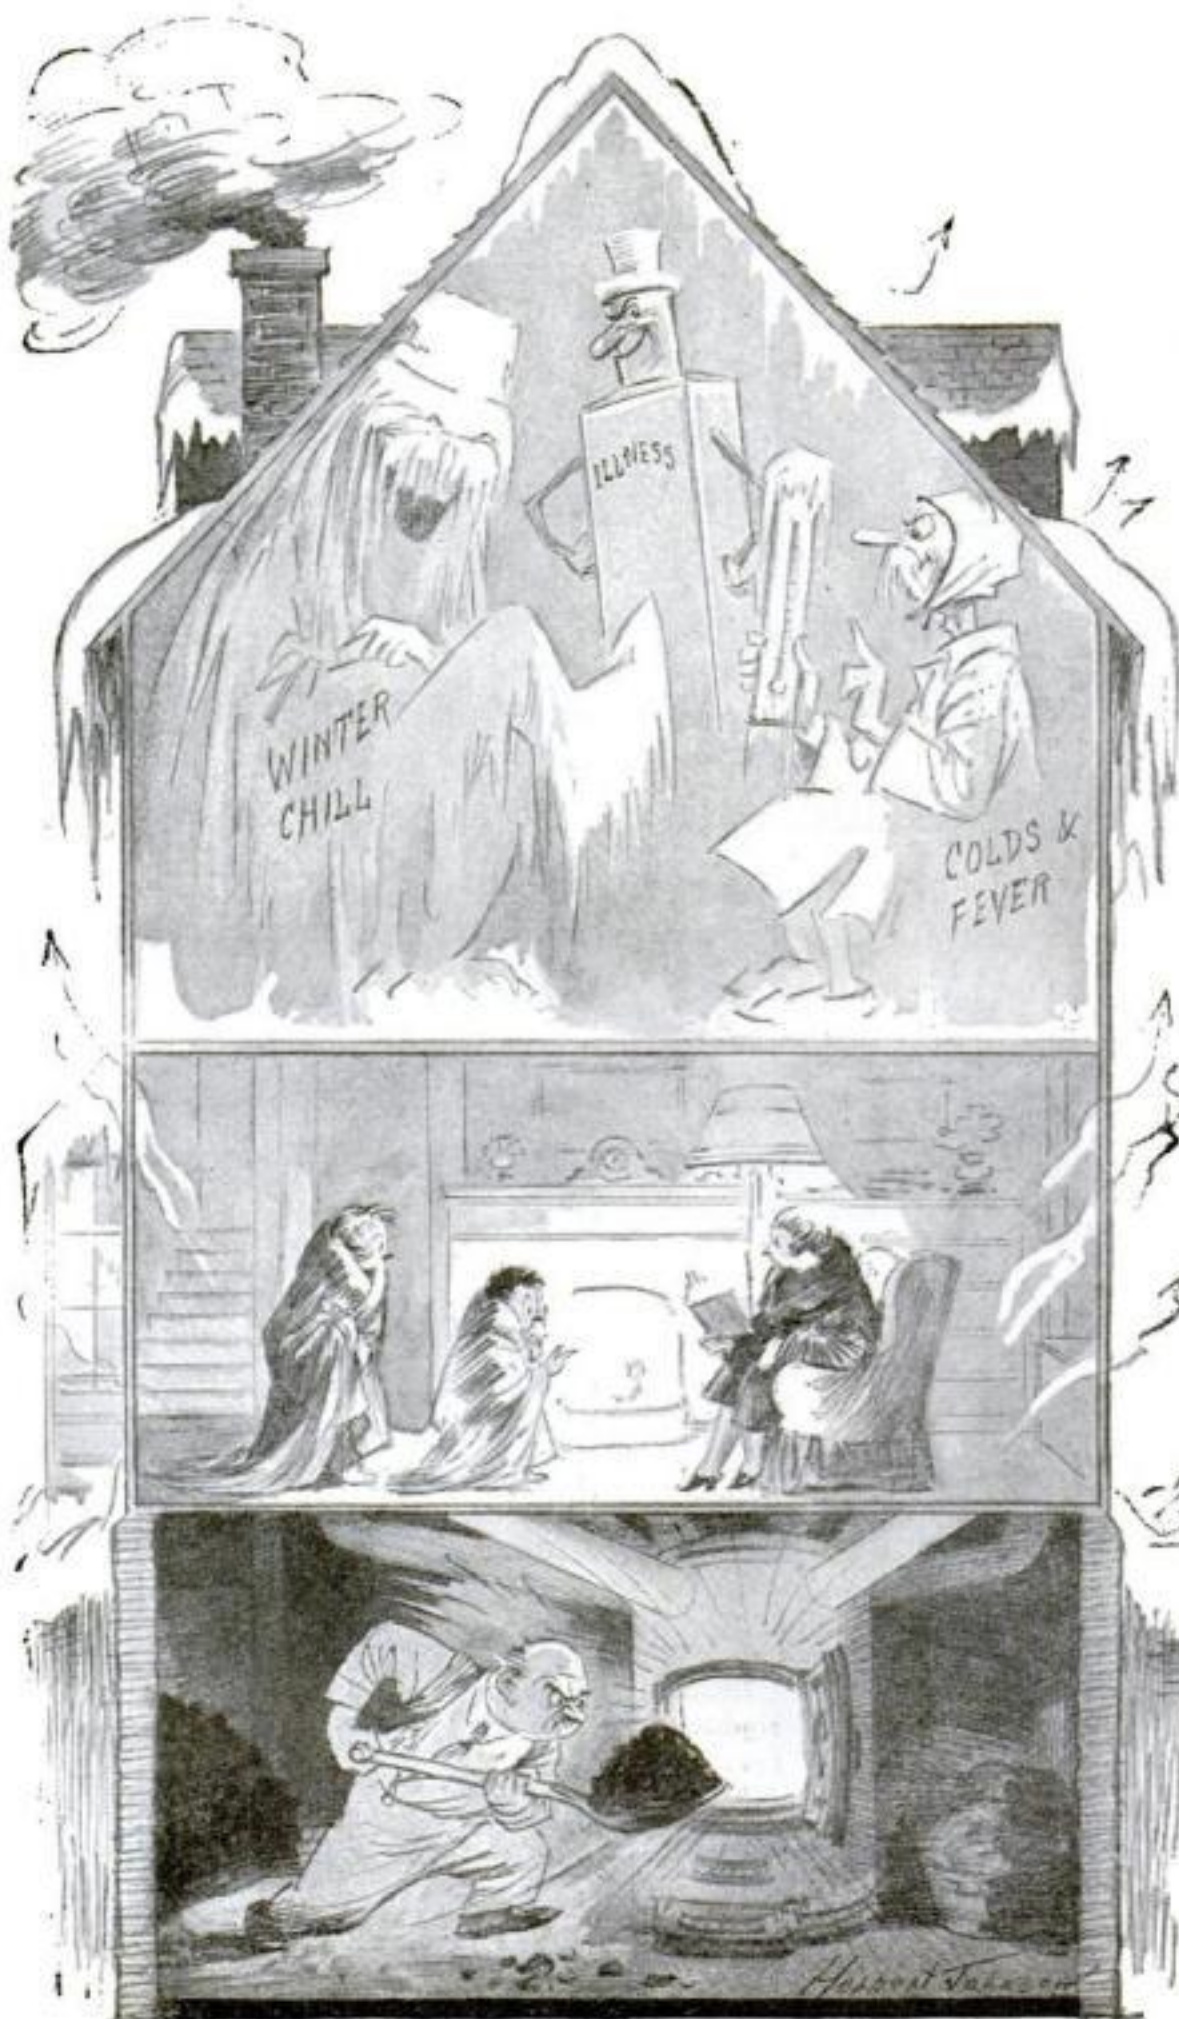

SO why not reduce fuel bills 25 per cent or more, and increase home comfort besides, by holding furnace heat *inside* with cane-fibre insulation?

Old homes as well as new can enjoy these advantages, because Celotex, the *only* cane-fibre insulation, is ideal for repair and remodeling.

Roofs insulated with Celotex *retard* furnace-heat-leakage . . . protect the entire house from penetrating chill and dampness.

Waste spaces in the attic and basement, when lined with Celotex, are changed into delightful nurseries and playrooms; open porches are transformed into sun rooms, enjoyable all seasons of the year.

Celotex combines insulating efficiency with structural strength, because nature seems to have intended cane-fibre for both purposes.

These fibres—long, tough and durable—interlace perfectly into big, strong boards 4 feet wide, 7 to 12 feet long and 7/16 inch thick, also made "double thick"—7/8 inch.

And they contain millions of tiny sealed air cells . . . just what is needed for *dependable* insulation.

When used on the outside of houses, as sheathing, Celotex adds structural strength . . . makes walls tight and permanent.

And on inside walls and ceilings, you can obtain finer, smoother plastered surfaces with Celotex Lath.

Before you build, buy or remodel, ask your architect, builder or dealer for further information on Celotex — and write us for our free booklet, "Year 'Round Comfort and Fuel Saving for Every Home."

The Celotex Company, Chicago, Illinois. (Member of the Home Modernizing Bureau of the National Building Industries, Inc.) In Canada: Alexander Murray & Co., Ltd., Montreal. Sales distributors throughout the world. Reliable dealers can supply Celotex Standard Building Board and Celotex Lath.

## CELOTEX

BRAND  
INSULATING CANE BOARD

When you buy a new house, look for the Celotex sign.  
It is your assurance of greater home comfort.

The word  
**CELOTEX**  
(Reg. U. S. Pat. Off.)  
is the trademark of and  
indicates manufacture by  
The Celotex Company  
Chicago, Ill.

**BE SURE IT'S CANE-FIBRE INSULATION!**

Only Celotex is made from the long, tough fibres of cane. The peculiar advantages of cane-fibre insulation cannot be obtained in any other material. Be sure you get **CELOTEX!**





## Barnstorming with Lindbergh

**H**ERE, for the first time, "Slim's" old pal and flying partner relates one of the most colorful yet least known chapters in Lindbergh's career. With intimate, human anecdotes, he recalls the care-free days of 1924 when "Slim" wing-walked with him, or shared the thrills of a dead-stick landing.

Randy Enslow is known today as one of the most skillful of American pilots. Readers of POPULAR SCIENCE MONTHLY are well acquainted with him as the flying instructor who helped Larry Brent to find his wings. His simple, straightforward narrative is perhaps the most extraordinary Lindbergh story ever published.

By RANDY ENSLOW

**L**INDBERGH and I started barnstorming by accident. It was this way. We were both living in St. Louis in 1924. He had sold an old war-time "Jenny" to a boy living up at Oelwein, Iowa. The kid gave him a deposit of twenty-five dollars, or something like that, and flew off home. He was supposed to send some more money each month until the plane was paid for. When nothing came from Oelwein for three months, "Slim" asked me to fly him up to see what was the matter.

I had built a J-1 Standard, the type of ship the Army used to train pilots on before the war. It was built with homemade spars, a secondhand engine and rusty fittings that I painted over. But it flew like a bird. When we climbed aboard, we didn't have much money in our pockets. We never did in those days.

**A**T OELWEIN, we found that the boy had gone off as a traveling violinist with a carnival. His mother had sold the "Jenny" for five dollars. She said she was afraid somebody would get hurt by the propeller. The buyer had come down in a perfect one-point landing—right on the nose—the first time he tried to fly the ship, and it was a total wreck. So we started barnstorming to pay for the trip.

Our stock in trade was carrying passengers. But we would do stunts and wing-walking and put on little one-plane air circuses of our own. We did every-



Randy Enslow and his plane, when he was barnstorming with Lindbergh. Right: When "Slim" tried to retrieve the oil can that jammed the throttle.

thing that would bring in dimes. Sometimes we would race automobiles at country fairs. We got \$75 for each race. Above those little half-mile dirt tracks we would have to bank the plane almost straight up and down and buzz around like a fly in a bottle. As I remember it, we always won.

But we used to throttle down the motor until the last lap to give the spectators a run for their money. On that last lap, we would show the boys what the ship could do.

**O**NCE we flew into a town with "Slim" on the wing. When we landed, an old lady came up and asked: "Which one of you young men was that out on the fender?" "Slim's" favorite joke in those days used to be the one about the farmer who saw a pilot crack up in his cornfield and wipe off the landing gear and break the propeller. The farmer's wife asked her husband what happened. "Oh, not much," he said; "he just broke the truck and the paddle."

From Iowa, we barnstormed down into Missouri and then over into Illinois, spending most of a year at it. After I'd been out on the road for a week with "Slim," I always investigated a bed before I jumped into it. If I didn't, I usually sat down on a cocklebur or had June bugs crawling up my back. I got so I kept an eye on him during the day. If I saw him stoop over







Randy. Cross-country ace of the Curtiss Flying Service and one of America's foremost pilots.

and pick up anything as we walked across a field, I knew it was another cocklebur or bug, and governed myself accordingly.

On one of our barnstorming trips we left St. Louis with seventy-five cents between us. "Slim" flew the ship down to Greenfield, Mo. The school children heard us buzzing around overhead just before recess. When we landed, it broke up the school. All the kids came out and a bunch went up for rides. After a while the teachers and the townfolk came along and went up too. We would take turns at the stick. By night, we had a hundred and seventy-five dollars. I'll never forget how "Slim" dumped it all out on the bed in the hotel. The pile looked as big as a strawstack.

At night, we would stake the ship down, or tie its tail to a stump and leave it backed into the wind like a Missouri mule. One time, when we left it tied down like that in a field in Illinois, a tornado came through the country and headed right that way. But just before the twister reached the spot, it gave a jump and came down several miles beyond. The ship wasn't even scratched.

ON THE trips, I used to take along a mouth organ to play in the hotel rooms at night. "Slim" used to hide it every chance he could get. He was afraid I would keep the other people awake. He used to have a tough time getting me out of bed in the morning until he invented a "booster." It was a little electric generator with a wire attached. "Slim" would slip the wire between my toes and turn the crank. He

always managed to get outside the door before I could reach him.

One night, we stopped at a town where I had friends. I made a date with two girls for "Slim" and me. When the time came to go out, he had disappeared. I had to take both girls myself. When I got home, he was sound asleep and the next morning he got me up with his "booster" just as though nothing had happened.

Knowing the way he loves a practical joke, I can imagine how he enjoyed giving the reporters the slip on his honeymoon. He let me in on some of the fun. I was one of the

handful who knew he was out in his motorboat when the papers were reporting him in a dozen places at once. I flew his Falcon plane from Curtiss Field as though to meet him, to throw reporters off the scent.

As soon as I climbed into the cockpit to warm up the motor, a fast Fairchild-Wasp was wheeled out of a hangar behind me. When I took off, the Fairchild was right on my tail, carrying newspapermen. I headed north over Long Island, gaining a couple of miles an hour on the Fairchild. I kept climbing for altitude, watching a fog bank that was rolling in below. About thirty minutes out from the field, I did a wing-over, dove into the fog and headed back toward New York, flying blind. When I thought I was nearing the big

buildings, I zoomed up out of the fog and looked around. Nobody in sight. So I scooted for Schenectady and started the

"We always flew into town with one of us walking the wings to attract attention."



"To get me up, 'Slim' would slip his 'booster' wire between my toes and turn the crank."

papers off on another wrong lead. I have seen Lindbergh half a dozen times since he flew to Paris. Each time he has been the same old "Slim." If he has changed at all, it isn't in the direction of forgetting his old friends. That I know.

We always flew into a town with one of us out walking on the wing to attract attention. Then we would throw out a couple of hundred little handbills, printed on yellow paper. We had worked out the wording together. It read:

COME OUT AND GET ACQUAINTED

THIS SHIP IS MADE OF WOOD  
AND WIRED TOGETHER

THE WINGS ARE NOT  
COVERED WITH TIN

IT DON'T BACK UP

THEN we would land in a cow pasture or baseball park and invite passengers to go up at five dollars a ride. If nobody went up, we would fly away. Later, we would come back. When the people saw they couldn't keep us unless somebody went up, they got air-minded and climbed into the cockpit.

I remember one time we were coming into a little town near Macon, Mo. "Slim" was doing his stuff out on the wings. We usually circled around a place two or three times to get everybody out and then came down in a careful landing to impress people with the safety of flying.

This time, we kept on circling. "Slim" looked over to see why we didn't go down. I made motions, pointing to the throttle. He crawled in to see what was the matter. I shouted in his ear:

"The throttle's stuck. Can't shut the motor off."

So "Slim" crept to the front of the wing and poked his hand in back of the engine. He found a can of motor oil we carried for emergencies had jarred under the throttle arm and wedged. He tugged and pulled, but couldn't get it out. He told me to cut the switch and down we came in a dead-stick landing.

BUT that was nothing new. We were always making dead-stick landings. The only instruments in the old Standard were a tachometer, an altimeter, and an oil pressure gage. And sometimes they didn't work. Water would get into the gas tank, or maybe dirt—we couldn't take any too good care of the ship oftentimes—and down we would come with a dead engine.

The toughest forced landing I ever made was my first. "Slim" and I were flying over rough country in Iowa when the motor quit cold. The only level spot under us was a sink hole about ten or twenty feet below the rest of the ground. It contained less than two acres and there was a big strawstack right in the middle of it. I had to side-slip in and then ground-loop around the stack to keep from cracking up the ship.

We always flew from one town to the next with the wind. It saved time and gas. We would go to bed planning to jump to one town in the morning, and if the wind changed during the night we



would go to some other town in the direction the wind blew. Wherever we went, we always "blew in."

Once, when the wind was blowing toward St. Louis, we flew home. We were dead tired when I set the ship down about dark in a field across from our house. A. W. Moyer, who has been my step-dad since I was eighteen months old, heard us come in and headed for the kitchen. He had a big skillet full of eggs frying on the stove when we came in the front door. "Slim" flopped down on the Davenport, with his legs hanging over one end, and I sat down beside him, propping my head up with one hand, to wait for supper. We tried to stay awake, but we both passed out before the eggs were cooked.

"SLIM" was the cleanest fellow I ever knew. He didn't smoke or drink or swear. He had more nerve and could do more with an old crate than any flyer I've seen. The greatest exhibition of nerve in the air I can recall was the time "Slim" came closest to being killed.

He was testing a new ship for Ben Bell in St. Louis. I stood in front of one of the hangars watching him. At 3,000 feet, he tried to put the plane into a right spin so the torque, or twisting force, of the motor would help him get it out. He tried three times, but couldn't get it to spin. So he put it in a left spin and down he came. For a thousand feet, with the wires screaming so they could be heard a mile away, he struggled to bring the ship out of that spin. Then he crawled out on the fuselage back of his seat, hanging on like a leech, ready to jump with his parachute. But he didn't jump. He pulled himself back into the cockpit again and came down 1,700 feet more, trying to save the ship. He was only 300 feet above the

ground when he jumped, but he wasn't hurt a bit.

We barnstormed around in winter as well as in summer. One morning when we woke up in a little place near Albia, Ia., we found the ship covered with snow, and icicles hanging down from the wings. "Slim" knocked a few off with a stick, and we started up. By the time we had flown ten miles, every icicle had been blown away.

In winter, we made more forced landings than in summer. The throttle arm ran through a little copper tube by the motor. Above it, a connection in the cooling system dripped water into this tube. That was all right in summer. But in winter the water froze solid with the throttle open. We would cut the switch and come down with a dead stick. "Slim" was usually elected to dig out the ice with his jackknife or to melt it with a match. Then up we would go again. One time we made five dead-stick landings in one day. We had to sit down in everything from back yards to cornfields. But it was great training. No flying experience gives more all around training than a year of barnstorming.


One of our last stands was a little town near the Mis-



Lindy. "If he has changed at all, it isn't in the direction of forgetting his old friends," says Randy.



"'Slim' flopped down on the Davenport, and I sat down beside him, to wait for supper. We tried to stay awake, but we both passed out before the eggs were cooked."

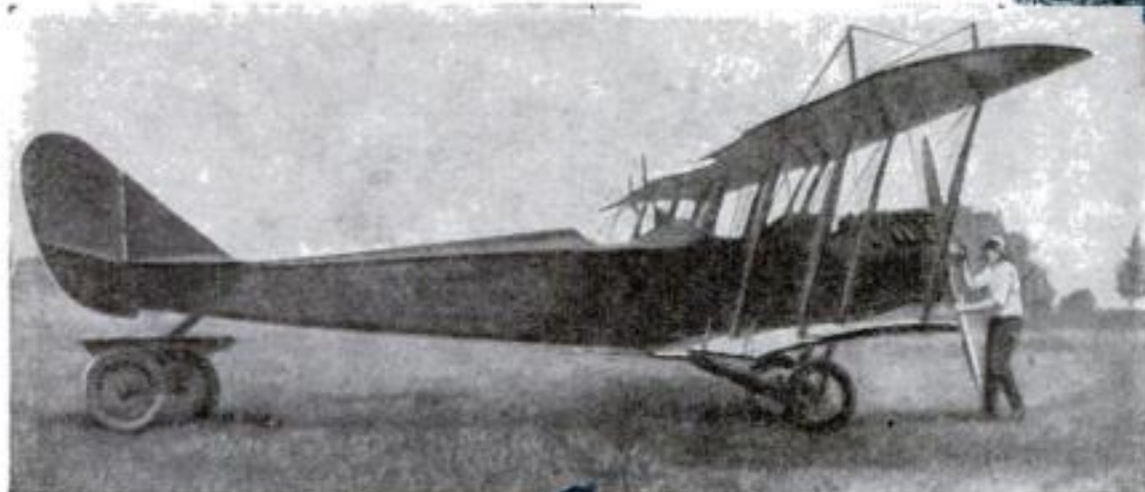

Lindbergh cranking old "Jenny" that launched him into barnstorming. A rare photo that was never before published.



"Up to my old trick of chasing brakemen off the freight trains. I would dive and skip along the cars."

issippi, in Iowa. For a couple of days we hopped passengers out of a baseball field almost completely surrounded by billboards. The morning we left, "Slim" cranked the motor. It started off, sputtered, started again. Probably water in the gas. There usually was. I decided to take her up for a turn of the field before we started. I got over the billboards, all right, but the power was so low that I flew almost all the way to Monmouth, Illinois, to get enough altitude to turn around and come back and put in new gas. I guess "Slim" thought I had started off for a distance record.

When we weren't out barnstorming, we would be flying at Lambert Field in St. Louis. Once we tried "baching it," living at one of the hangars at the field. Every so often we would get hungry for a

real meal. My home was on a farm about a mile away. We would climb into the Standard and fly out for some of mother's cooking. After we had circled the house with the engine wide open as a signal that two hungry men were coming, we would set the ship down in the field across the road and make a break for the kitchen.

Once when Mrs. Lindbergh was visiting us, I heard her say to my mother:

"I suppose the boys might get hurt flying. But they are careful and they want to do it so bad we will have to let them."

That part about being careful hurt my conscience a little that day. I had been up to my old tricks of chasing brakemen off the Wabash freight trains.

I would dive down and skip along the cars while the trainmen scuttled down the ladders. It takes about 2,000 hours in the air to get over being foolish.

WHEN our year of barnstorming was over, "Slim" joined the air mail, flying the St. Louis-Chicago run for the Robertsons. We had cleaned up between three and four thousand dollars, and had not had a single crack-up. The next year I went out again, working Indiana and Ohio.

Later on, I sold the J-1 Standard we had used to an old fellow who was going to teach himself to fly. He took it up about fifty feet, slid off on one wing, and came down with a bump. He wasn't even scratched, but he was mad as a hornet. He took off his helmet and goggles, threw them on the ground, and jumped up and down on them. Then he walked off and left the plane where it fell. That broke me all up. I didn't own the ship any more. But I hated to see her go that way.



# Where the World's Fastest

UNUSUAL features in the design of the German steamship *Bremen*, new speed queen of the Atlantic, are depicted on these pages. They show why she was able to race into New York harbor, the other day, with a record-smashing mark of four days, seventeen hours, forty-two minutes from the French port of Cherbourg, and then, on her return trip, to lower the record between New York and Plymouth, England, to four days, fourteen hours, and thirty minutes.


On her westbound run the *Bremen* eclipsed by eight minutes less than nine hours the record of the *Mauretania*, which had held the speed laurels of the sea for twenty-two years. The *Bremen's* average speed was 28.2 knots—about thirty-two land miles an hour. In the eastbound crossing that followed she maintained an average of 27.9 knots.

Fastest, most powerful, third longest and fourth largest merchant vessel in the world, the ten-deck *Bremen* is said to have cost \$20,000,000 to build. She is a four-screw, 50,000-ton oil burner with geared steam turbines, and can accommodate 2,200 passengers. Only the *Majestic* and the *Leviathan* surpass her length of 888 feet from stem to rudderpost, as vessels are measured for comparison.

Shipbuilding, as represented in the four-day *Bremen*, has made tremendous advances since the little *Savannah*, first ship to cross the Atlantic with the aid of steam, in 1819 sailed and steamed from Savannah, Ga., to Liverpool, England, in twenty-nine days. The German liner is a new departure in shipbuilding, even from the most modern of present-day vessels.


All exposed portions of the *Bremen*—even the funnels—are streamlined to increase speed. Upper inset shows new safety mechanism for launching lifeboats. An electric directory that aids passengers to find their way about the ship appears in lower inset.

Drawn for POPULAR SCIENCE MONTHLY by  
B. G. Seielstad.

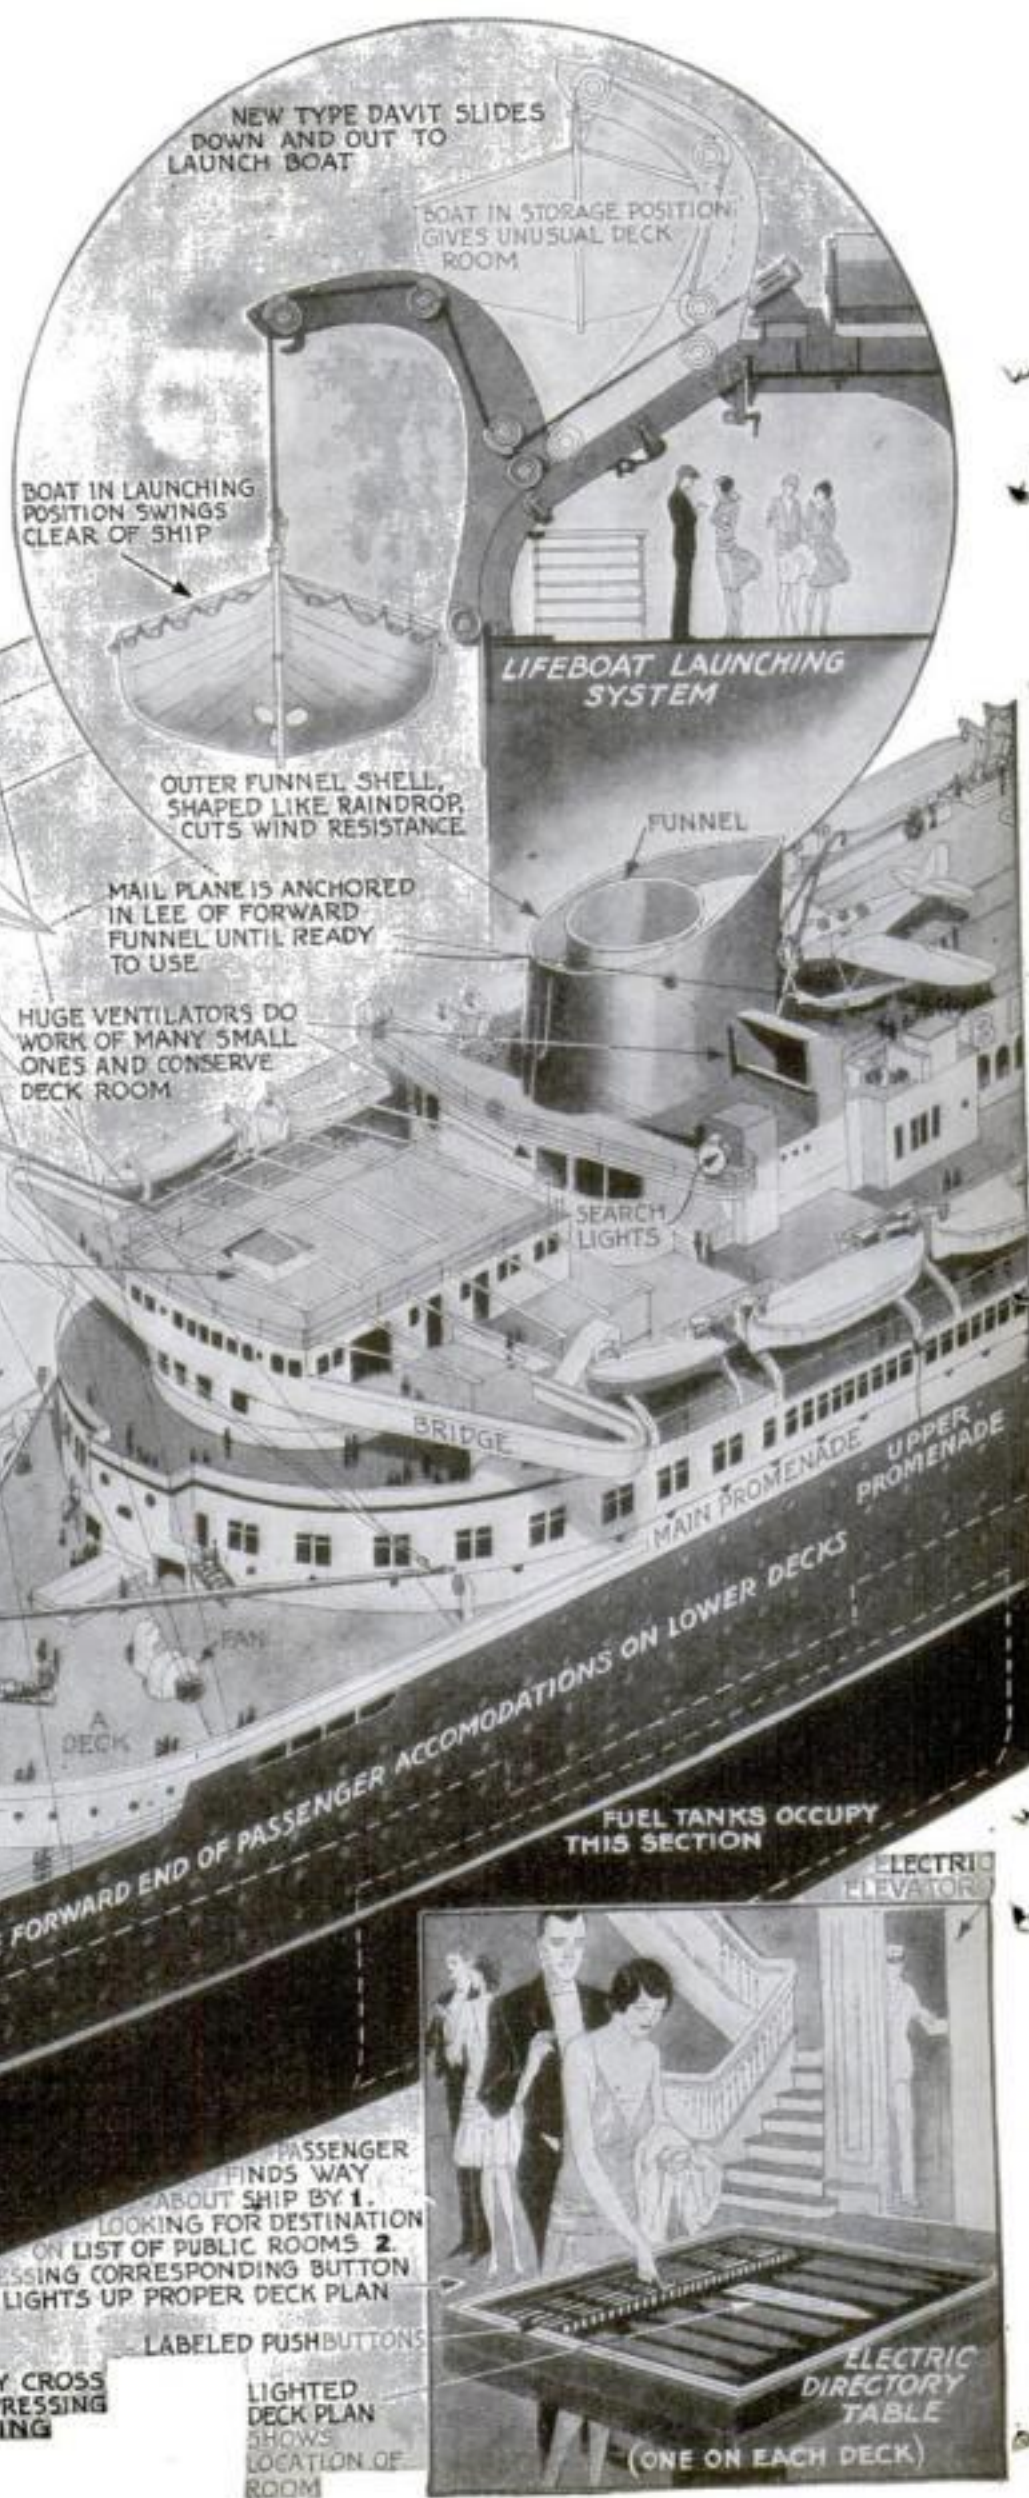



# Ocean Liner Gets Its Speed

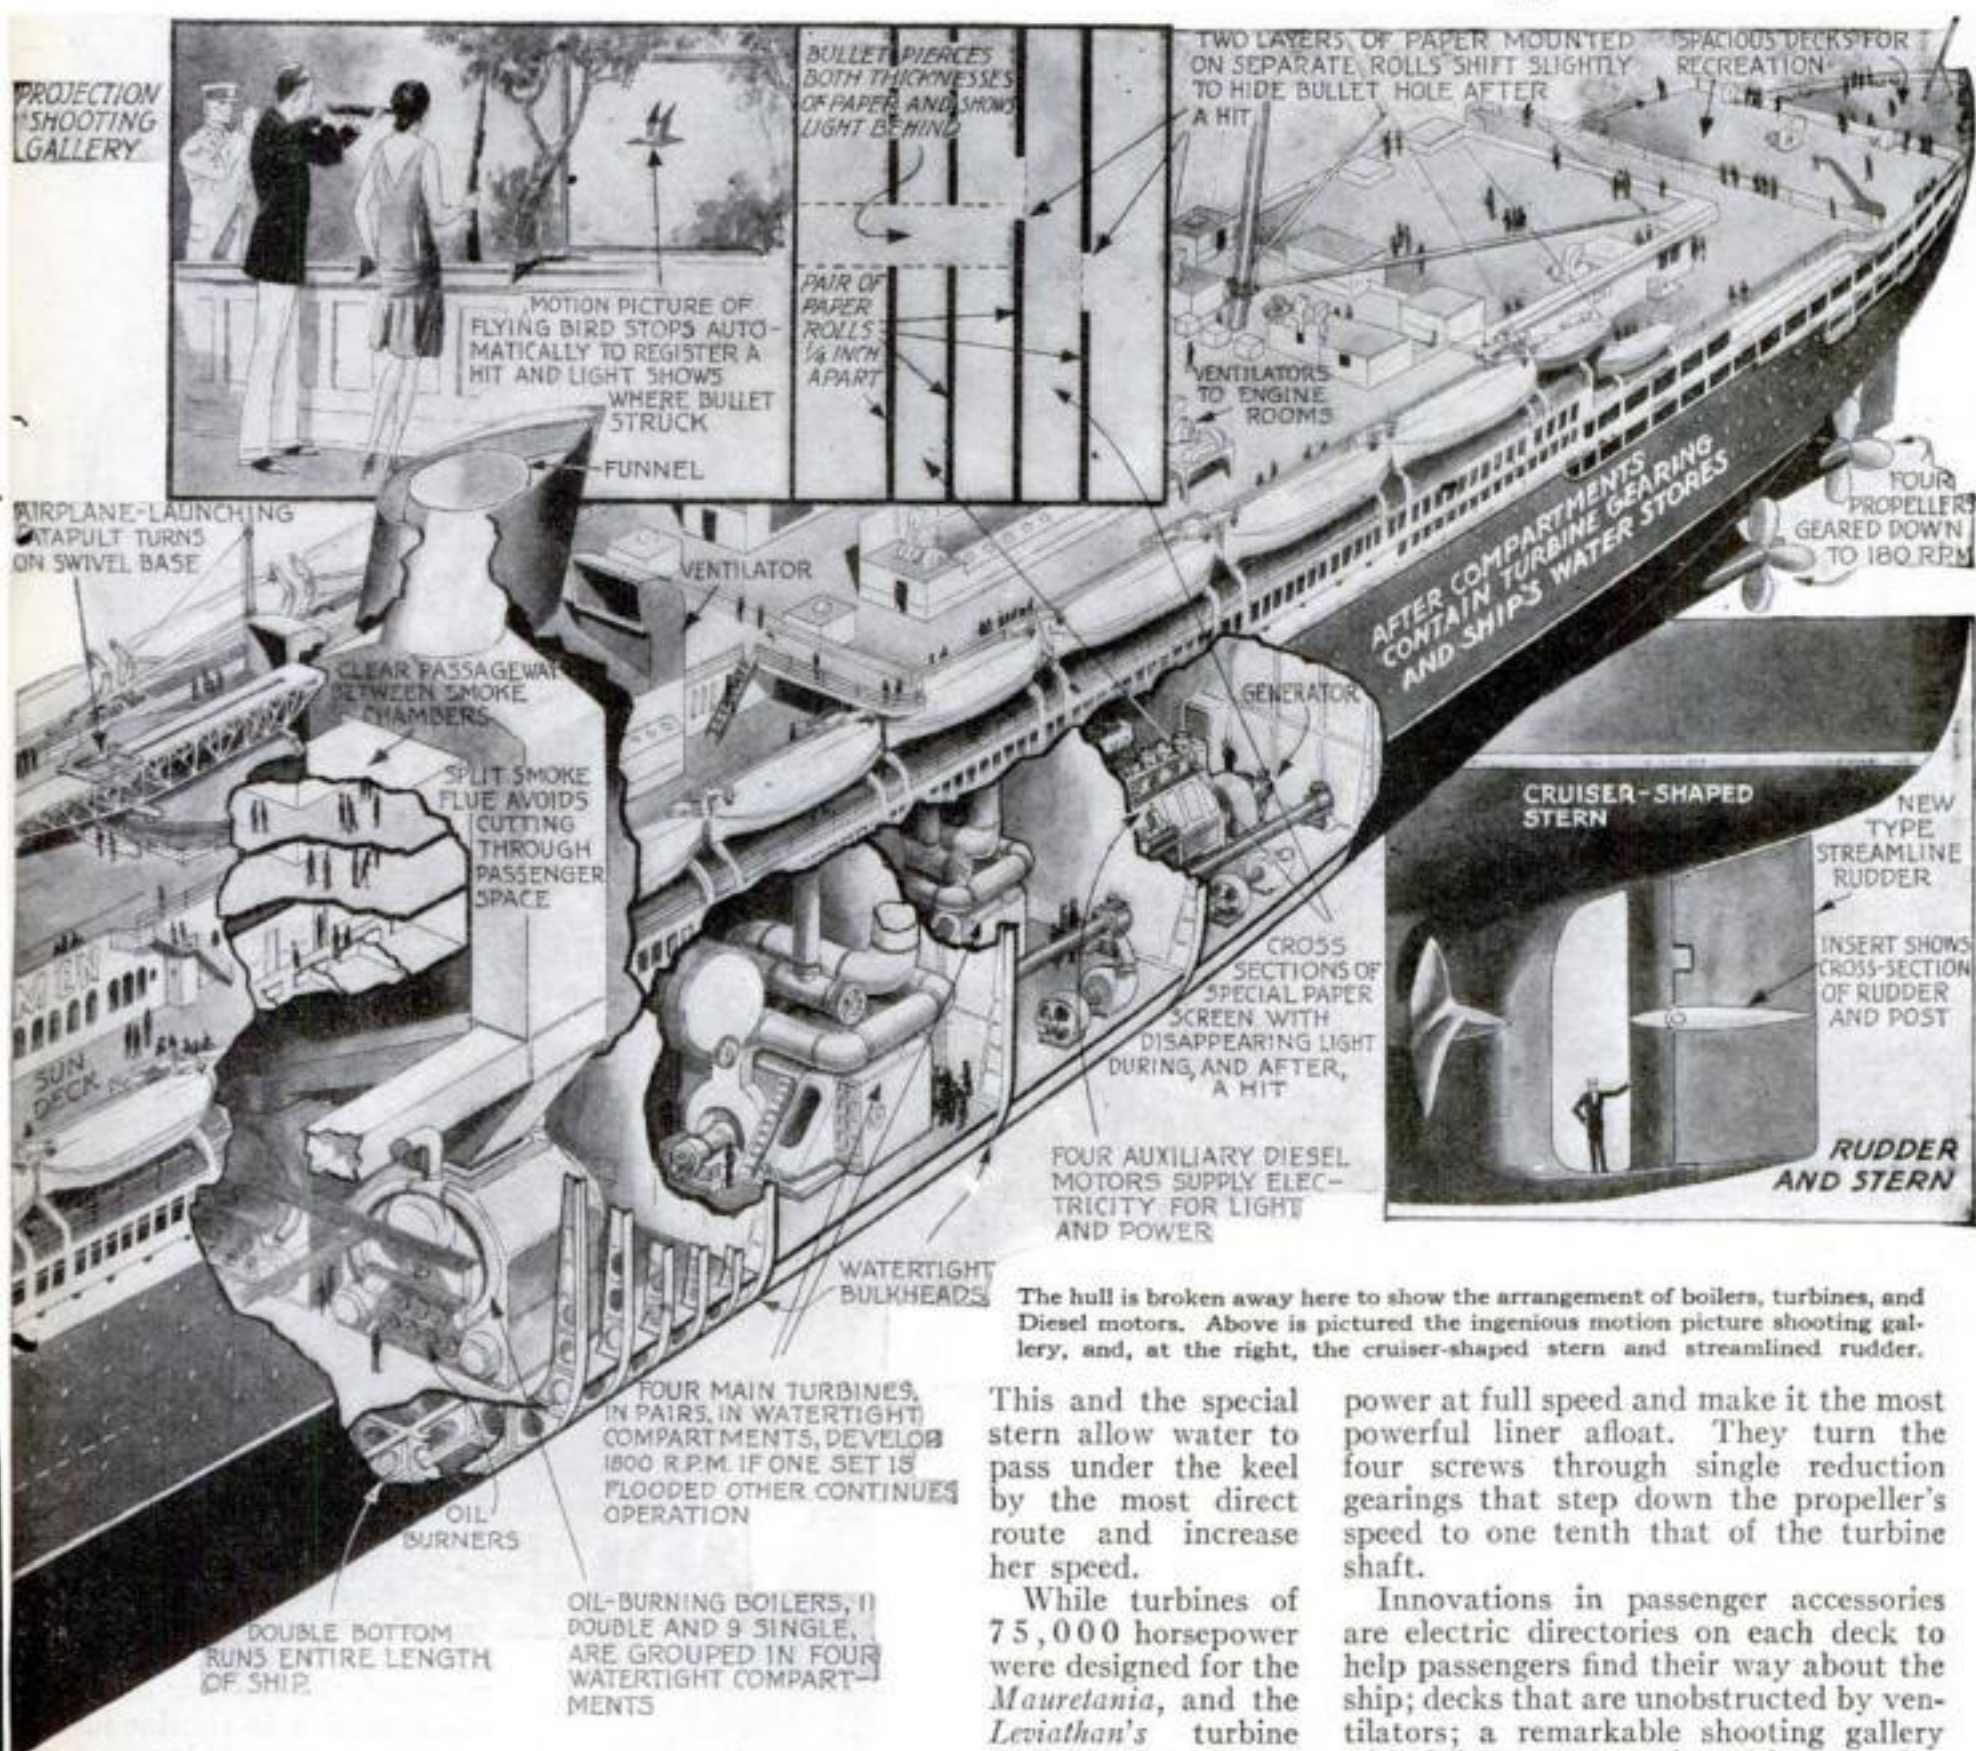

The hull is broken away here to show the arrangement of boilers, turbines, and Diesel motors. Above is pictured the ingenious motion picture shooting gallery, and, at the right, the cruiser-shaped stern and streamlined rudder.

This and the special stern allow water to pass under the keel by the most direct route and increase her speed.

While turbines of 75,000 horsepower were designed for the *Mauretania*, and the *Leviathan's* turbine machinery can attain


100,000 horsepower, the four smaller high-speed turbines that drive the *Bremen* develop a total of 130,000 horse-

power at full speed and make it the most powerful liner afloat. They turn the four screws through single reduction gearings that step down the propeller's speed to one tenth that of the turbine shaft.

Innovations in passenger accessories are electric directories on each deck to help passengers find their way about the ship; decks that are unobstructed by ventilators; a remarkable shooting gallery with flying targets projected by a motion picture lantern; magnetic clocks in the staterooms, regulated from the navigating bridge; and a new type of steel davit that keeps the motorized, radio-equipped lifeboats out of passenger's way on the sun deck, ready to be launched instantly merely by pressing a button. A compressed-air catapult launches a mail plane from the top deck when the ship is near port.

Every modern safety device is present. Fourteen water-tight bulkheads make the *Bremen* practically unsinkable and the boilers and turbines are in two groups.

**A** BULBOUS bow that presses water down instead of to the side, a new style of streamlined rudder, and a cruiser stern lifted from the sea by the propellers helped the *Bremen* to earn the title of the fastest liner. Streamlined throughout, even to the funnels, the *Bremen's* curious shape, bulging in front and tapering behind, is designed to offer the least resistance to water and air. The shape assumed by a falling raindrop is applied to the funnels and, under water, in blisters—one on each side—which give the vessel her pear-shaped bow.

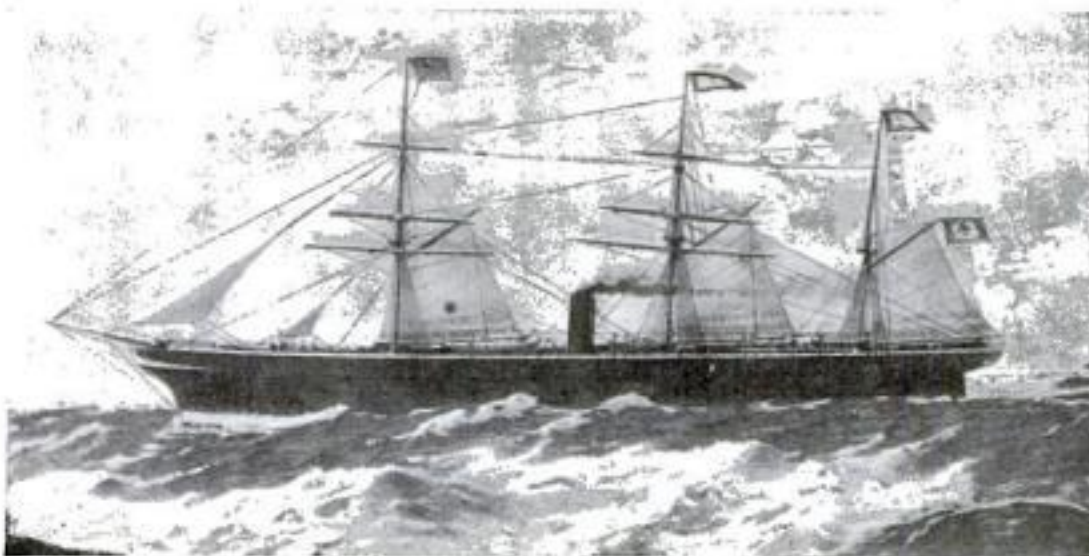

Seventy years of shipbuilding progress have evolved the luxurious new *Bremen* from this ancestor of steam and sail. This old-time *S. S. Bremen* was built for the same line in 1857.



# Aims Rocket at Roof of Sky

## Goddard Tests New Missile to Explore the Upper Air for Science

By ALDEN P. ARMAGNAC

A SMALL group of experimenters carried a heavy cylinder of steel to the outskirts of Worcester, Mass., the other day. They set it on end at the base of a steel tower forty feet high at the center of a vacant field. Its shape revealed it to be a rocket—but such a rocket as a small boy might dream of the night before the Fourth of July. It was nine feet high, and twenty-eight inches in diameter.

The experimenters fitted the rocket on rails that ran up the sides of the tower, then retired to the safety of a small wooden shack a few yards away. One of them closed an electric switch. A spurt of flame shot from the rocket as it soared skyward.

First reports from the astonished city of Worcester said that a huge meteor had exploded. Witnesses informed the Worcester police station that an airplane in flames had shot across the sky and blown up. Two police ambulances dashed through the streets looking for the supposed victims, while an airplane took off to aid in the search.

The cause of all the excitement proved to be a test, by Professor R. H. Goddard, head of the physics department of Clark University, of a sky projectile that he invented to explore the upper air. A liquid propellant never before used in any rocket drove the latest model, which is the climax of experiments costing \$12,000. With the new explosive Professor Goddard expects to shoot a rocket to heights never before attained. If one could reach a height of 200 miles above the earth it might obtain data of great value to science. Even a twenty-mile rocket would be an invaluable aid in answering the mystery of what is at the top of the sky.

Professor Goddard would equip high-altitude rockets to bring back four kinds of records—samples of the upper air for chemical analysis, measurements of temperatures and pressures in outer space,



Prof. R. H. Goddard demonstrating the electric detonator with which he fired his rocket.

photographs of the sun's light far above the atmosphere, where the ultra-violet or "health" light is supposed to be much more intense than at the earth's surface; and observations of high-altitude weather conditions for aviation.

To bring back air samples, such a rocket might be fitted with a chamber timed automatically to open at a certain height, trap a small sample of air, and close again for the descent. It could carry also the standard instruments now used on small sounding balloons, which are sent up by the Weather Bureau to measure temperature and pressure and which never reach more than fifteen or twenty-mile altitudes. A "sun camera," combining a camera and a spectroscope, would be used to analyze the sun's light.

When Professor Goddard's new nine-foot rocket soared over Worcester, he himself was eagerly observing its flight. The last of its explosive used up, it turned earthward. A parachute

Working model of the Goddard rocket to explore high altitudes.

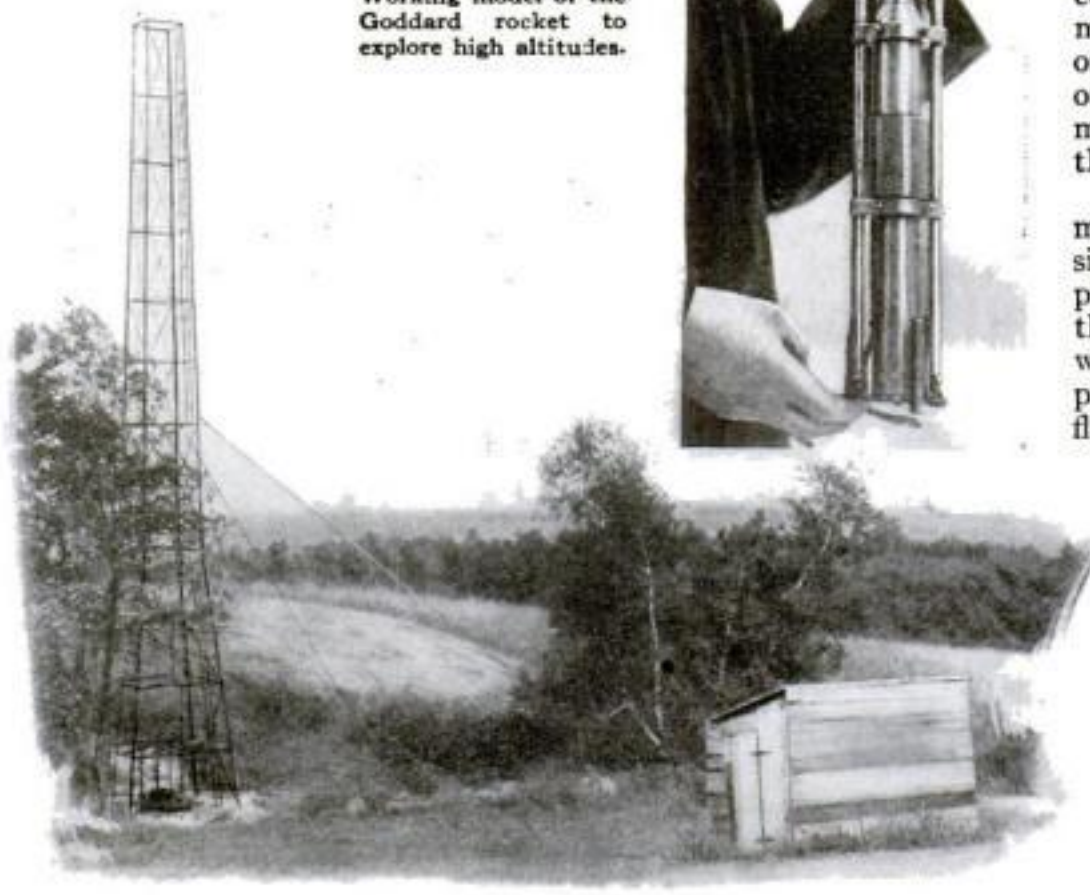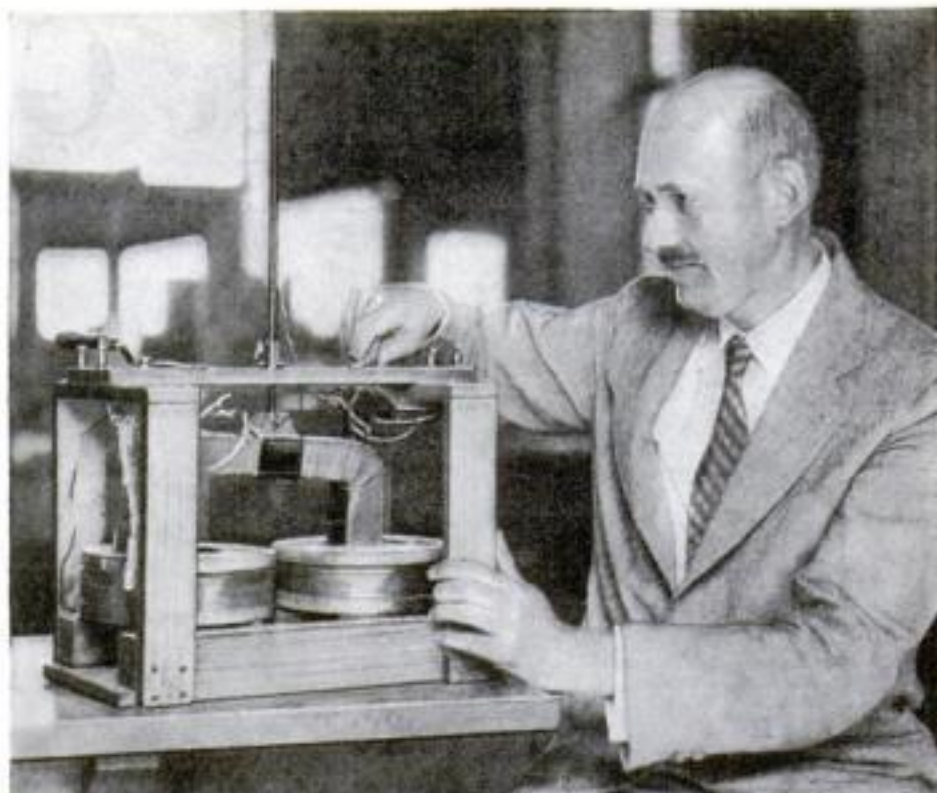

From this forty-foot steel tower on a farm near Worcester, Mass., Professor Goddard shot his new rocket. At the right is the shack where the rocket was fired electrically.

opened and gently lowered to the ground the empty steel shell. Professor Goddard recovered this and found still intact a camera and a barometer that had been sent aloft.

"The height, though not great," Professor Goddard told POPULAR SCIENCE MONTHLY, "was sufficient to demonstrate clearly the satisfactory operation of the rocket. Such a device is capable of exploring the high atmosphere and even the regions beyond."

AS LONG ago as 1916 Professor Goddard proposed his scheme to reach great altitudes. He enlisted the aid of the Smithsonian Institution in his research, which was also watched with interest by

the American Association for the Advancement of Science and by the United States Government. In the years of work that followed he destroyed several unsatisfactory models before he arrived at a practical device. The first Goddard rocket, patented during the war, contained multiple charges to be fired one after another. After laboratory tests this design was modified. In the new design the explosion is continuous.

In the course of his experiments there have been persistent reports that Goddard planned to shoot a rocket to the moon, where its arrival was to be marked by the explosion of a heavy charge of flashlight powder visible through powerful telescopes. Professor Goddard never has denied that his invention might prove adaptable to such a venture, but his present plans are much more practicable. It is said, however, that, with a sufficient charge of explosive, one of his projectiles might even escape from the earth's restraining gravity and become a man-made meteor in outer space.



# \$200 Midget Car Parks in a Box

*New Toy-Sized Auto  
with 60-Mile Speed  
May Be Sold by Mail*



The baby car weighs only 600 pounds. If the driver runs out of gas, he can push it to the nearest filling station. Right: A close-up showing the adequate room in the driver's seat.

**A** TWO-PASSENGER automobile, only five feet between wheels, and so light that a man of average strength can lift the wheels from the ground, is the latest arrival in motor-dom. At this writing three of the motor dwarfs have been built, and the car is expected to appear on the market within six months. Its proposed selling price, based on a production of 2,000 cars a day, is \$200. It is said to cost only two cents a mile to run and garage cost is nil, since it is planned to deliver the car in a weather-proof packing case with hinged doors that houses it permanently.

The extraordinary midget can be parked in half the space required by an ordinary car. It turns completely around without crossing the center line of the average road. Being a foot less in width than the standard automobile, it can sneak in and out of traffic jams. On the open road a speed of more than sixty miles an hour is claimed for it.

The new car is a midget even by comparison with the small cars that are common in Europe. Its sixty-inch wheelbase is the shortest ever. The smallest American car now in production has a wheelbase of 103½ inches. The new car weighs only 600 pounds, and is said to run fifty miles on a gallon of gasoline.

Radical departures from con-


ventional design make the toy-sized car so light that it may be rolled about with one hand. It has neither chassis nor springs. There are no axles, in the usual sense of



How a coil of "aviator cord" acts as springs.



Hood with dummy radiator lifted to reveal four-cylinder air-cooled motor.

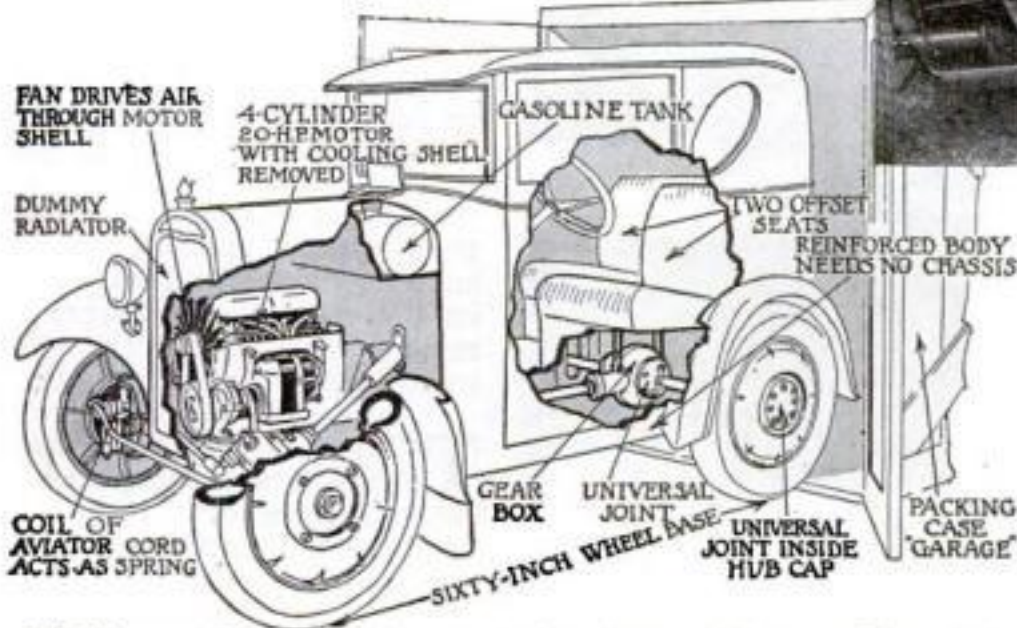

FAN DRIVES AIR THROUGH MOTOR SHELL

4-CYLINDER 20-HP MOTOR WITH COOLING SHELL REMOVED

GASOLINE TANK

DUMMY RADIATOR

TWO OFFSET SEATS REINFORCED BODY NEEDS NO CHASSIS

COIL OF AVIATOR CORD ACTS AS SPRING

GEAR BOX

UNIVERSAL JOINT

UNIVERSAL JOINT INSIDE HUB CAP

SIXTY-INCH WHEEL BASE

PACKING CASE "GARAGE"



A close-up view of "aviator cord," a cable consisting of dozens of rubber bands.

the word. Each wheel is independently attached to the underside of the body. The car has just half the usual number of parts for a conventional automobile.

The inventor is James V. Martin, an airplane manufacturer of Garden City, N. Y. His knowledge of plane construction helped to dispense with heavy springs which are standard on other cars. Instead of springs, each wheel is supported by a coil of "aviator cord," which absorbs shocks in airplane wheels. With a core of rubber strands and a protecting web of fabric, this cord is designed to last for 25,000 miles of driving, after which it may be replaced inexpensively.

**P**OWER reaches the rear wheels through a diminutive differential gearbox attached rigidly to the body. Light shafts drive the rear wheels through fabric universal joints. These enable the wheels to roll comfortably over inequalities in the road. The front wheels swing wide for easy steering. The shaft through which they support the front of the car does not bounce up and down with the wheels, as it would if springs were used. This minimizes "unsprung weight," that tire-punishing load that is not supported on springs.

Despite its small size, the four-cylinder, air-cooled motor that drives the car is said to develop twenty horsepower. Its unique cooling system consists of a jacket completely enclosing the motor, and through which a fan forces a blast of cooling air. The "radiator," which is simply an ornamental dummy since no water is used for cooling, lifts up with hood to give access to motor.

Gear shift and other controls are standard. An electric starter now used may be replaced in future models by a "kick" starter like a motorcycle's that can be operated from the driver's seat.

Besides the two-passenger closed model, the inventor has completed designs for a four-passenger pleasure car and a half-ton commercial truck of the same short wheelbase, the latter to weigh only 700 pounds. A large mail-order house is reported to be considering selling the new models by mail.

This diagram of the car is broken away to show its unusual features. The motor is housed in an odd-shaped ventilator, through which a fan forces a blast of cool air.





Fulfilling Count Zeppelin's dream of trans-ocean airships—a Mid-Atlantic sunset view from pilot house of the *Graf Zeppelin*, America-bound.

# The Zeppelin Grows Up

From a Cranky, Motorized Balloon to Gigantic Ocean Airliners—The Story of Count Zeppelin and His Long Struggle to Perfect the Dirigible

By WALTER E. BURTON

**T**WO airships of size greater than any ever built are soon to go under construction at Akron, O., for the United States Navy. Two other American ships of the same 6,500,000 cubic feet gas capacity, are being designed for commercial service over the Pacific between California and Hawaii, while a project is reported under way for a regular transatlantic dirigible service. Each of the two new commercial ships will accommodate eighty passengers; and, as in the Navy ships, will inclose passenger compartments and motors within the hull—a novel departure in design made possible by the use of non-inflammable helium gas for lifting.

Other innovations distinguish the new English air leviathans *R-100* and *R-101*, one of which uses girders of stainless steel instead of the hard aluminum alloy, duralumin.

These new airships, and the flying exploits of the *Graf Zeppelin*, which at this writing was attempting the first airship voyage around the world, form the latest chapter in the story of the rigid airship's development—the story of the Zeppelins and of Count Zeppelin, their builder.

On a July evening in 1900—three years before the airplane had been invented—a 420-foot airship shaped like a huge lead pencil was towed by a group of men out of its floating hangar on Lake

Constance, on the German-Swiss border. At the ends of restraining ropes it ascended to a height of seventy-five feet. Then the ropes were cut and two sixteen-horsepower motors on the airship started.

This ship, the *LZ-1* (LZ is an abbreviation of *Luftschiff Zeppelin*—German for Zeppelin Airship) was the first Zeppelin. First it nosed down a little. Then the propellers took hold and it sailed gracefully upward. A few moments later it began to behave strangely. First it would advance a few hundred feet. Then, for no apparent reason, it would reverse and back up an equal distance. Failure of a sliding weight that balanced the craft had put the steering apparatus out of commission. But those on the ground did not know it. Aboard the cranky craft its inventor, Count Zeppelin, managed to land it safely with its four other passengers.

**T**HUS was fulfilled, if in somewhat erratic fashion, the inventor's dream of many years. The adventurous Count Ferdinand von Zeppelin, born in 1838 on the German shores of Lake Constance, long had held the vision of great airships for com-



The *Graf Zeppelin* just before starting her round-the-world cruise, moored alongside the *Los Angeles* (in foreground) in the Navy hangar at Lakehurst, N. J. Both are products of Count Zeppelin's genius.



mercial and military operations. It was in America that his idea took definite form.

After graduation from a military school at Ludwigsburg, he had become a lieutenant in the Württemberg army. But the quiet life of a peace-time garrison did not appeal to him. At that time the Civil War in America beckoned to adventurous spirits the world over, and Zeppelin found it an excuse to "add to his military education." He came to the United States and joined the Union Army as a volunteer officer. By chance he was assigned to a balloon corps. At St. Paul, Minn., he made his first balloon ascension, followed by many more in the weeks that ensued.

**T**HEN the idea came to him that a power-driven balloon capable of being steered would be a valuable invention—an impression heightened by his hunting parties with other officers, in their free time, through sparsely inhabited regions of the Mississippi Valley. A dirigible—"steerable"—balloon, he became convinced, would prove a boon for reaching inaccessible, unexplored places of the earth.

It was a long time, however, before his

With no experimental data, nothing but his own imagination to draw upon, Zeppelin perfected his plans. He foresaw that an airship, to carry freight and passengers to distant ports, must be a huge craft. In such a ship it would be foolish to trust the valuable lifting gas to a single compartment. So Zeppelin worked out the multiple-cell principle. He put the gas in a number of separate compartments. One or more could be destroyed, and the gas lost, without causing the ship to fall. Moreover, cross-partitions that separated the gas chambers would keep gas from surging from one end of the ship to the other and would improve her stability. Another revolutionary idea was the introduction of a rigid framework of light metal girders, covered with cloth.

To develop these plans Zeppelin, by that time an army general, resigned his military post. He enlisted the aid of an engineer named Kober and added the finishing touches to the main principles he had already laid down. In 1894 Zeppelin submitted the plans to a special committee of leading German scientists. The group failed to recommend the building of the airship—though it could find no flaw in the specifications.

Now a man passing middle age, fighting to make his invention come true, Count Zeppelin at sixty succeeded in obtaining support to build his first ship. And then an unforeseen event almost



The late Count Ferdinand von Zeppelin, creator of dirigibles. During America's Civil War he served as a balloon corps officer in the Union Army.

ruined his plans. Another group of experimenters had built, near Berlin, a rigid airship about 150 feet long, of essentially different design, and covered with metal. Unlike all previous "rigid" airships it succeeded in getting off the ground. But on its first trial flight it made a forced landing and was completely wrecked. The framework was too weak. Only after great difficulty did Zeppelin convince his supporters that this was not a fault inherent with all rigid airships.

**T**O HOUSE his first creation, Zeppelin built, on the shores of Lake Constance, a structure unlike any other in the world—a shed that floated on the water. It was a huge building even by modern standards, 450 feet long, with eleven windows at each side to admit light to the great single room where the Zeppelin was to be built. It floated on ninety-five pontoons, some of which supported an ingenious detachable floor. This floor when unhitched from the rest of the hangar and floated out in the lake, was to serve as a launching platform for the dirigible. The shed was anchored at one end so that it could swing in the wind, keeping the mouth always on the leeward side to facilitate handling the airship. After this structure was built, it narrowly missed disaster several times, when heavy winds tore it from its moorings and threatened to dash it on the shore. From naval dockyards at Kiel, Zeppelin obtained a number of huge ship's anchors, and at last he was ready to build his airship.


Under direction of Zeppelin's builder, Herr Kaubler, seventy carpenters and



A mechanic of the Graf Zeppelin climbing out of a motor gondola to repair a damaged oil tank.

half-formed ideas took definite shape. Meanwhile he served in the Franco-Prussian war, saw balloons carry messages from besieged Paris, and perfected his own plans for a self-propelled balloon. By 1873 he had completed a design, on paper, for a dirigible—a design that, with later improvements, was the basis of the LZ-1, the world's first successful rigid airship.

**P**ERHAPS no single machine of modern science has demanded of an inventor more optimism and faith than the rigid airship. In a branch of engineering that requires some of the most intricate of all mathematical calculations, Count von Zeppelin had no precedent to go by. The wonder is that he produced a ship that would fly at all. And it is not surprising that the King of Württemberg, to whom Zeppelin appealed for aid to build his first machine in 1887, failed to proffer assistance.

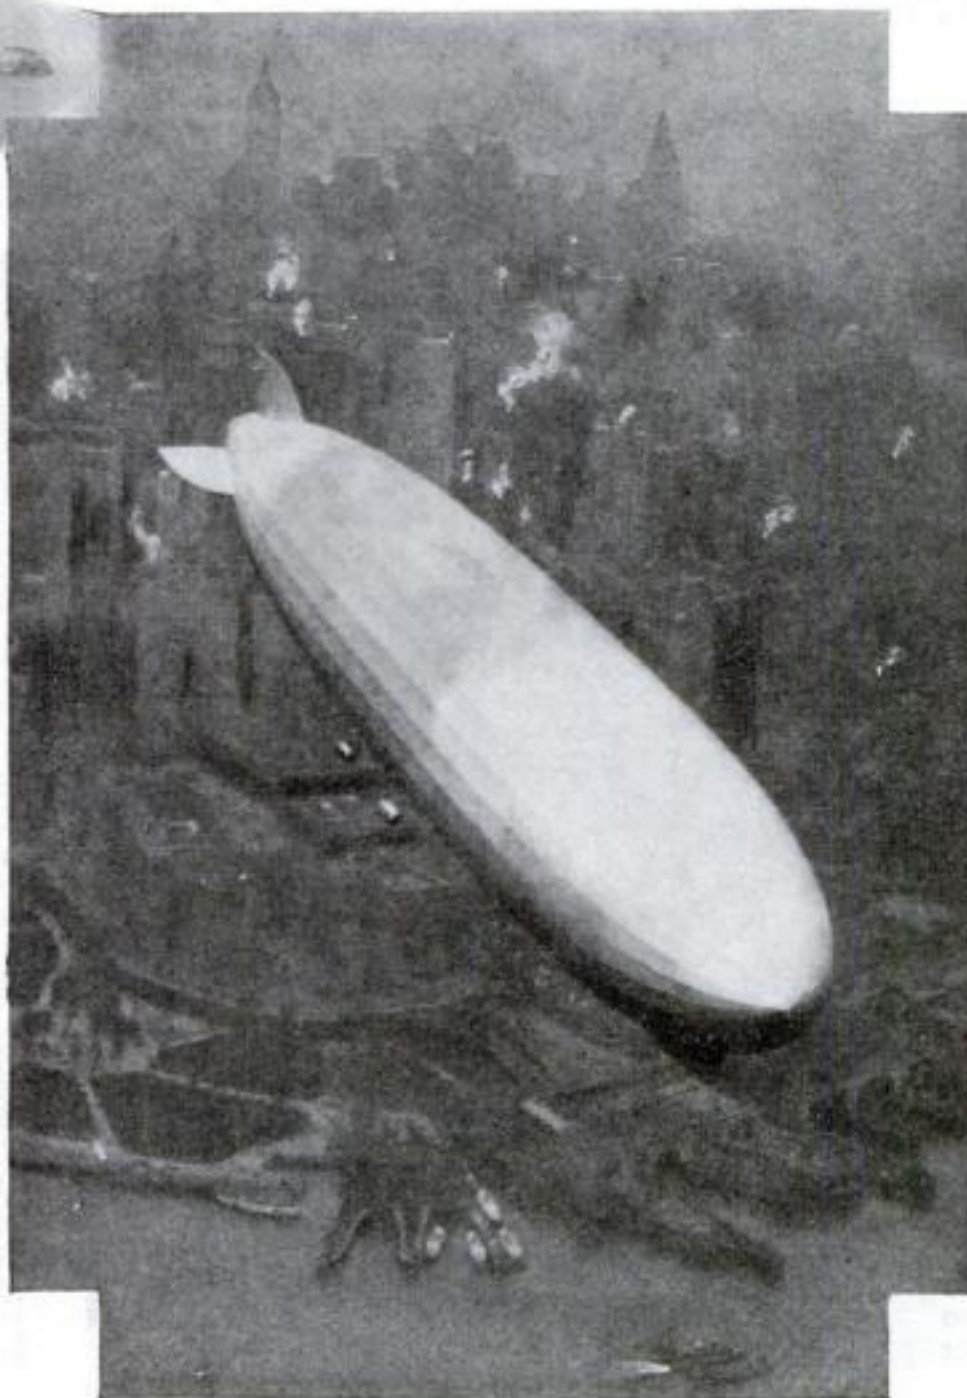

The Graf Zeppelin sailing over New York City's skyscrapers after arrival from Germany on her first trans atlantic flight. Photographed from an airplane.





An old photo showing Count Zeppelin ringing a ship's bell to signal his men during ground maneuvering of his LZ-4 in 1908. Note the odd construction of this early Zeppelin's car.

thirty mechanics fitted seventeen individual gas cells, holding in all about 388,000 cubic feet of hydrogen gas, into the 420-foot-long framework. Aluminum rods ran from one end to the other to form this framework, braced by many-sided "rings" set eight yards apart. Held rigid by innumerable cross wires, they looked like a row of great bicycle wheels. A light network of ramie, a vegetable fiber, covered the frame members. Between each pair of rings was placed one of the hydrogen gas bags of rubberized silk cloth, each capable of holding a gas supply for two or three weeks. Outside the aluminum framework, a skin of cotton cloth protected the valuable gas in the cells from sun and rain. Each filling of the ship cost about \$2,500 and took fully five hours.

Two tiny sixteen-horsepower motors—each less powerful than those which run the smallest American automobile today—drove the aluminum propellers of the big ship. Their diminutive five-foot gondolas fore and aft, connected by a catwalk, were swung far enough below the hull to minimize fire danger. Sufficient fuel could be carried for ten hours of flight. A novel feature, already mentioned, was the balancing apparatus—a 660-pound lead weight attached by a cable between the two cars and moved forward or backward by a windlass. Thus the ship's navigator could tilt the nose up or down.

**T**HIS was the ship that floated out on Lake Constance in 1900, before the eyes of aeronautical experts. Critics were outspoken in their doleful predictions of mishap. They declared the airship would bend with the weight of the gondolas under its ends. They feared the ship would keel over in mid-air because, they said, its center of gravity was too high. Some said the motors were too close to the hull and would cause an explosion.

But the first test flight, in which the ship flew at a speed of more



The LZ-2, Count Zeppelin's second airship, on its floating platform in 1906. It was 420 feet long.



One of the early Zeppelins rising from Lake Constance. Below it are the floating hangar in which it was built, and launching platform.

than thirteen miles an hour, proved these fears groundless. Later it made two short, successful flights, and was then dismantled because it cost too much to run. But it had proved that Zeppelin's dream was practical.

**I**N HIS early ventures, Zeppelin was handicapped by lack of reliable motors. In 1905 he built the LZ-2, with two eighty-five-horsepower engines. It made a forced landing in a field and a storm tore it to pieces before it could be repaired. Zeppelin built a third ship almost exactly like it, but with stabilizers added to the stern. It developed a speed of twenty-nine miles an hour. The German


Government became interested and commissioned him to build a larger ship, the ill-fated LZ-4, with 100-horsepower motors. Zeppelin flew it over the Swiss Alps to Lucerne and back again on July 1, 1908, attracting world attention. This triumph he proposed to follow with a trip down the Rhine Valley. But another storm caused another forced landing—and this time the ship was

torn from its moorings and sailed aloft with no one aboard. As it whirled skyward, something ignited the hydrogen. Instantly the bag was enveloped in flame. A few moments later Zeppelin was staring at the twisted skeleton of his latest efforts.

**M**ANY thought then that Count Zeppelin would never build another dirigible. But, aided by the financial support of the German people, he had reached the turn of his fortunes. In the years that followed, before the war, six of his dirigibles, put in commercial service, carried 37,200 passengers safely on 1,600 flights, covering 90,000 miles and remaining aloft a total of 3,200 hours.

At the outset of the war, the German Government commanded all


(Continued on page 162)

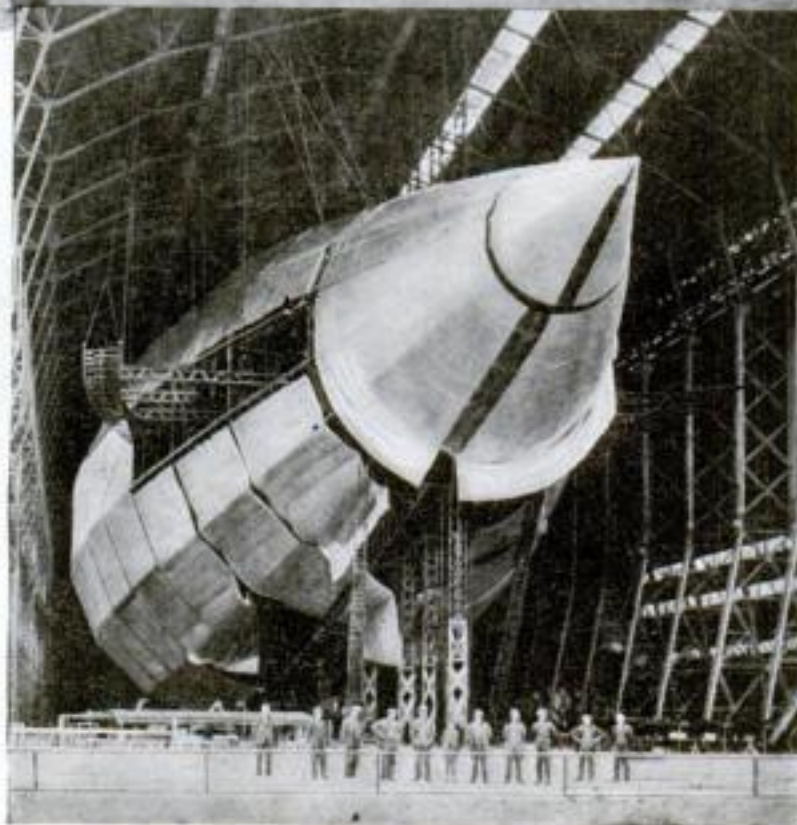

Rear of the huge new British dirigible R-100 in its hangar. Above: Crowds watching a flight of the LZ-4 in June, 1909.



# Plant "Pills" Grow Bumper Crops

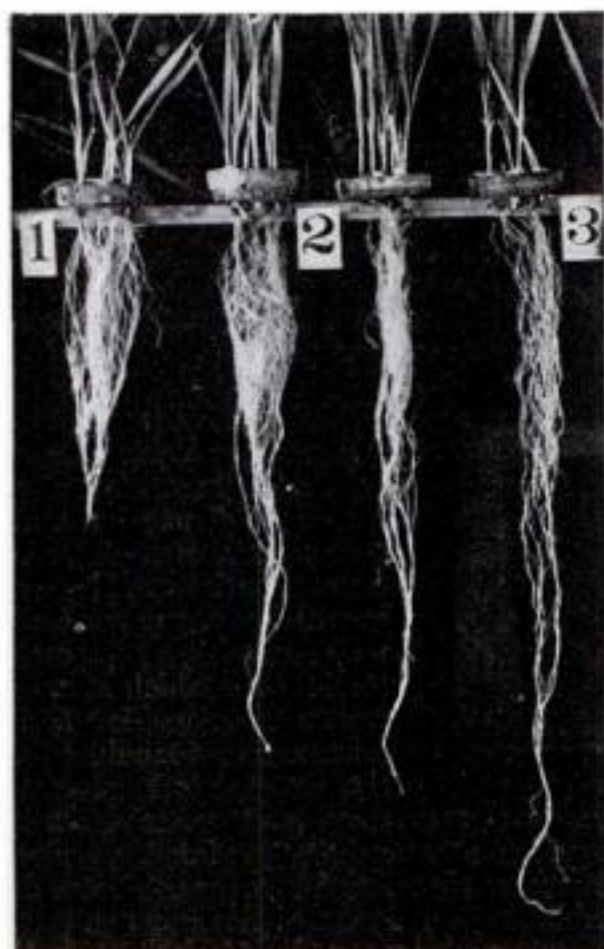

How root development, at the expense of the plant, is halted by the new method. (1) Narcissus grown in water with "pill"; (2) in water with commercial fertilizer; (3) in water only.

**E**MANCIPATION of farmers and growers of fruits and flowers from the vagaries of soil, season, and climate is promised by a discovery, of revolutionary importance in crop production, announced by the department of plant physiology of the University of California. Through the use of a chemical "plant pill," administered to plants grown in shallow tanks of water, cereal and vegetable crops now are made to thrive under desert conditions of heat, arid soil, and lack of humidity. Fruits and the fruitlike vegetables are brought to ripening ahead of normal time, and flowers of numerous varieties, usually blooming only in mid-summer, are provided for Christmas and New Year's.

Production of wheat, barley, rice, and cotton is increased from twenty-five to fifty percent. Beets, carrots, turnips, and other root crops are speeded to full development twenty to thirty days ahead of normal, their size augmented by sixty percent, without loss of tenderness. Tomatoes, grown by the new method alongside those cared for in the standard manner, show quantity increases of as high as forty percent, with larger and heavier fruits. Berries are made to ripen early, and the size and number of the fruits that they produce nearly doubled.

**N**OT since the death of Luther Burbank, the great plant wizard, has there been a discovery of such apparently revolutionary importance to the farmer and back-yard gardener as that which Mr. Dunn describes here. Fields of grain and vegetables flourishing on the desert; summer flowers blooming at Christmas; five-inch pansies and double-sized potatoes—these are a few of the marvels of a new scientific agriculture which replaces arid soil with shallow tanks of water fertilized by the introduction of life-giving chemicals.

By

H. H. DUNN

Full blown roses are produced in sixty-five to eighty days in normal house temperature in midwinter. Pansies four and five inches in diameter are common. Sweet peas five feet high and laden with blossoms are brought to bloom from the seed in sixty to seventy days, and in some instances much less. Dahlias are made to blossom in two months in standard home temperatures, with the mercury at freezing outside. Other common garden flowers are made to provide flowers in winter as readily as in the summer.

Fully five thousand experiments over a period of five years have resulted in this discovery, which Dr. W. F. Gericke, head of the department of plant physiology, calls "the greatest gift to agriculture since the science of fertilization of soils was worked out." In this opinion he is supported by the College of Agriculture at the University, and by scores of plant and soil experts, graduate students, and commercial florists, who have contributed to



Planted in October, these sweet peas grown by the plant pill process blossomed in December and January. Though raised out of their usual season, the vines grew more than five feet tall.

the experiments under Dr. Gericke's direction.

In brief, the secret of this new method of speeding plant development consists in administering combination doses of the seven elements of plant food, in the exact quantity and quality required by each different form of vegetable growth. These elements, combined in capsules, are introduced and dissolved in the soil or water where the plants are to grow. Bound together in a short tube, or cylinder, by means of a composition somewhat similar to plaster of Paris, the chemical combination contains nitrogen, phosphorous, magnesia, iron, potassium, and sulphur, the binding composition supplying the necessary calcium. In early experiments, an oval form of the "plant pill" was used, but later tests showed that the cylindrical form dissolves more equably and distributes its contents more evenly.



Twelve stalks of treated asparagus fill each of the standard cans at the center. The same sized cans shown at the left and right hold 24 to 36 stalks of untreated varieties.

**I**N the long series of experiments which led to the discovery, it was found that each variety of tree, cereal, vegetable, or flowering plant demands a different co-ordination of some or all of the seven elements mentioned above. Further investigations determined the exact composition best adapted to the development of each. The composition which would produce sturdy sweet pea vines and abundant blossoms, for



example, had no similar effect on roses, or on pansies. Experiments with young plants and cuttings, however, revealed that the chemical combinations could be cut down to about a score, each one being best adapted to a certain group of plants.

THE discovery then was applied to commercial flower growing, without profit, but merely to learn if flowers could be speeded up in such quantities as to make them commercially valuable. Roses, pansies, sweet peas, dahlias, and other flowers were so produced in quantities during December and January, 1928-29, by florists working under Dr. Gericke's direction. Cost of this midwinter production of summer flowers was no greater than production by ordinary methods in the warmer season.

Although the "plant pill" has been applied successfully in soil, the best medium of growth is water, about one quart to each plant. Rose cuttings, recently rooted and placed in water with the proper combination of fertilizing elements, doubled in size and presented quantities of full-blown flowers, of large size, in eighty-five to ninety days. Sweet peas grew from seed and blossomed in sixty days and less. Dahlias, from seed, developed tubers, plants, and blossoms, in ninety to one hundred and ten days.

Hundreds of other experiments, of far greater economic importance, were carried on with cereal and vegetable crops, and with fruit-bearing shrubs and trees. Remarkable success has been met with in the cereal and vegetable fields. The size of asparagus stalks was increased nearly 100 percent, without impairing tenderness or decreasing the number of stalks to the hill. Potatoes were increased in size by half, without enlarging the plant or altering the average number of tubers to the hill. Yield of tomato fields was increased by forty percent, with no addition to the size of the vines, or the area occupied by each.

THIS crop development was in soil. Further experiments, during the last summer, however, showed decisively that if the food plants were grown in water, instead of earth, the rate of growth was nearly doubled, the size of each vegetable increased, and many more of each vegetable could be grown on the same area. Experiments with wheat, cotton, tobacco, and cabbage showed the same result. Cotton was brought to bearing of full bolls in ninety days. Wheat grown in water with the plant pill made twice the growth of the same variety in water with the best commercial fertilizer, and more than fifty percent greater growth than when planted in soil with the plant-pill solution.

From these results, Dr. Gericke and his assistants, with the backing of the University of California, started experiments



Some of the largest potatoes ever produced, grown with the plant pill in otherwise unfertilized fields. Right: A cake of the pill material for use on a large scale.



with tank production of food crops, to determine costs of such production on a commercial scale. It was found that tanks six to eight inches deep were best adapted to the growing of all vegetables and cereals in the solution. At first tanks or trays about twenty feet long by five feet wide, made of wood and lined with tarred paper, were used. The paper was brought out and over to form a cover for the tank. In this top, small holes were punched close together. The seedlings were set out in these apertures, with their roots reaching the water in which had been suspended a number of the "pills."

In this manner it was learned that 150 to 200 percent more vegetables could be grown in a

Right: Three "household" sizes of the plant pill. From left to right they are for roses, sweet peas, and dahlias.



cover a five-acre field would cost \$1,000, or about three times the expenditure necessary to place that tract in good condition for vegetable growing each year.

BUT once the tankage has been constructed, it is a permanent improvement, with a life of about fifty years. No cultivation, irrigation, thinning, or weeding is necessary, beyond filling the tank with water and placing the new composition in it. With the rapid growth of vegetables and cereals, as demonstrated at the University of California, about twice as many crops can be grown as now. This speed of growth tends to shut out insect pests, as does also the separation of plants from soil, whence come

(Continued on page 150)



Left to right: Wheat growing in commercial fertilizer; in water; in water with plant pills, and in rich earth mixed with pill solution. Above: Roses in bloom after growing for two and one half months in tanks.



# The Bulldog of the Insect World

By E. BADE

**A** STRANGE "insect zoo" was established recently in England. The government experts in charge of it spend their time caring for armies of little six-legged soldiers—insects that prey upon other insects destructive to growing crops.

These fighters are being shipped to different parts of the Empire to aid the farmers.

In California, a similar experiment is going on. Dr. Stanley E. Flanders, of the University of California, is breeding billions of gnat-sized members of the wasp family which lay their eggs within the larger eggs of other insects, particularly those of harmful moths. The wasp larva, after it hatches, grows within the egg, destroying the moth that was to emerge. In answer to a rush order, not long ago, Dr. Flanders sent 100,000 of the microscopic wasp eggs across the continent by air mail. They made the journey in a small tin can.

Among the enemies of injurious farm pests is the most dauntless battler of the insect world, a steel-blue and orange bullet on wings called the digger wasp. It will attack other insects a dozen times its size, and even makes a fearless onslaught upon the tarantula, the great venomous spider of the Southwest, thereby earning the name of "tarantula hawk."

This inch-long wasp with threadlike waist and orange band is a real friend of man, for the chief objects of its attack are destructive caterpillars of the cutworm variety. J. J. Ward, the English entomologist, reports that in one section of Devonshire, he found thousands of digger wasp burrows without discovering a single caterpillar in them, indicating that the wasps, during the previous year, had almost exterminated the caterpillars.

**I**T IS near the mouth of these burrows that the wasp engages in its dramatic conflicts. The female digs the burrow and does the hunting. On a hot July day, she begins work. Nervous, transparent wings aquiver, she alights on a dry bank or roadside. Digging like a dog with her front legs, she grabs up little chunks of dirt between her mandibles, then jerks her head sidewise to toss the small pel-



A digger wasp in full flight—a terror to insects a dozen times its size. Note the threadlike waist and transparent wings.

lets out of the way. Sometimes, it requires a day to burrow three inches into the wellpacked earth and hollow out a chamber about an inch across at the bottom. When the work is done, the wasp searches for a stone just the size to plug the mouth of the hole. She may spend an hour bringing and discarding stones before finding one that fits. The tunnel plugged, the huntress seeks her prey.

At the sound of her approach the caterpillar struggles to resist the attack. It rolls and unrolls itself, throwing its body about frantically. But the wasp, swooping down like a hawk, straddles her victim, grasping it by the neck with her mandibles. Rearing high on her legs, she lifts the front end of the worm from the ground and with strange instinctive knowledge of anatomy, curves the end of her abdomen down, plunging a poisonous stinger between two segments near the central nerve cord. Instantly the caterpillar relaxes, paralyzed. The hypodermic needle of the stinger punctures half a dozen other places to insure that the victim will remain alive, though unable to move, for a week or more.

**B**EFORE dragging the caterpillar to the burrow, the wasp carefully turns it over on its back so that the legs will not offer added resistance in pulling it along the ground. At the entrance of the tunnel, she lays an egg on the side of the victim, before tugging it underground to form a living storehouse of food for the larvae. Later, a second caterpillar is added to increase the larder.

The mouth of the tunnel is then filled with dirt, which is pounded down by means of a stone hammer—a pebble held firmly between the mandibles. Sometimes, a bit of wood is used in place of a pebble, and once a wasp was seen hammering down the soil with the leg of a grasshopper.

Two or three days after the nest is sealed, the larva hatches out. It consumes the caterpillars and then spins a pale yellowish cocoon in which it rests until the following June, when it emerges as a wasp. Every fall, the parents are killed by the

(Continued on page 152)



Swooping down like a hawk, the wasp begins her attack on a terrified caterpillar.



Astride the victim, she grasps it with her mandibles and drives home the stinger.



Imprisoning the victim in her burrow, she tamps the soil with a pebble held in her jaws.



The thread-waisted digger wasp at rest. The insect measures about one inch in length.



Preparing to drag a paralyzed caterpillar into the burrow to replenish the family larder.



The wasp lays her egg on the side of the victim. The larva hatches to find a ready meal.





This medallion is the official insignia of the Golden Jubilee commemorating the invention of the incandescent lamp by Thomas A. Edison fifty years ago.

# Fifty Years of Flameless Light

*The World Pays Tribute to Thomas A. Edison on the Golden Anniversary of the Incandescent Lamp, Which He First Made to Glow with a Bit of Thread*

**G**OVERNMENTS and institutions throughout the world on October 21 will pay tribute to Thomas Alva Edison, the world's greatest inventor. That day marks the fiftieth anniversary of his invention of one of man's most important contributions to man—the practical incandescent electric lamp. In celebration of Light's Golden Jubilee, cities throughout the land will glow with colorful electrical displays. Impressive ceremonies have been prepared. A special postage stamp has been issued by the United States Government in honor of the genius who turned night into day.

It was just fifty years ago that the Wizard of Menlo Park, working in his tiny laboratory in New Jersey, took a bit of carbonized cotton thread, and introduced it into a globe where it glowed brightly for forty hours—a light without flame. This after many years of experimentation, during which he labored unceasingly toward the solution of a problem which many experts of the time considered so impracticable as to be classed almost with perpetual motion. That problem was the production of an electric lamp, economical and convenient enough to provide illumination in any home, shop, or office.

**A** FEW years before Edison began work on the subject, the carbon arc light had been introduced for street lighting. Edison's experiments early convinced him that this form of illumination would not be workable indoors. He saw that the only solution was an incandescent filament—one capable of high resistance to electric current, whose light might be turned on or off at will. At the outset he tried to carbonize paper for the filament between charged wires. The heat consumed it. Experiments with many other substances—even human hair—failed likewise. Meanwhile he was

busy developing a glass bulb in which the filament might be made to glow in a near vacuum. Night and day he and his assistants labored in the laboratory, until the glowing bit of cotton thread rewarded them at last.

**B**UT with that first electric lamp, Edison's quest for the perfect incandescent light was by no means ended. For many years he experimented with every procurable fiber in search of one that would resist intense heat. Chance, combined with the great powers of observation and concentration which are among his most notable characteristics, assisted him in finding the fiber he sought. While fanning himself one hot day he observed the tough strip of bamboo running around the edge of the fan. Within an hour he had cut the strip, carbonized it, and introduced it into lamps. The result was what he desired. It gave an excellent light and, what was more important, proved satisfactorily durable.

In an effort to find the best kind of bamboo for this purpose, Edison instituted a world-wide search for all varieties.

Edison's development of the incandescent electric light was accomplished in the face of many obstacles, not the least of which was ridicule from scientists and laymen. "It's the work of the devil!" said some cranks. Scientists laughed, affirming that such an application of electric current was doomed to failure.

But Edison never wavered. While others talked he worked. He met the opposition of arc light and gas companies by providing man with a better, safer, and more economical means of illumination. He went further. He overcame the mechanical difficulties which hindered the application of his new invention to a wider, more general scope. He invented a better dynamo than the world had ever before known. The central power plant

then became a possibility that was swiftly realized.

The distribution of power for private consumption followed closely on the heels of the electric bulb and the dynamo. This resulted in the revolutionizing of industry. It brought about a new conception of industrial operation. It made it possible for many large industrial units to be operated from a central point, instead of every plant having its own engines and boilers.

Electrified railroads, subways, and street railway lines, as they are today, were made possible by the genius of Edison. And two-thirds of the homes in America are indebted to him for the convenience and enjoyment they derive from electrical equipment.


**T**HE age of light is young. After fifty years we can only glimpse the possibilities of the future electrical age. Every year witnesses an appreciable increase in the total amount of energy generated. Last year the gross revenue from light and power totaled more than \$2,000,000,000. In 1929 more than \$700,000,000 of new capital will be spent for electrical expansion in the distributing field alone.

It is gratifying to the world to know that Edison is here to look over this span of fifty years and see with his own eyes the blessings that his genius has brought to mankind.

Light's Golden Jubilee will give mankind an opportunity to express its appreciation of Edison's gifts and to accord him a friendly tribute which will mean more now than bronze statues and marble slabs fifty years hence.

While Edison is still alive the youth of the world may catch a profoundly human inspiration. From him, who was so little appreciated in his youth, they may receive a practical lesson in success. He is a living inspiration—an example of what perseverance and industry can accomplish.



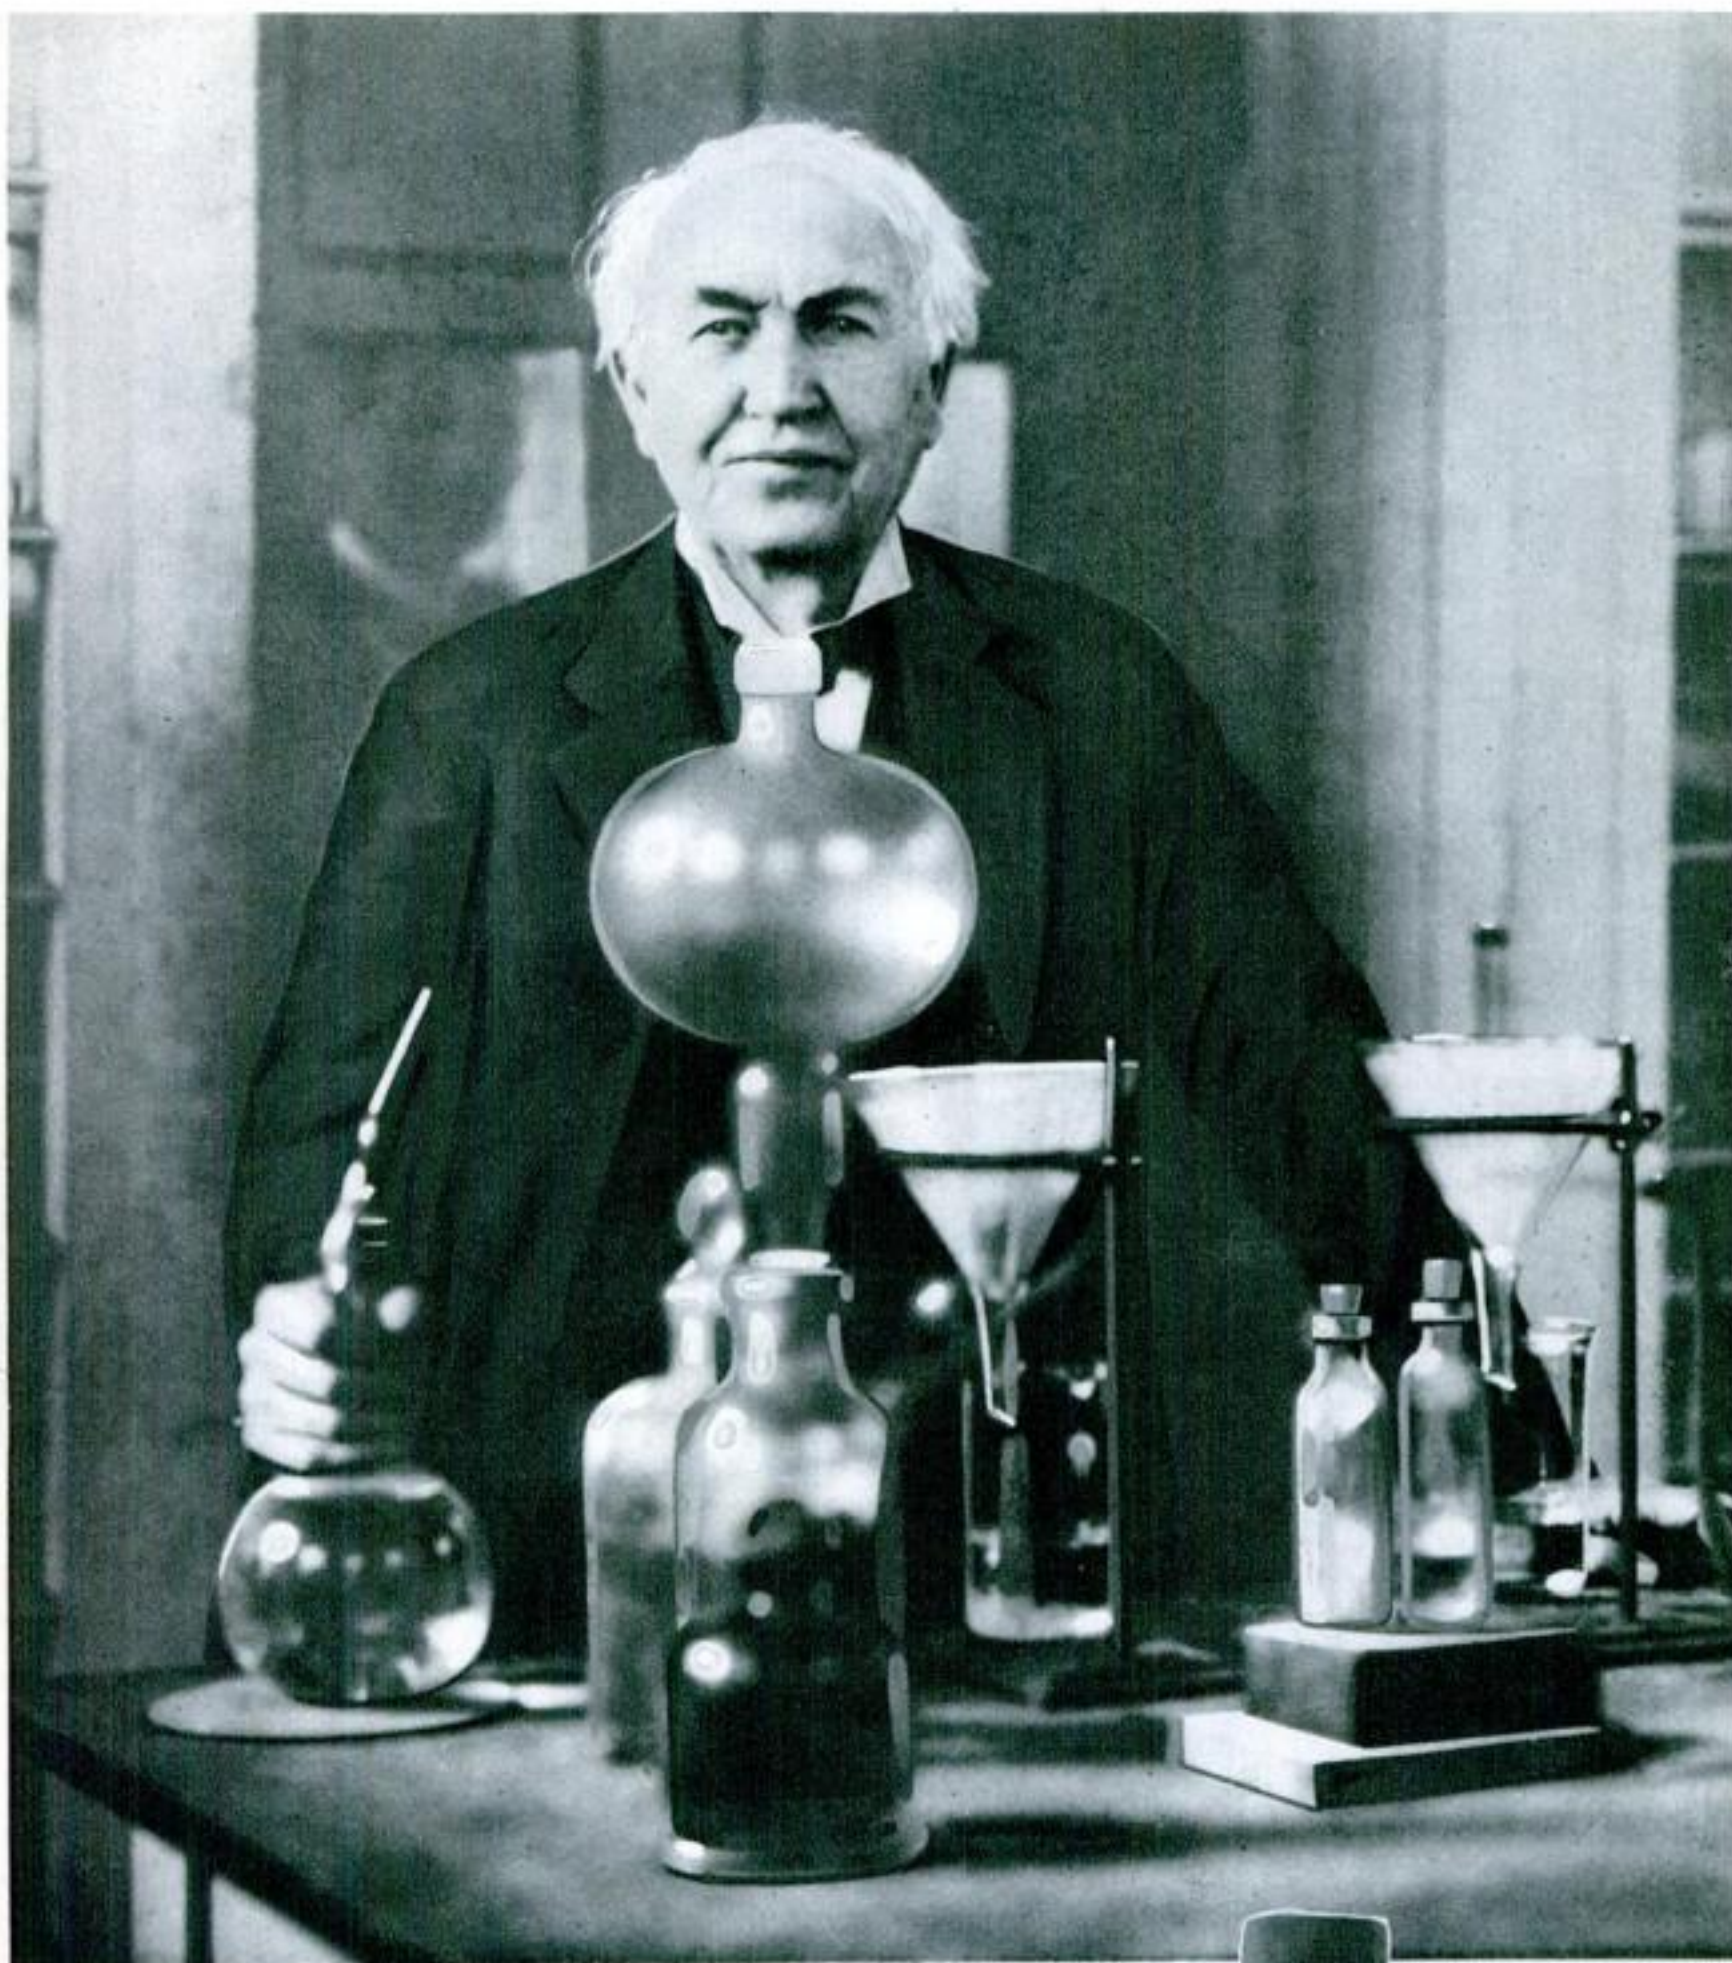

## Thomas A. Edison—His Life Story Told in Pictures

**T**HE picture at the right no doubt expresses better than any words the feelings of millions of Americans as the world celebrates the Golden Jubilee of electric light. What man would not like to shake the hand of Thomas A. Edison and to thank him in person for the scores of modern comforts and conveniences his inventions have made available everywhere?

The story of Edison always bears retelling. On the following pages the drama of his achievements is presented in pictures—a fresh reminder of America's debt to this "kindly servant."



William H. Meadowcroft, Edison's right-hand man for forty-eight years, offers his congratulations.






The little brick house at Milan, O., where Thomas A. Edison was born on February 11, 1847, and where he lived until he was seven years old. His parents then moved to Port Huron, Mich. In this house he had his first schooling from his mother.

Edison at the age of three and one-half years. Townsfolk of Milan called him "addled." But early he showed signs of genius in boyish experiments in chemistry.



This interesting contemporary print, reproduced from Frank Leslie's Almanac for 1879, shows Edison (standing at right with hand behind his back) enjoying the success of one of the first public exhibits of the phonograph, in his laboratory at Menlo Park, N. J. The machine became a public sensation.

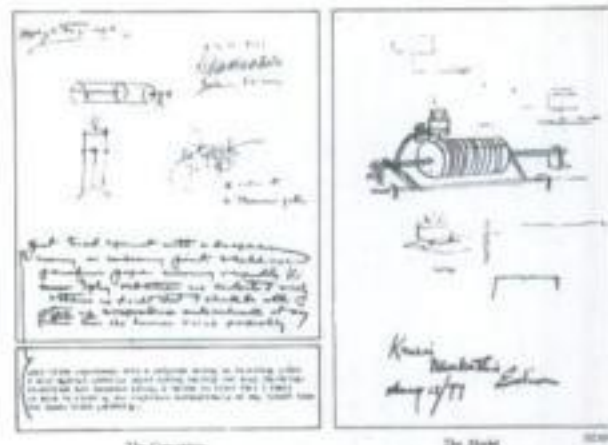


Edison's original drawings for the phonograph, invented in 1877. The note in his handwriting at left tells of preliminary experiments, and concludes—"There is no doubt that I shall be able to store up and reproduce automatically at any future time the human voice perfectly."



The beginning of the flameless lamp. A contemporary illustrator's picture of Edison experimenting with carbonized paper in a furnace, during his search for a fiber which could be carbonized and used for the high resistance filament necessary for his lamp.



At the age of thirty-two, creator of one of the world's greatest inventions. This portrait of Edison was made in 1879, at the time he invented the incandescent lamp. Already he had developed the phonograph besides many telegraph and telephone devices.

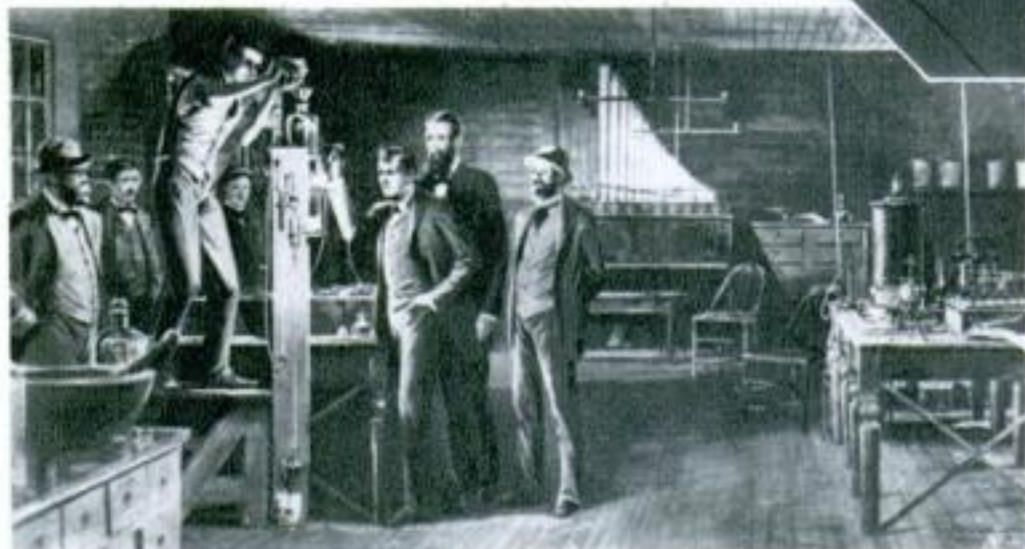

Another interesting print representing Edison and his assistants preparing one of his first incandescent lamps for its life test in the Menlo Park laboratory fifty years ago. The first successful lamp was lighted on October 21, 1879, and burned continuously for more than forty hours. Edison, standing with hand in pocket, is shown superintending the work of driving the traces of occluded gases from the carbonized cotton filament of his lamp with the current from an electric battery.



The Edison lamp works at Menlo Park in 1880. In this famous little frame building Edison tested thousands of substances to develop the ideal lamp filament. In the face of ridicule, he gave the world a new and better form of light, and, by inventions in electrical machinery, he began the revolution of industry.





The first Edison electric railway at Menlo Park in 1880, with Charles Batchelor at the throttle. On a trial run the train was ditched at a curve on the one-third-mile track while speeding forty miles an hour. "A beautiful experiment," said Edison.




A contemporary picture portraying Edison, the young telegrapher, at work on one of his hundreds of experiments that made possible the transmission of multiple telegraph messages over a single wire.



Eighteen years ago this 30,000 horsepower turbo-generator of the New York Edison Company was the world's largest. The newest will develop 210,000.




This curious old photograph shows Edison in the cab of his electric railway locomotive developed at Menlo Park in 1882. Railroad engineers at first called his system of electric operation impracticable. Yet today the same basic principle is employed, with, of course, many elaborations, by great American railroads.

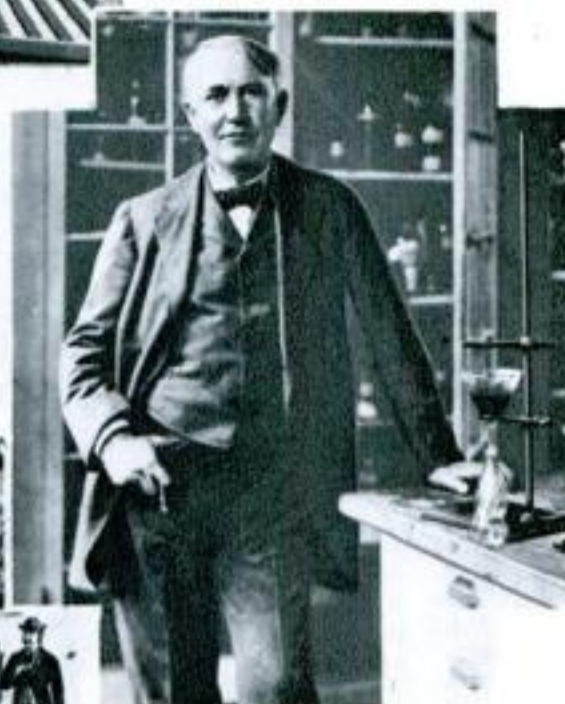


The inventor as he appeared about twenty-five years ago, in his chemical laboratory at Orange, N. J. Edison has more than a thousand patents to his credit in America. At one time he had under experiment no less than forty-five different inventions.

At right: Interior of first Edison central lighting station in New York City, 1882. From a contemporary print.


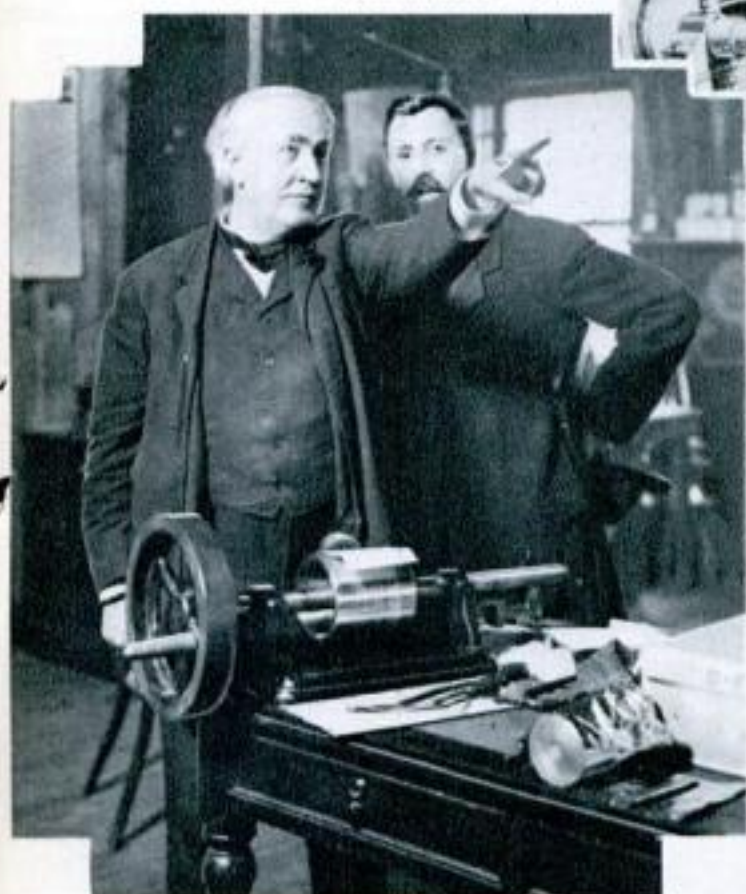


Telling one of his visitors about the invention of the phonograph. In the foreground may be seen an example of his first type of talking machine, in which sound was recorded on a soft sheet of tinfoil fastened around a metal cylinder. These early machines, on one of which Edison's was the first recorded voice, were operated by hand.

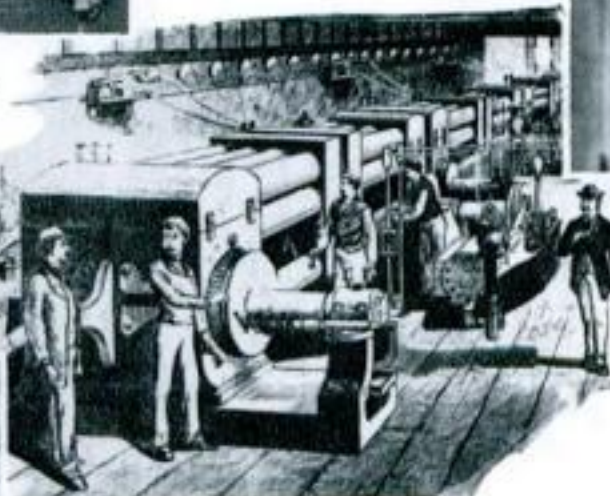

Of late years Edison has welcomed many distinguished visitors to his summer home at Fort Myers, Fla. When this photograph was taken, about ten years ago, his guests were Henry Ford, holding the saw at the right, and the late John Burroughs, famous naturalist (at left). At Fort Myers Edison has conducted experiments to manufacture rubber from weeds.



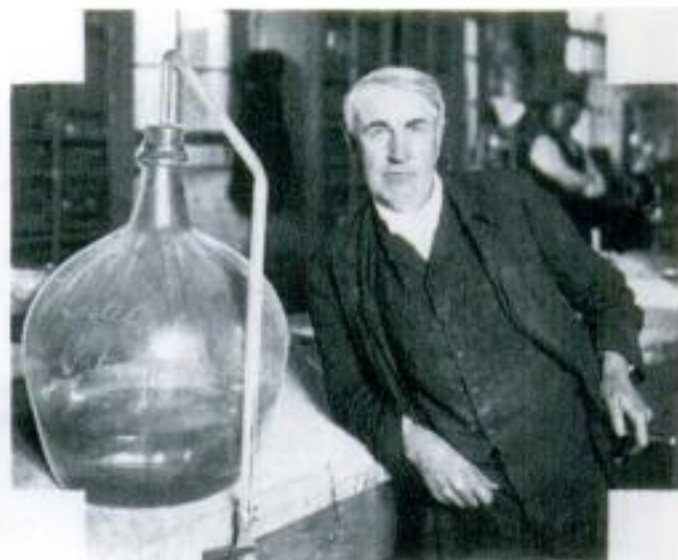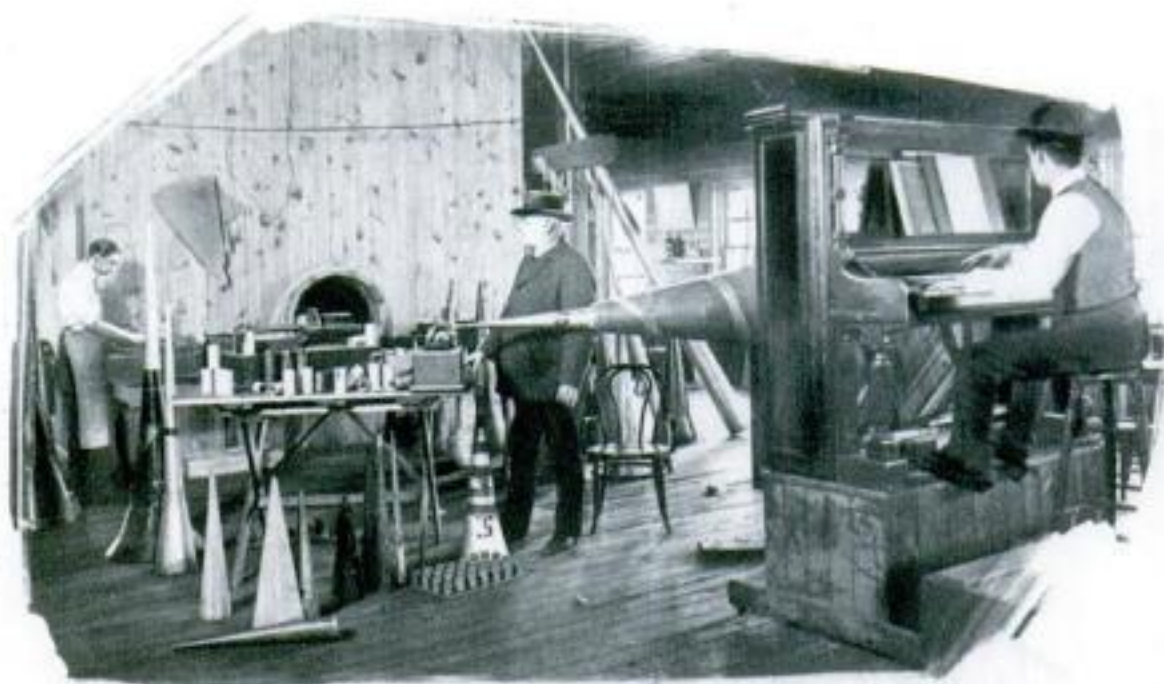

Edison at the age of sixty-five, in his chemical laboratory at Orange, N. J. His immense interest in chemistry began when, a boy of eleven, he rigged up a laboratory in the cellar of his home. Later he worked as a railway newsboy in Michigan to earn money to purchase materials for his experiments.

Since Edison made the first crude phonograph "talk back" to him in 1877, he has never ceased working to improve it. This photograph of about 1902 shows him directing experiments in piano reproduction in his laboratory at Orange, N. J. Note the very long horn which leads to the sounding board of the piano.



In the years preceding Luther Burbank's death in 1926, the plant wizard and Edison were great friends. Here they are in the garden of the former's home at Santa Rosa, Calif., in 1915. From Burbank Edison received many very useful suggestions for his experiments with rubber-producing vegetation.



The storage battery street car which Edison developed about twenty years ago for places where trolley cars could not be used. Above is an interior view, showing the batteries under the seats. At the left Edison is shown trying his hand at the motorman's job.




Edison and his famous "Insomnia Squad" dining in the laboratory at Orange, N. J., during their feverish experiments to perfect Edison's diamond disk phonograph in 1910. For nearly six weeks these men worked day and night, without leaving the laboratory—a feat of remarkable physical endurance. The inventor is seated at the extreme right.



Edison standing beside the Bailey electric auto of 1912, operated by the Edison Storage battery. In an endurance test it ran for 1,000 miles without trouble. Today the long-life battery which he invented in 1898 is used not only for vehicles but for rural and railway lighting systems as well.



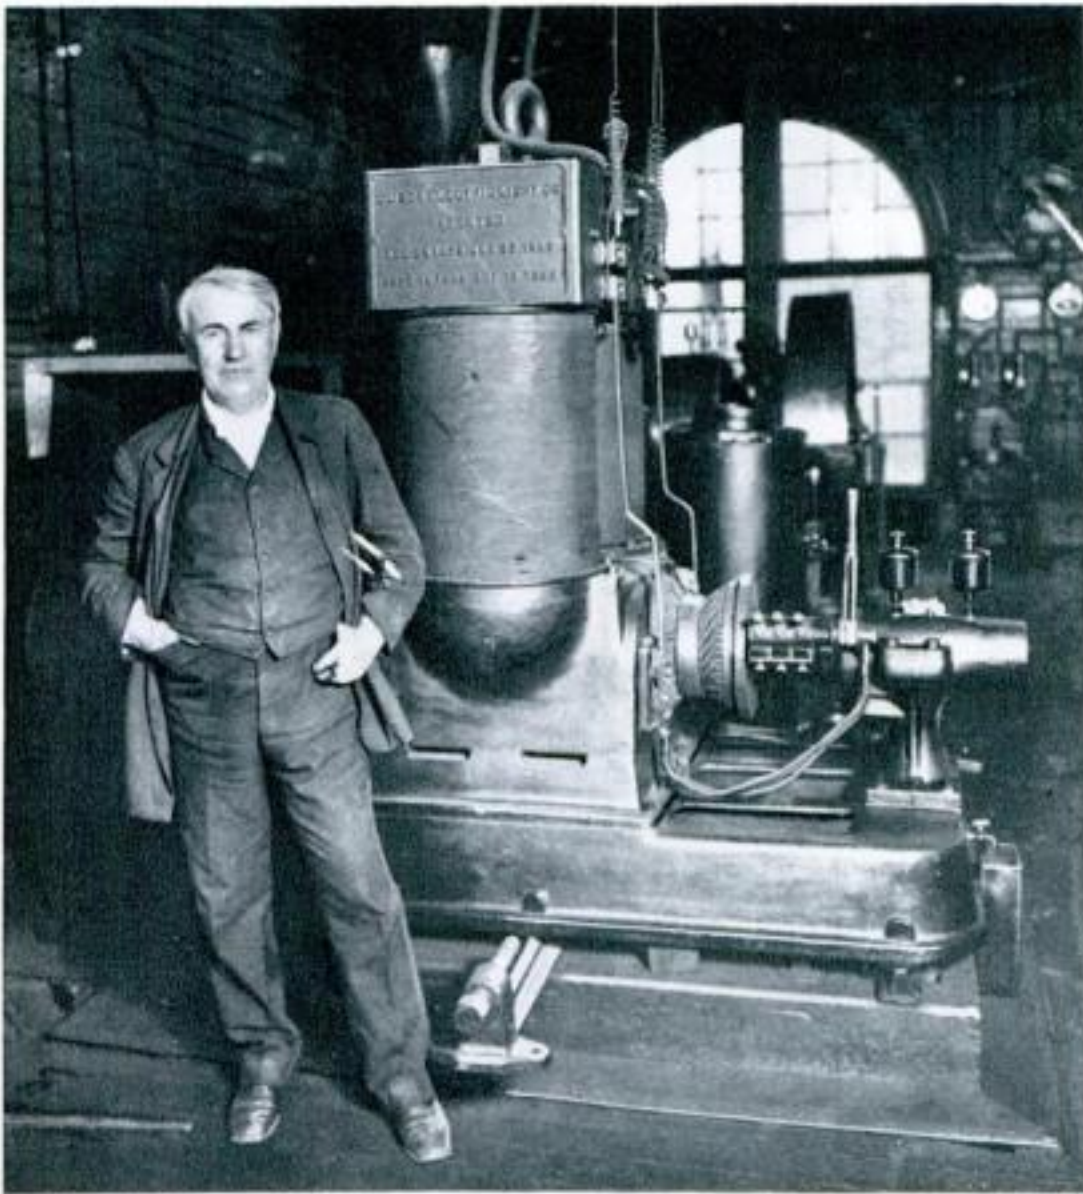

Edison standing beside one of his early electric dynamos of the bi-polar type. Up to the early nineties of the last century generators of this kind were used for isolated lighting plants and for the first central distributing stations. The development by Edison of the dynamo and of systems of centralized distribution of current has brought about revolutionary sweeping changes in industry.



Edison always has made it a point to be on the job with his men—and on time. Above he is seen punching the time clock in his Orange plant. His vast capacity for work is clearly evidenced by the time slips at the right.

WEEK ENDING SEPT. 10

WEEK ENDING SEPT. 17

No. 1

No. 1

NAME

NAME

THOMAS A. EDISON

THOMAS A. EDISON

MON.	TUE.	WED.	THUR.	FRI.	SAT.	SUN.
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00
12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00
7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00
2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00
9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00
4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00
11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00
6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00
1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00
12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00
7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00
2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00
9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00
4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00
11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00
6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00
1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00
12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00
7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00
2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00
9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00
4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00
11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00
6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00
1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00
12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00
7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00
2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00
9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00
4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00
11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00
6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00
1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00
12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00
7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00
2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00
9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00
4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00
11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00
6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00
1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00
12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00
7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00
2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00
9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00
4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00
11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00
6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00
1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00
12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00
7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00
2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00
9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00
4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00
11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00
6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00
1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00
12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00
7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00
2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00
9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00
4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00
11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00
6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00
1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00
12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00
7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00
2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00
9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00
4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00
11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00
6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00
1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00
8:00-9:00	9:00-10:00	10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00
3:00-4:00	4:00-5:00	5:00-6:00	6:00-7:00	7:00-8:00	8:00-9:00	9:00-10:00
10:00-11:00	11:00-12:00	12:00-1:00	1:00-2:00	2:00-3:00	3:00-4:00	4:00-5:00
5:00-6:00</						





Busy at a work bench in his Orange laboratory, about 1902. Men who have worked with Edison say they never have seen him discouraged—even when days of drudgery and repeated experiment have met only failure.




Governments and universities of many nations have conferred high honors on Edison. Here he is with Dean Andrew Fleming West of the Princeton University Graduate School, after having received an honorary degree of Doctor of Laws.

One of the few times when Edison was caught napping. The photographer found him enjoying an outdoor siesta on a camp cot during a vacation in Canada.



A model of the poured concrete house proposed by Edison in 1909. Owning a large plant for grinding and preparing cement, his scheme was to extend the concrete industry by making houses poured into iron frames. A full-sized house was never completed.

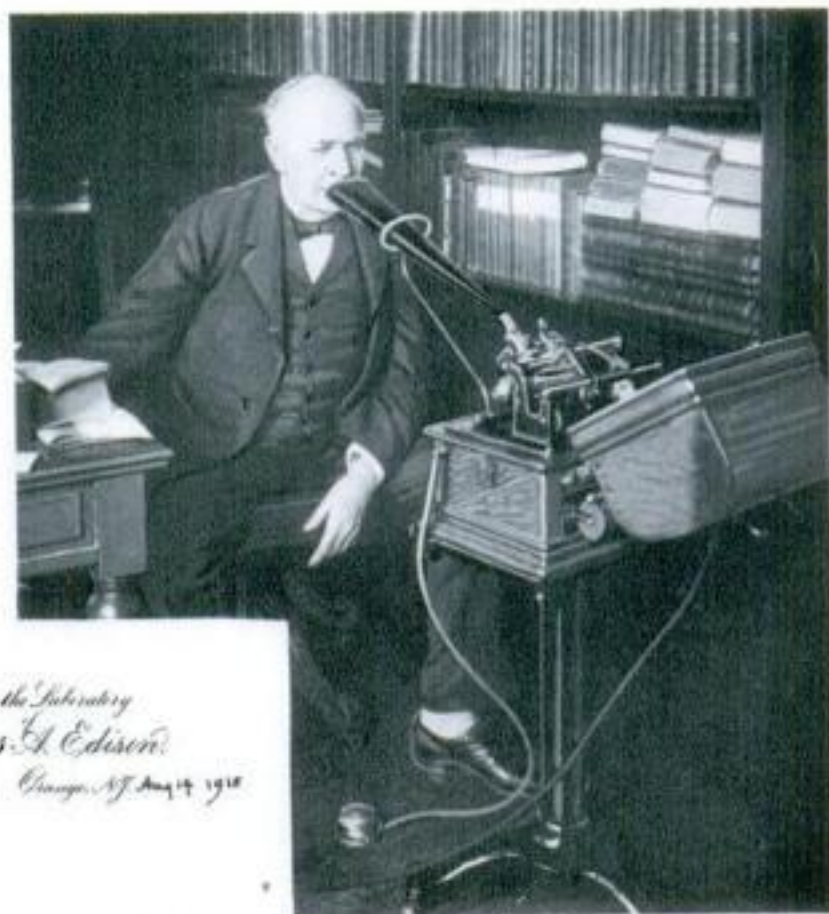

Out of Edison's invention of the phonograph grew the dictating machine, which has become a necessity in many large business offices. This picture, taken in 1921 shows the inventor speaking into the Ediphone in his library.

The letter reproduced at the left was in reply to one from Gen. John J. Carty, telephone pioneer Vice-President of the American Telephone and Telegraph Co., asking what words were first reproduced by the original phonograph.

*From the Laboratory  
Thomas A. Edison  
Orange, N.J. Aug 14, 1918*

Dear Carty


In reply to your question let me say that I was the first person to speak into the first phonograph. The first words spoken by me into the original model and that were reproduced were "Many had a little French" and the other three lines of that verse.

*Yours sincerely  
Thomas A. Edison*



Pitching the first ball for an Edison Works baseball game at Orange. Though he never found time to engage in sports himself, Edison always was a great rooter for the home team.



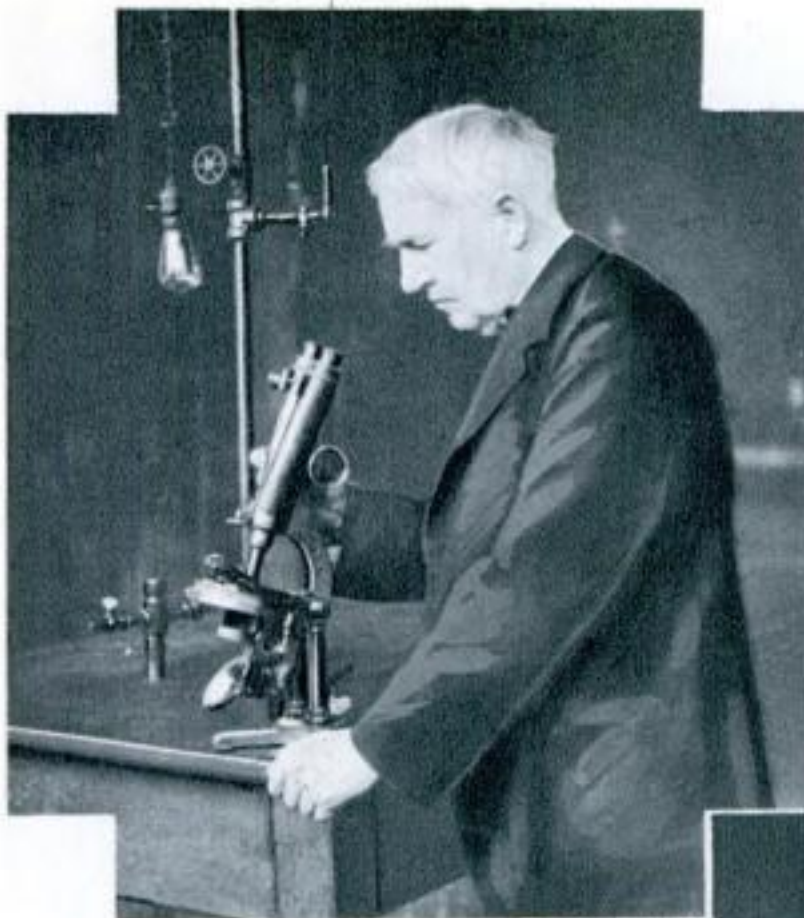

The Edison of nearly thirty years ago, at work with a microscope. At about this time he spent most of his hours in the chemical laboratory, working out improvements in his storage battery for uses in transportation and lighting.




Among the recent applications of Edison's storage battery have been its uses for miners' lamps and mine locomotives. This photo of 1928 shows the inventor examining an improved electric safety lamp.



When two of the world's greatest electrical geniuses put their heads together. Edison and the late Dr. Charles P. Steinmetz of the General Electric Company discussing new apparatus in the office of the latter at Schenectady, N. Y., in 1922.




Of late years Edison has tested hundreds of different kinds of latex-producing plants in his search for an economical substitute for rubber. Here he is making notes on one of his experiments.

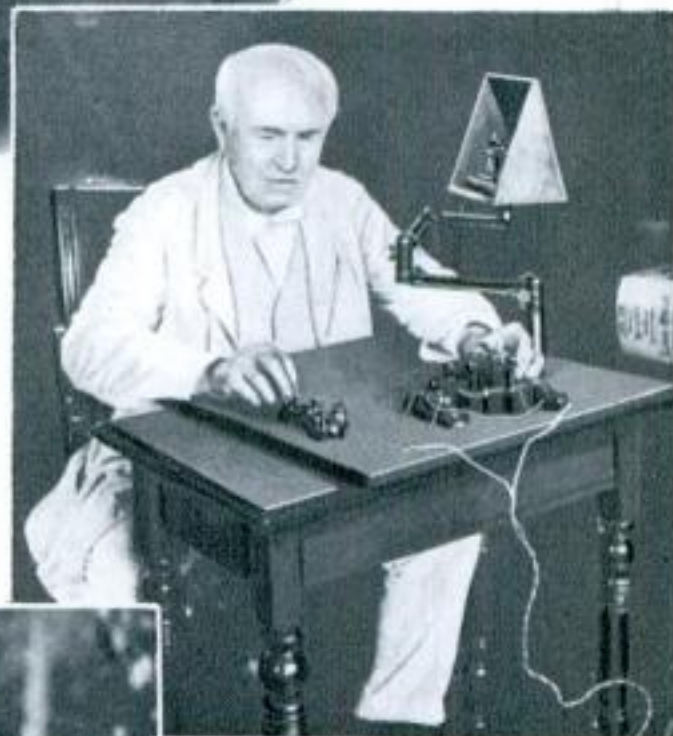

As a young man Edison made his start in life as a telegraph operator, back in the 1860's. After sixty odd years he can still send a message in Morse code, as he proved when this photo was taken.



The face of the Congressional medal presented to Edison early this year to recognize his services.

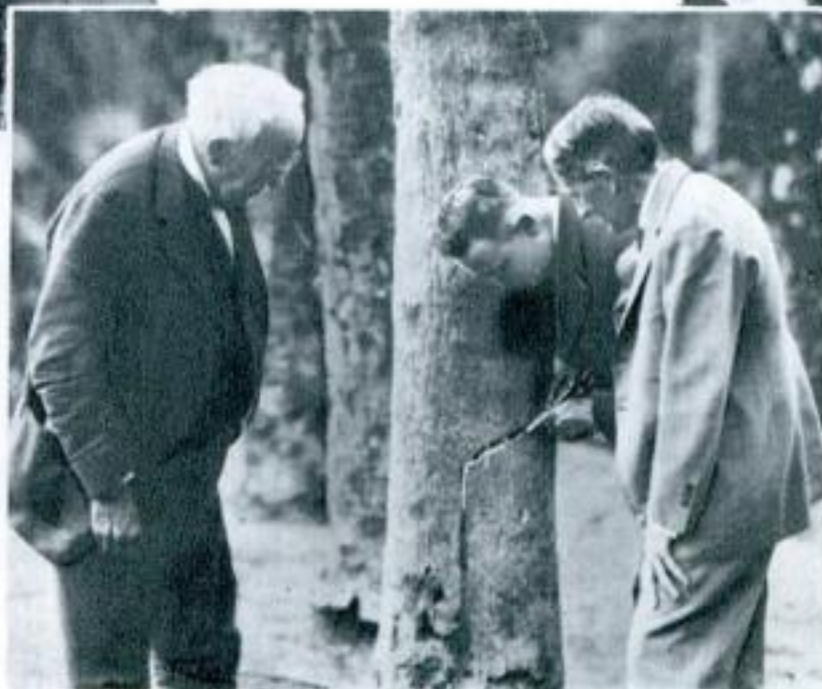

Never too old to learn. Edison, at the age of eighty-one, taking a lesson in rubber production from Harvey S. Firestone, noted tire manufacturer. Firestone (at right) and an assistant are demonstrating to the inventor how rubber trees are cut for the latex to flow. This photograph was taken at Fort Myers, Fla., last year.



Obverse of medal, bearing the inscription: "He illuminated the path of progress by his inventions."





*Drawn especially for POPULAR SCIENCE MONTHLY by B. J. Rosenmeyer*

### MERLIN HALL AYLESWORTH, Showman of Radio

**A**S PRESIDENT of the National Broadcasting Company, this minister's son has transformed broadcasting from a more or less haphazard novelty show into America's newest "big industry." In less than three years he has woven sixty scattered radio stations into a nation-wide network of entertainment, news, and education, building a system which can carry a single program to fifty million listeners.



# Feeding 13,000,000 Radio Sets

*The Head of a Nation-Wide Broadcasting Chain Tells  
How He Delivers Entertainment and News to a  
Vast Audience of Fifty Million People*

By FRANK PARKER STOCKBRIDGE

**I**N LESS than three years radio broadcasting has grown from a kind of hit-or-miss novelty show to almost a domestic necessity; from a scattering of small, independent, and often irresponsible enterprises to the newest of the nation's "big businesses." The days of "fishing around" to pick something out of the air besides amateur night programs have swiftly vanished. Instead, the owner of the average radio set, in almost any remote district of the nation, can readily bring in the finest broadcast programs of entertainment, news, and education. He can hear, across the continent, the inauguration of a president, a symphony concert, a championship football game, or news of the latest ocean flight. The best in radio is at his finger tips.

All this has been brought about by system—by skillfully gathering the loose ends of broadcasting and tying them into a scientific, orderly business of serving the public.

The secret is chain broadcasting.

The other day, I talked with an earnest young business man whose vision and leadership have done much to forge the links in the radio chain. He is Merlin Hall Aylesworth, the forty-two-year-old head of the National Broadcasting Company. In his Fifth Avenue office, in New York City, he explained to me the inner workings of the system which connects sixty broadcasting stations by wire, sixteen hours a day, every day in the year, and which carries the best radio talent to 50,000,000 persons or more in every part of the country.

**C**HAIN broadcasting was an experiment when Aylesworth tackled it early in 1927. Under his direction it has answered, among other things, a question that puzzled all concerned in the days when listeners fiddled with cat whiskers and crystals on homemade sets: "Who is going to pay for programs?"

England solved the problem by imposing a government tax on receiving sets and using the money to run government-operated stations. In America, however, chain programs, paid for by advertisers and radio manufacturers, form a large part of broadcast entertainment.

"Briefly, what we have done by chain broadcasting," Mr. Aylesworth told me, "is to bring the best programs of New York stations within reach of all. By elimi-

nating the element of distance, we have made it possible for anybody, anywhere, with any type of good radio receiver, to hear the best features on the air. Previously, only a few independent stations could afford to broadcast such features and only a fraction of the radio audience could hope to pick them up.

"We have changed all this by connecting some sixty stations, all over the

York, through the control room of WEA, and back over the wires to the Los Angeles station and to all other stations in the chain. It had traveled 6,000 miles by special wire before being broadcast to the people who lived almost next door to the field where the game was played.

"But, why wires?" I asked. "Why not increase the power of your best station and reach the other fifty-nine by radio, having them rebroadcast on their individual wave lengths?"

"Try and do it," was his answer. "In the present state of the radio art, it cannot be done. Part of the program would get through. Part would be lost by fading, static, and interference. Because atmospheric disturbances and interference do not affect wires, we pay the American Telephone and Telegraph Company \$2,000,000 a year to keep our stations connected. Some day engineers may show us how to get reliable communication between stations by radio, and we are experimenting in that direction."

Only one station, WEA, is owned by the National Broadcasting Company. It operates one other, WJZ. All associated broadcasting studios throughout

the country are connected with these key stations in chains known as the Red Network, the Blue Network, the Pacific Coast Network, and in five smaller groups, independently owned and operated. They can take the chain programs or not, as they choose.

**E**VERY associated station that broadcasts a sponsored program for which an advertiser is paying receives fifty dollars an hour. If all the stations take a sponsored program, the advertiser must pay the price of nation-wide publicity. This means \$9,230 an hour with the Red Network of forty-two cities connected with WEA, or \$7,960 an hour with the Blue Network of thirty-three cities connected with WJZ.

In such programs, Mr. Aylesworth explained, there is only perhaps one percent of direct advertising and not more than twenty percent even of indirect advertising. The programs put on for advertisers are almost entirely entertainment.

"Do you ever censor programs as they are being broadcast, switching off connections when a speaker says something disagreeable?" I asked. "You have been accused of that." (Continued on page 153)

**T**HE best in radio for everybody, everywhere—it is an immense achievement. And it becomes doubly impressive as Mr. Aylesworth, in this interview, traces the businesslike, scientific system by which nation-wide broadcasting has been developed. What he says will make you appreciate more than ever what your radio set brings to you.—The Editor.

country, with leased telephone wires. The program offered by any one of them can be broadcast simultaneously by them all. Almost every part of the United States is within easy pick-up distance of one or other of these associated stations."

Though the average time of the chain programs is only three and a quarter hours a day per station, the telephone company receives pay for the wire hook-up for sixteen hours every day in the year. Some stations broadcast all the chain programs; some use hardly any of them; all broadcast purely local features at times. But the special wires of the nation-wide hook-up must be kept open at all times in readiness to give the whole country unusual features or news.

**T**HESE wires, Mr. Aylesworth explained, run in pairs from WEA, the principal station of the National Broadcasting Company, to every other station in the chain. For instance, one circuit directly connects Los Angeles, Calif., with WEA. Last season, a football game played at Los Angeles was broadcast over the chain. Though the Los Angeles station was only a mile from the football field, the report was telephoned direct to New



**B**EHIND a somewhat ponderous name lies a new chemical science—one which opens a field of revolutionary importance, yet also explains in astonishing ways some of the most familiar facts in the world. In this article one of the first American investigators in the field of colloid chemistry tells how it is answering such riddles as why postage stamps stick, why jelly jells, and a host of others.—The Editor.

**T**WO chemists of the United States Department of Agriculture were testing recently some recipes for chocolate cake. A few of the cakes came out a deep, rich brown, like old-fashioned chocolate jumbles. Others turned out a dull, brownish gray. The chocolate was the same, the flour was the same, milk and other ingredients were not notably different. What caused the differences in color? The answer, experiments showed, was colloid chemistry.

Thousands of elderly persons all over the world find themselves slowly going blind. Doctors call the trouble cataract; a slow clouding of the lenses of the eyes. What causes cataract? Dr. Jacques Mawas, in his recent book on eye diseases, blames it on improper colloid chemistry.


Last winter the United States Post Office Department asked the Bureau of Standards to investigate complaints that postage stamps were not sticking properly to envelopes in the mails. The investigation exonerated the stamps and blamed the trouble on envelopes and careless stamping. How were these investigations made? Again, methods and principles were those of colloid chemistry.

**A**LITTLE past midnight on the morning of March 13, 1928, the St. Francis Dam, a storage reservoir of the water system of the city of Los Angeles, collapsed, carrying scores of sleeping ranchers to their deaths in one of the great disasters of the century. Why did the dam fail? Geologists blame it on facts of colloid chemistry.

In the laboratories of great flour mills experts use the

# Everyday Wonders in Colloid Chemistry

By E. E. FREE

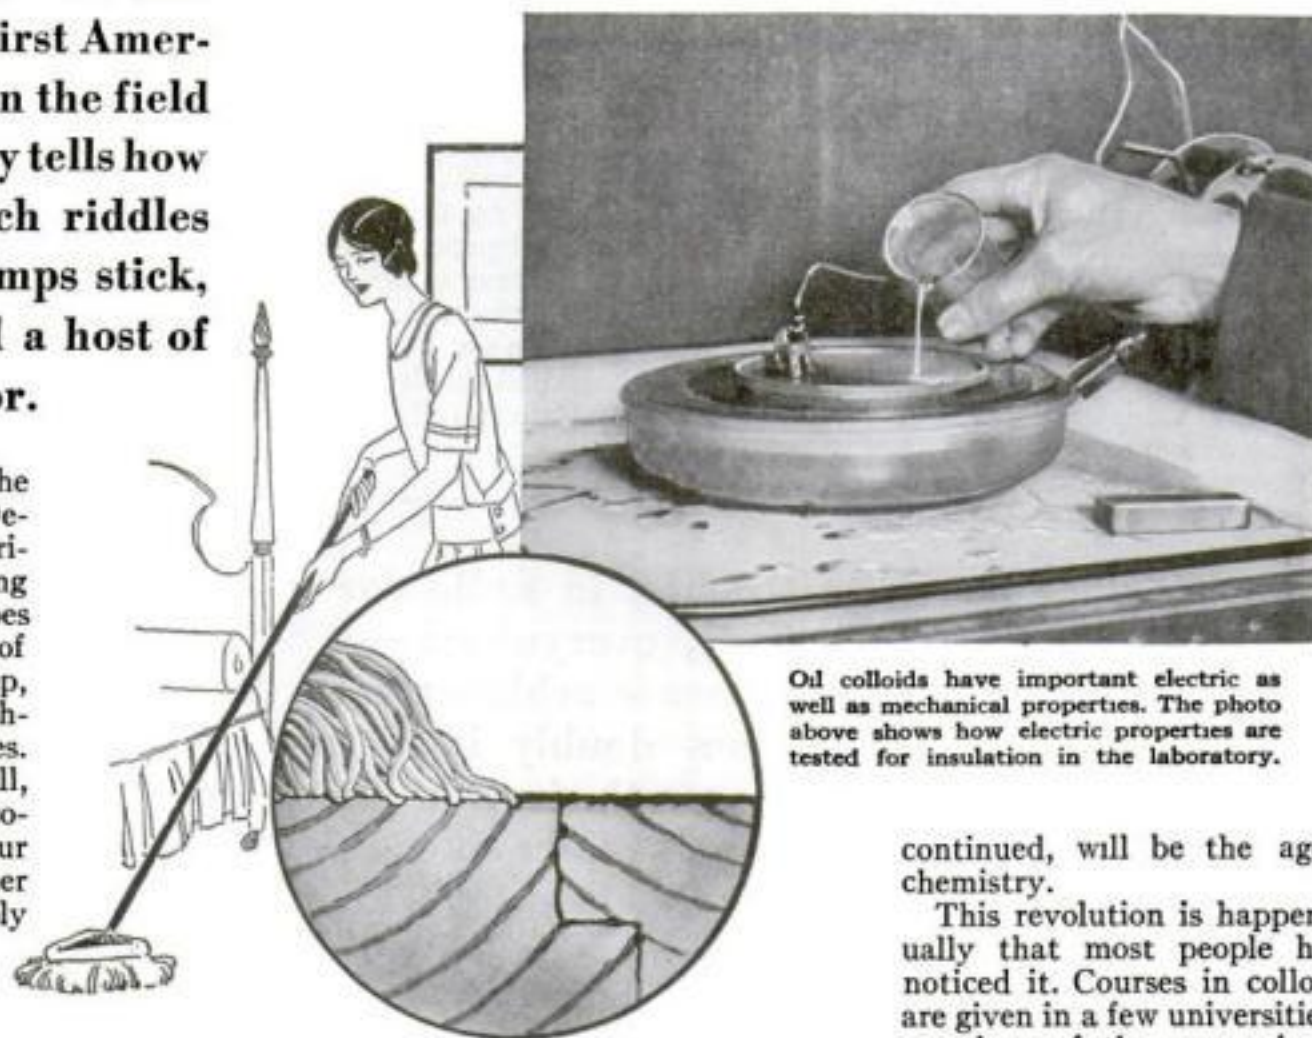

Oil colloids have important electric as well as mechanical properties. The photo above shows how electric properties are tested for insulation in the laboratory.

How a mop leaves a colloidal film of floor oil for a smooth covering over the fibers of rough wood.

methods of colloid chemistry to test the quality of flour. Manufacturers of drugs use colloid chemistry to make forms of gold, silver, arsenic, and other poisons which are safe for use in medicine.

Every housewife who beats up a salad dressing, every man who shaves, every person who uses soap to help wash away dirt, is employing colloid chemistry. A distinguished American chemist remarked recently that the age of synthetic chemistry is almost over. To replace it, he

continued, will be the age of colloid chemistry.

This revolution is happening so gradually that most people have scarcely noticed it. Courses in colloid chemistry are given in a few universities. There are mentions of the new science now and then in the newspapers. But for most people it is merely a mysterious new name.

**A**CTUALLY, it is more like a new understanding. Facts about colloids are as old as mankind; older, in fact, for all living matter is made of colloids. Colloids mean things like glue; for glue, in Greek, was "colla." That was the only way that colloids could be named when they first attracted scientific attention, for nobody then had any idea of their real character. All that anybody could say was that typical ones among them were sticky, formless things like glue or white of egg or chewing gum; things quite different from clear, crystalline substances like diamond or rock crystal or sugar. Colloid chemistry grew up as the chemistry of glue-like things, just as sugar chemistry deals with the reaction of sugars, or metallurgy is the chemistry of metals. It has its synthetic phases and its analytic ones. Some colloids can be made synthetically just as some sugars can. Sometimes colloids need to be tested, as analysts assay metals.

Nowadays it is known that all colloids have significant family resemblances in internal



Dr. Daniel T. MacDougal of the Carnegie Institution measuring growth of a tree. He finds that colloidal reactions control the growth.





Courtesy Washburn Crosby Company.

Laboratory tests, as pictured here, reveal that colloidal substances in flour and dough control the raising, the baking, and the fine quality of bread and cake.

structure, just as all the higher animals have similar skeletons, or all wood is made up of fibers. The discovery of these internal likenesses is one reason why colloid science has grown so rapidly. As long as ten thousand years ago potters knew how to shape lumps of clay into pots and dishes; now called a colloid chemical art. In the days of Julius Caesar wine makers knew how to clarify their wines with clean white clay, another application of colloid chemistry. These arts had been learned accidentally. Nobody really understood them; so they could not be improved.

**T**HE key to understanding was made of gold. Fifty years ago John Tyndall, the same British physicist whose lectures on popular science made him both rich and famous, used to show his audiences an experiment still called the "Tyndall Effect." A powerful beam of light is sent through what seems to be clear water. Instantly the beam becomes luminous, as though the water in its path were on fire. A similar effect is seen when the powerful light beam of a magic lantern or a motion picture projector passes through the air in a dusty or smoky room.

Nobody understood this effect until a German chemist, Professor Richard Zsigmondy, began working, about thirty years ago, with solutions of pure gold. If gold leaf is reduced to a sufficiently fine powder and that powder suspended in water, the result is merely a temporary gold suspension like a stirred-up mixture

of water and sand. In a moment or two the flakes of yellow metal settle out on the bottom, leaving the water clear. Flakes of pounded gold are known to have been suspended in just this way in one or two of the rare and curious liquors manufactured by medieval monks. But if metallic gold is first dissolved in acid and that solution mixed with water, the gold never settles out. Thus is made, for example, the slightly yellowish solution of gold chloride which photographers once used to make gold-toned prints. The chief difference between this and the suspension of golden flakes is in the sizes of the particles. In the ancient gold-flecked liquors the particles were large enough to be seen individually and to settle out quickly. In the photographer's solution the gold particles are so tiny that they are in-

How colloidal egg in coffee makes invisible grounds (left) clump together (right) and settle to bottom.



visible and never settle. Many of them are single gold atoms.

**P**ROFESSOR ZSIGMONDY knew, however, that it is possible to make remarkable solutions of gold which are not like the usual ones in acid or like the gold-flecked suspensions. Some of these are pink or crimson in color; others are a clear sky blue.

To find out what these beautiful gold solutions really were, Professor Zsigmondy and an associate, Dr. H. Siedentopf, invented the ultramicroscope, one of the most useful instruments of modern science. With it Professor Zsigmondy explained not merely red and blue gold, but the fundamental secret of colloid chemistry, for it was discovered that these colored solutions were really colloids.

Once learned, the secret proved as simple as the greater secrets of Nature usually are. It is merely a matter of the sizes of particles. Large

gold particles the size of sand grains are yellow and immediately settle out of water. Very small gold particles about the size of atoms are invisible and stay in solution forever. Between these two classes there is an intermediate group of particles larger than atoms but not so large as the grains of golden sand.

**T**HESE medium-sized particles, like a trace intermediate between giants and dwarfs, make the colloids. The smallest gold ones, just a little larger than atoms, color the water rose pink. Particles a little larger create the crimson gold solutions. A trifle larger still, they show a violet tinge. The largest of all, not much smaller than visible gold flakes, produce the blue gold solutions, like the blue of the sky.

Nowadays this knowledge of gold colloids is put to practical use in making ruby glass, some of the best grades of which owe their brilliant red and purple tints to the presence of myriads of tiny particles of colloidal gold, scattered through the glass.

These colloidal particles are too small to be seen under any modern microscope. Even the ultramicroscope does not disclose them directly. What it does do is to illuminate a tiny slice of the colloidal solution with a very intense beam of light, much as in Tyndall's experiment with the beam of light made visible in water. This illuminated slice of the solution is then viewed from above through high-power microscopic lenses. The eye then sees a marvelous spectacle of moving, interlacing points of light, like a million dancing fireflies. These are the colloidal particles, themselves too small to be seen but each of which reflects its tiny visible light ray.

The unending dance of the particles



With microscopic knives in this laboratory apparatus scientists dissect single cells so that they may prove the colloidal nature of living matter.

Delicate gages on a penetrating needle of this instrument test the stiffness of jelly, which is a colloidal property important both in foodstuffs and in the protoplasm of living cells.



is an example of the famous "Brownian Movement" first seen a century ago by the Scotch physician, Dr. Robert Brown, who noticed the similar motions of visible dust particles in liquids under his microscope. Dr. Brown's visible particles merely slid around sedately like slowly-revolving waltzers. Their size keeps them sluggish. The tinier particles of the colloidal solutions dash madly in every direction, seemingly yards at a time, like the violent acrobatics of a Russian ballet. What causes all the motions is now known to be a bombardment by the continual quivering of the atoms and molecules of the liquid.

ONE service of this beautiful ultramicroscopic dance is to give a clue to an important property of nearly all colloids—providing, incidentally, an explanation of why egg clears grounds out of coffee.

Under the ultramicroscope the colloidal particles may be seen to die as well as dance. The dancing light specks of colloidal gold can be killed by allowing a tiny trace of acid to diffuse into the drop-let of solution under the ultramicroscope. The dance comes instantly to a tragic end. The tiny particles rush together into clumps, too large for dancing, like ballroom guests in sudden panic. From a test tube full of the colloidal gold solution thus treated with acid, the color vanishes. Presently a trace of dusty, brown powder collects on the bottom. That is the once-colloidal gold.

THIS clumping of colloidal particles is what is called "flocculation," and is what happens to the egg in coffee. Both the white and the yolk of an egg are colloidal materials. Dumped into hot coffee, the egg colloid flocculates. The larger clumps and flocks thus formed rapidly settle. As they do so they sweep down to the bottom of the coffee pot the powdered coffee grounds which were not heavy enough to settle by themselves.

Avoidance of this flocculation is the explanation of the rich brown chocolate cakes studied by two chemists of the Department of Agriculture, Miss Emily Grewe and Dr. E. O. Whittier. The ingredient found to produce these deepest browns was baking soda. This chemical is known to oppose the

flocculation of colloids. In the cake it keeps the fine powder of the chocolate in separate particles, which makes it most effective in producing the brown color. With too little soda the acids of the milk or other ingredients flocculate the chocolate particles, damaging the color.

Smokes and fogs are other colloids to which these facts of flocculation apply. They are solid or liquid particles scattered in a medium which happens to be gaseous instead of liquid. Otherwise they act just as the colloidal solutions of gold particles. The Brownian Movement may be seen beautifully in a wisp of cigar smoke under the lenses of an ultramicroscope. Fog or smoke can be flocculated and made to vanish just as the egg colloids are flocculated in the coffee. This possibility, in fact, offers what is probably the best line of attack on the problem of dispersing fog, now so important to aviation. Even

the blue color of the noonday sky and its frequent red color at sunset are colloidal phenomena due to the action of tiny floating particles on sunlight, just as the particles of colloidal gold act on light rays to make those colloids red or blue.

COLLOIDS possess, of course, many other unusual properties. One of these, for example, is an enormous spread of surface, for an ounce of gold in the form of colloidal particles has millions of times more

gold surface than the same amount of gold in the form of gold leaf or of a gold coin.


This multiplication of surface is highly important in the chemistry of the process called catalysis, by which new reactions are worked and new compounds made by the mere presence of the catalyst. Colloids are among the best known catalysts; but this is too long a story to be more than mentioned here.

ONE great group of colloids familiar to every housewife includes all kinds of salad dressings and jellies. The particles that float in air to make a smoke-colloid or in water to make colloidal gold are solid ones. It is just as possible to make liquid particles float as colloids; liquid vinegar, for example, beaten up in olive oil to make a salad dressing. Milk and cream are other similar mixtures, for these fluids consist, the ultramicroscope shows, of tiny liquid particles of fat and oil scattered through a watery fluid. Making butter is no more than flocculating this milk colloid so that some of the fat particles stick together to form the butter while the watery liquid is left to make the whey.

A housewife who makes salad dressing has just the opposite intention from the butter maker. She wants to keep the dressing from flocculating. If it does flocculate accidentally she says that it "breaks" or separates; the oil into one layer, the vinegary water into another. Chemists now know several harmless materials which may be added to oily and watery mixtures to prevent this colloidal flocculation, so that salad dressings will last longer and will stand more warming or handling than they used to do.

Jellies add another complexity to the picture, for most of these contain tiny, liquid, colloidal globules that can shrink or swell individually while they are suspended in the solution. If a human being could pass himself through some kind of mechanical ultramicroscope, come out the size of an

(Continued on page 164)

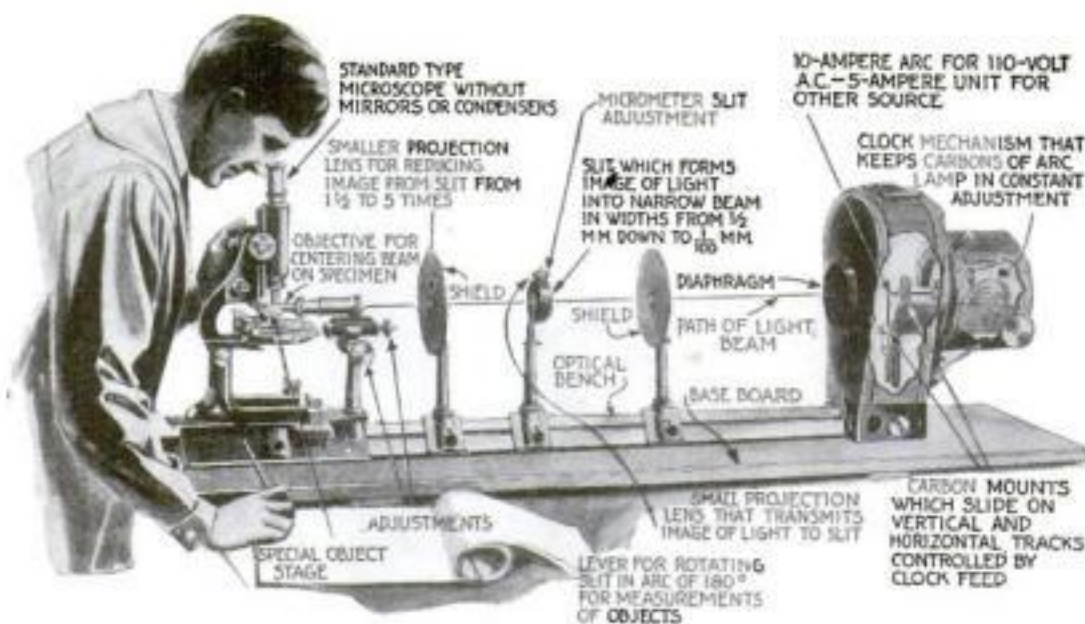

The ultramicroscope, chief instrument for the study of colloids. It reveals colloidal particles, which are too small to be seen individually, as dancing points of light.



How colloids in shaving soap form a smooth film over the skin, so that the razor slips along without catching.



Testing the adhesiveness of postage stamps with special apparatus in the Bureau of Standards laboratory.



How colloidal gum of a postage stamp fills up the unevenness of a paper envelope to make the stamp stick.





# The Mightiest Airplane That Ever Flew

**B**ENEATH the 157-foot wingspread of the biggest airplane ever built—the giant “flying yacht” just completed by Dr. Claude Dornier in Germany—could be hidden a pair of Uncle Sam’s greatest bombers. Construction of the new German monster, pictured on this page, required more than two years, and was one of the greatest engineering feats in aviation history. In her first trial flight with twenty-five persons aboard, the plane rose from Lake Constance, Switzerland, easily lifting her fifty-five-ton loaded weight after a run of only twenty-eight seconds, and flew at 131 miles an hour. She is designed to carry 100 passengers on short cruises, besides a crew of sixteen.

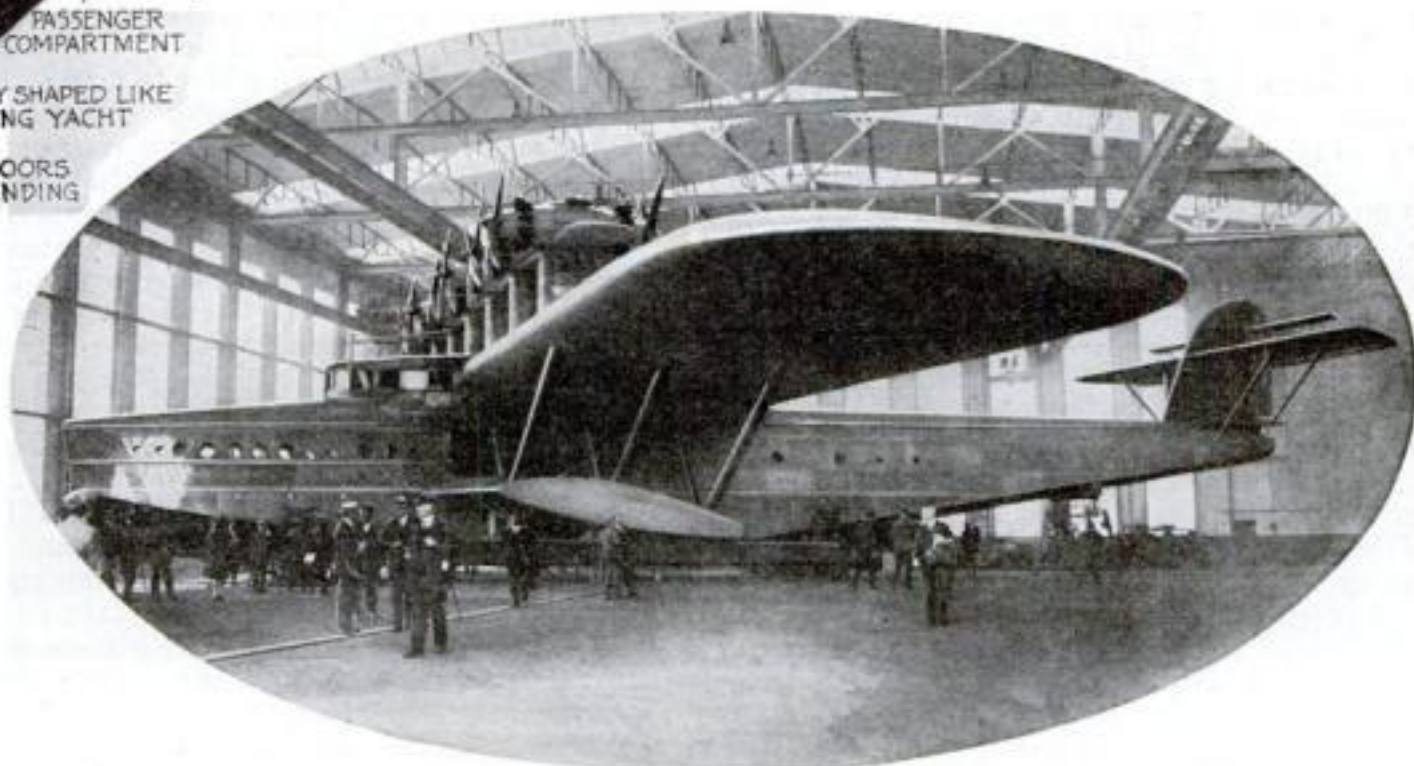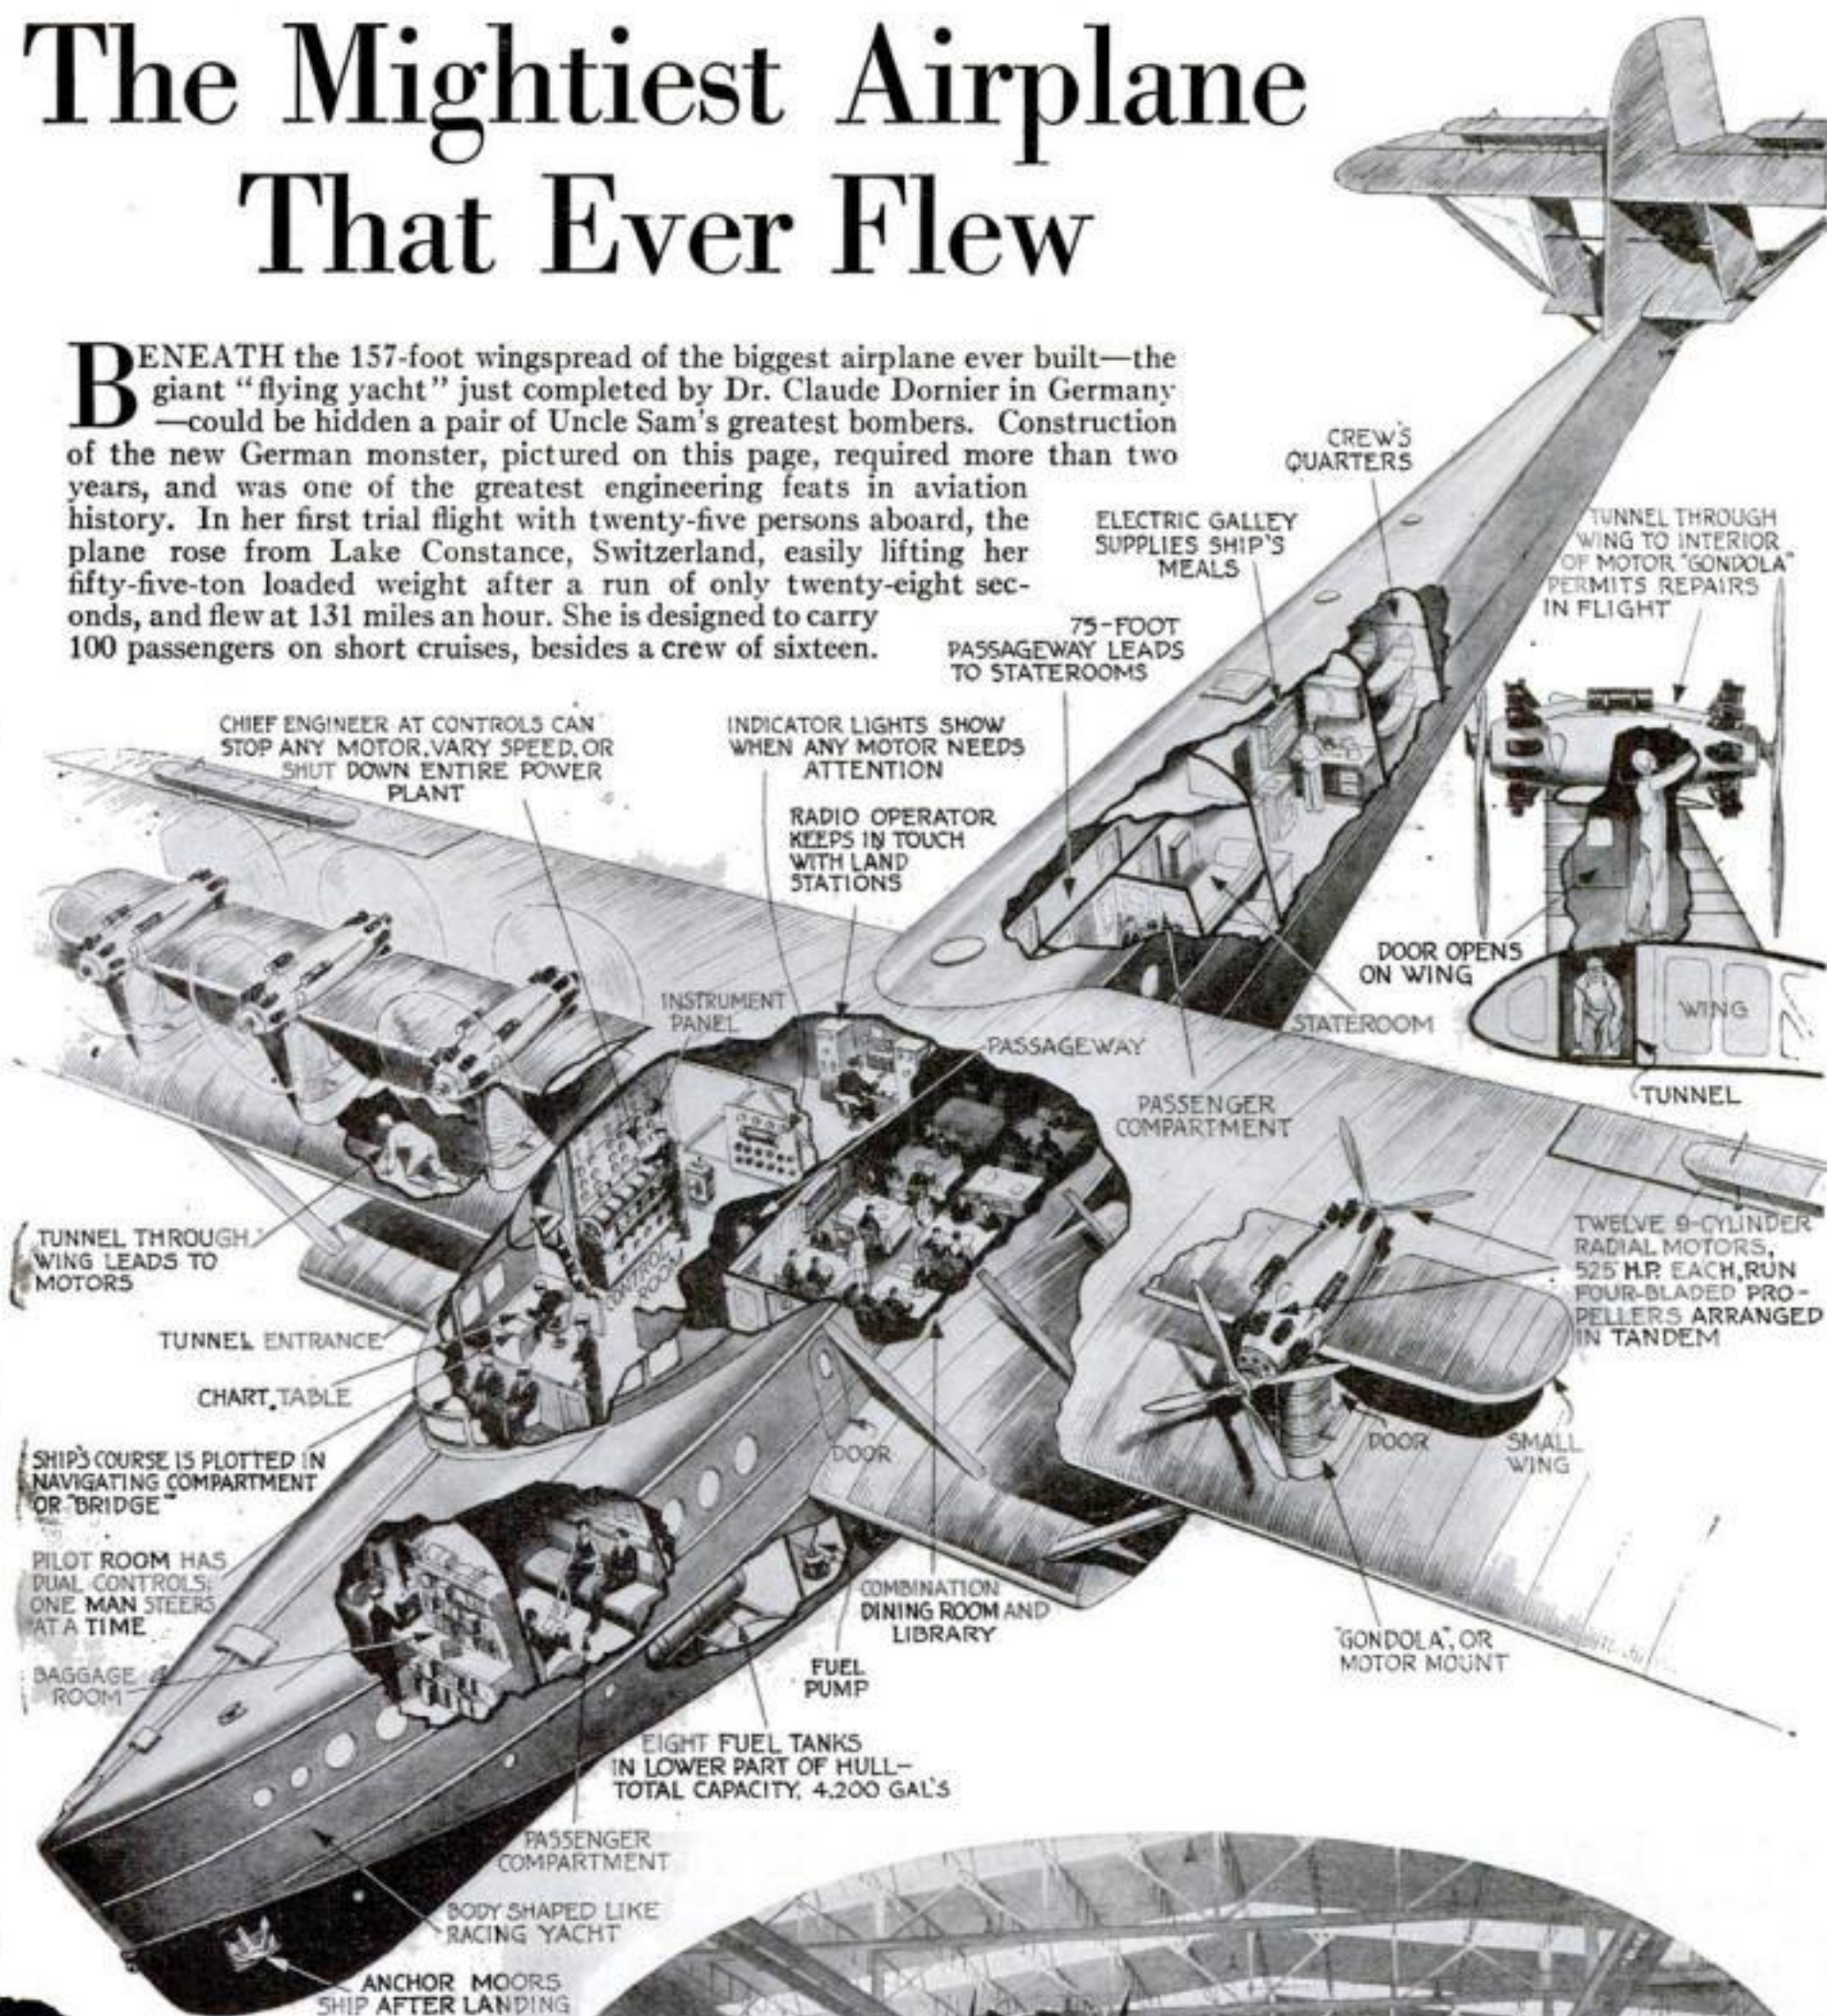

The new Dornier plane, 230 feet long and 33 feet high, just before launching at Lake Constance. It weighs almost four times as much as the largest plane previously built, yet can carry as much weight again in useful load.

Built with the lines of a racing yacht. This drawing is broken away to show the interior with its spacious accommodations. Three decks are provided for the control rooms, passenger accommodations, and fuel and storage compartments. This is the first airplane to have a captain and a chief engineer. As on an ocean liner, the pilot's only job is to steer. The small drawing at the upper right shows how the engines may be repaired in flight. Mechanics crawl through wing tunnels to replace small parts.



# Back of the Month's News

By

KARL VOOUGHT

**T**HE *Pennsylvania*, largest commercial vessel ever built at an American shipyard, was launched recently at Newport News, Va. This 34,000-ton turbo-electric liner of the Panama-Pacific Line will make fortnightly runs between New York and California by way of the Panama Canal.

The new vessel is only one of a bumper crop of sea giants taking to the water this year. The record-breaking German liner *Bremen* is described elsewhere in this issue. In England, the *Britannic*, largest motorship ever launched in that country, has just been completed. It has a length of 600 feet, fifteen feet shorter than the *Pennsylvania*. It will be put into service between England and America and used for winter cruises in the Mediterranean.

At the same time, the British Cunard Line announces plans for two 1,000-foot liners, vessels which, if placed on end beside the Woolworth Building, would tower 208 feet above it. These ships will exceed in length the world's largest liners, the British *Majestic* and the American *Leviathan*, by nearly 100 feet.

Although the *Britannic* is propelled by Diesel motors instead of electricity, enough electric current is generated and used on board to supply a town of 30,000 inhabitants. It performs a variety of tasks, such as cleaning silver, peeling potatoes, manufacturing ice cream and printing menus. In its elaborate equipment, the vessel is said to contain thirteen miles of pipes and 200 miles of wire. About 3,000,000 rivets were used in its construction. The weight of these alone would equal that of half a dozen average locomotives.

## Quakes Recorded by Light

**T**HE record of the changing surface of the earth is being kept by a new type of seismograph, installed at Harvard and Fordham Universities, which writes with a finger of light instead of a pen.

The older instruments, in which the tremors of the ground moved a paper under a pen, thus recording the strength of the earthquake, were sluggish in action. But light is without friction, and the slightest shiver of the earth's crust is traced by the new mechanism, giving increased accuracy to scientific records.

A Russian, Prince Galitzin, is the inventor of the improved seismographs. One of them, installed in a dark, vault-like room twenty feet below ground at Fordham University, New York City, is so sensitive that a cigarette smoked in the same room will alter the temperature sufficiently to affect its operation.

The instrument is bolted to a concrete pier that extends down to bedrock and is entirely separated from the rest of the building. When the bedrock trembles, twin pendulums on the seismograph swing coils through a magnetic field, generating electricity, the amount depending upon the length of the swing. A sensitive electric instrument, to which the current is carried, operates a movable mirror, tilting it back and forth in proportion to the strength of the incoming current.

A beam of light, directed to the mirror, is reflected to a sheet of photographic paper slowly turning on a drum. If the mirror is still, the line made by the light beam is straight. But when the mirror moves, the line wavers; the height of the waves show the violence of the tremors. The lamp throwing the beam winks at the end of every minute for three seconds, leaving tiny gaps in the record. Thus, after the photographic paper is developed, the exact time and duration and intensity of a quake can be determined.

With such instruments, science will be able to trace baby vibrations, tremors not

classed as earthquakes. In India, a similar apparatus is said to have recorded storms at sea through the delicate vibrations caused by waves pounding on a shore a thousand miles away.

## Guarding Buildings from Decay

**C**HEMISTS of the British Government recently advised owners to wash the faces of stone buildings occasionally with hot water and soap to protect them from the action of stone-eating acids in the air.

Erosion of stone buildings is especially rapid in large and smoky cities and in countries of frequent fogs, such as England. A discovery of effective preventive measures will mean an annual saving of millions of dollars.


Carbon dioxide, always present in the air, is one of the gases that combines with building materials to form acid destructive to stone and mortar. But the chief menace comes from coal smoke, especially smoke from soft coal.

Smoke consists largely of tiny particles of carbon which are not burned by the fire and are thrown into the air. When the fuel is soft and easily broken up a greater number of the carbon particles are carried up the chimney before they have time to catch fire. This is the reason soft coal smoke is denser than the smoke produced by hard coal.

In smoky air there is either sulphuric acid or the gases that will combine with rain water to form it. This is known from tests of rain water made at various places. In New York City, for instance, experiments have shown that the equivalent of a thousand tons of concentrated sulphuric acid falls on the roofs and streets of that city every six months. This is sufficient to eat up forty carloads of iron roofing, it has been estimated. Its effect upon stone over a period of years can readily be imagined.

**I**N THE industrial city of Leeds, England, the precipitation of this acid is even greater. It has been calculated that rain and dust during a single year bring down seven tons of sulphuric acid for each square mile of the city.

Smoke in the air also increases fog in seaport cities, and fog hastens the action of stone decay. Fog, like rain, is produced by drops of water forming about a central nucleus, such as a smoke or dust particle,

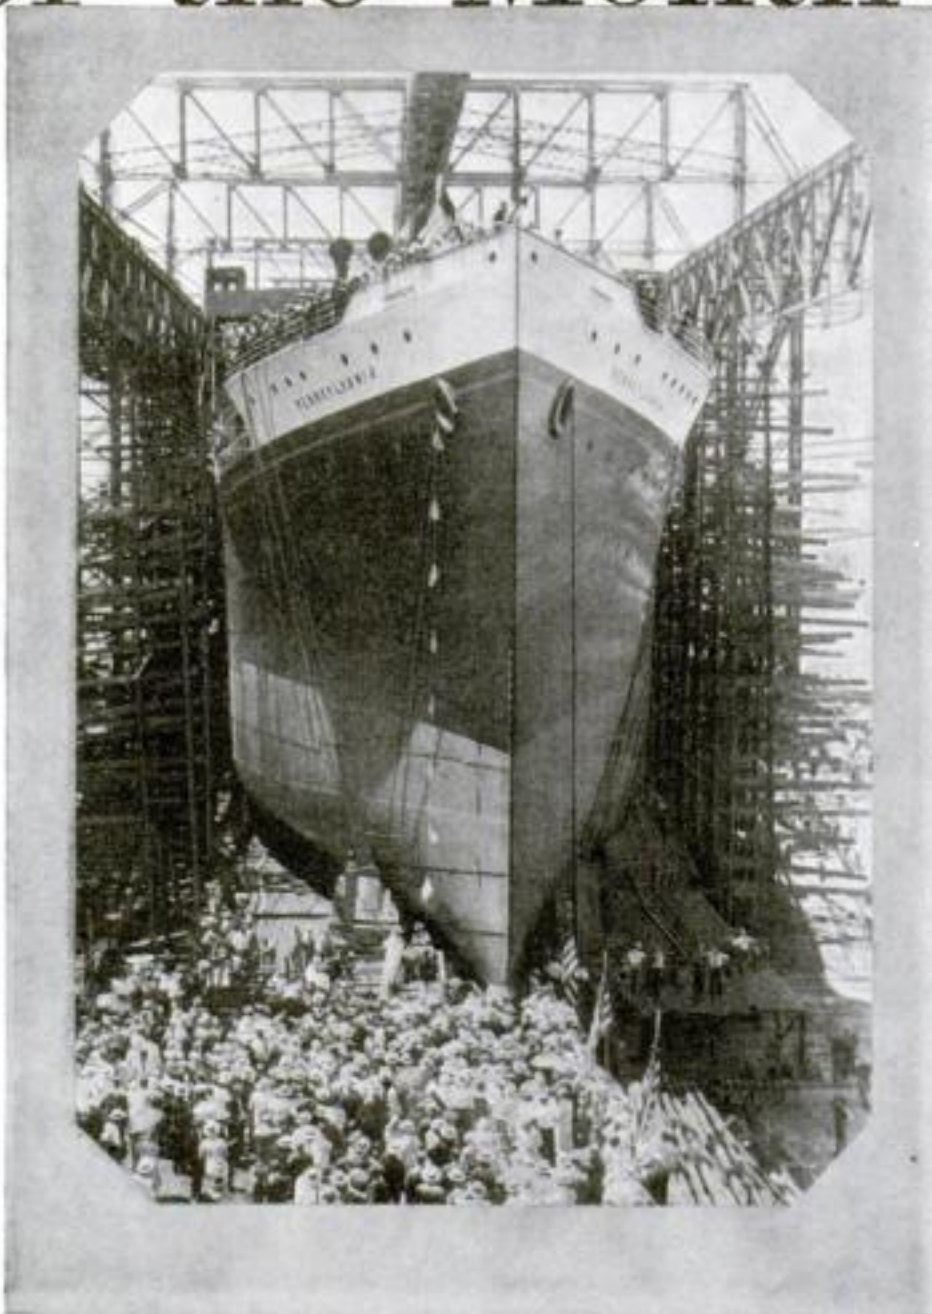

The 34,000-ton turbo-electric liner *Pennsylvania*, largest commercial vessel ever built in America, a moment before sliding down the ways. She will sail between New York and California via the Panama Canal.



but in fog the drops are extremely small, often no larger than one twenty-five-thousandth of an inch in diameter. Sometimes, it is said, there may be scarcely more than a gallon of water in a cubic mile of fog.

### An Arctic Walrus Hunt

A CHASE that may take explorers of Chicago's Field Museum of Natural History as far north as Wrangell Island, in the Arctic Sea, has as its goal a few fine specimens of walrus. Under the leadership of Bruce Thorne of Chicago and George Coe Graves II of New York, the expedition is sailing in the specially fitted power schooner *Dorothy* into a sea made perilous by floating ice. There they will seek the most difficult of all animals to hunt, and, if successful, bring back several of them to be posed in a nature-study group at the museum.

Nowhere but in the Arctic



An unusual photograph of a herd of walrus asleep on an ice floe in the Bering sea. A full grown walrus may weigh 3000 pounds.



Feeding a baby walrus from a bottle. The young walrus are covered with short brownish fur, which rubs off with advancing years. The animals are nearly extinct.

Specially fitted power schooner *Dorothy*, in which explorers of the Field Museum of Natural History are sailing into the Arctic, hunting walrus specimens.

are these ungainly marine mammals to be found. There are only two varieties, an Atlantic and a Pacific form, both now rapidly becoming scarce and confined to the upper regions of the Arctic. Years ago walrus were plentiful along the coast of Alaska, while they ventured as far south in the Atlantic as Newfoundland on the west and the north of Scotland on the east. They were hunted for their oil, for their hides, and for the ivory of their drooping tusks. Harpooners in boats, and hunters who shot or stabbed them on land, have all but accomplished their extinction in recent years.

Striking in its physical appearance, a full-grown walrus may attain a length of twelve feet, and may weigh as much as 3,000 pounds. They are harmless, except when attacked. The Field Museum's expedition, if it is lucky, may encounter a school of these animals, for they herd together in a remarkably developed social organization.

corn, potatoes, or wheat per acre. This prophecy was made recently by Dr. Edwin E. Slosson, American chemist and author. For the farmer such a change would be of vast importance. It would mean efficiency impossible under present methods, with a resulting improvement of rural conditions. For the city dweller, it would bring more nourishing food at lower cost. For the record of the past has shown that when chemist and farmer join hands, profit results.

Not many years ago, southern states passed sanitary laws for the disposal of cotton seeds, which rotted in huge piles beside the gins. Chemists examined this waste—and found a gold mine. From these lowly seeds now come many valuable products, ranging from soaps to nitroglycerin, roofing paint to writing paper, and sausage skins to photographic film.

Blackstrap molasses, once a staple, has gone out of style as a table delicacy. But from it, the modern chemist is extracting

valuable ethyl alcohol. And from "bagasse," the cellulose pulp left after sugar cane is run through the rollers, more than 200,000 square feet of insulating board was made last year.

Formerly, citrus growers of California paid a dollar a ton to get rid of the waste products of their oranges and lemons. Now, these same wastes are converted into citric acid and oils, yielding the

growers a million dollars a year.

The chemist turns waste to wealth. From common peanut shells, high grade cellulose, worth \$4,500,000, may be produced annually, according to Charles H. Herty, noted New York chemist.

When the corn borer began to menace the fields of the Middle West, the farmers were forced to collect their cornstalks to prevent the spread of the pest. In the search for a means of disposing of this waste, methods were discovered to convert it into paper, artificial silk, and synthetic lumber. From another product of the grain fields, oat hulls, recently has been extracted furfural, the oily liquid used in making synthetic resins.

### Sports by Lamplight

A GAME of midnight golf was played recently at Cleveland, O., on a miniature course illuminated by powerful electric lamps.

Workers who are kept indoors during most of the daylight hours may take advantage of the artificially-illuminated playground for evening sport.

Golf is not the only pastime that has been made possible at night by the electric lamp. Veteran marksmen, not long ago, met at Lynn, Mass., for an outdoor night trapshooting contest. Floodlights, totaling 2,000,000 candlepower, were used. So satisfactory was the man-made sunlight that some of the contestants broke as many as twenty-three out of twenty-five clay pigeons.

Anne Oakley, famous girl rider with the Buffalo Bill wild west shows, is said to have been one of the first to do fancy shooting under artificial light outdoors. At the evening performance of the circus, she would break glass balls thrown into the air as she dashed past on a broncho. A double row of arc lamps, equipped with burnished reflectors, provided the light.

In various parts of the country, football, baseball, and soccer fields, and tennis courts, are now provided with powerful electric lamps that make night playing





The thin metal window of the cathode ray tube, through which the rays pass to the outside air. It is absolutely hole-proof.

possible. The "ghost ball," a football painted white so that it could be seen in twilight scrimmages, has been superseded at many of the leading American universities by lighted stadiums.

### Cathode Rays Test Gems

**S**APPHIRES glow and tell the story of their origin through the latest application of cathode rays. Engineers of the General Electric Company, searching for a way to test the quality of the million and a half jewels they use each year as bearings in meters and other delicate electric instruments, were astonished recently to discover that the electric cathode ray tube devised by Dr. W. D. Coolidge of the same company offered a perfect test.

When a tray of artificial sapphires is placed under the rays, in a darkened chamber, the stones glow with a mysterious light, and continue to glow for a time after the rays are turned off. Natural sapphires, on the other hand, cease to glow as soon as the rays stop; in fact, one variety does not glow at all.

By this test and by the color of the radiance, engineers not only determine whether the gems are synthetic or natural, but can even name the factory that made the synthetic gems, or say where the natural ones were found.

"Should sapphires from Montana be mixed with stones from Australia, we could find this out with the cathode rays," said B. W. St. Clair, of the General Electric Company's standardizing laboratory at Lynn, Mass.

Three years ago Dr. Coolidge demonstrated the first modern generator of these extraordinary rays at the Franklin Institute, in Philadelphia. With a glass tube about three feet long, enlarged at one point into a spherical bulb, and an electric dynamo, he performed such feats as making a white mineral called calcite glow with orange radiance, turning acetylene gas into a mysterious yellow solid, killing insects, and destroying the tissue of a rabbit's ear.

Dr. Coolidge had not, as one report had it, discovered a new ray. But he had turned the feeble ray, discovered by the English physicist, Sir William Crookes, fifty years ago, into a formidable shaft of purple fire that worked marvels which engineers did not understand. He had re-




Testing the quality of rough sapphires by placing them, in a tray, beneath the window of a cathode ray tube.

leased rays of undreamed power by placing a window in one end of his tube—a sheet of nickel foil only a quarter as thick as a sheet of writing paper, that allowed the mysterious rays to stream through.

Engineers agree that the "cathode rays" are streams of flying electrons, or electrified particles of matter, very similar to one of the three kinds of radium rays. Hitting the outside air in a darkened room they produce a weird purple light that hangs about the end of a cathode tube. The rays kill insects and small animals. Probably they would kill a man if he stood long enough before them. Yet, Dr. Coolidge explains, his tube will probably not prove a "death ray" machine in time of war, because the highest electrical voltages will not project the rays more than a few feet.

At present the most powerful cathode ray tube in the world is a three-section affair built by Dr. Coolidge last year—really three tubes hooked together, to which is applied the tremendous electric pressure of 900,000 volts. Each of the three sections gives an added "kick" to the flying electrons, so that by the time they reach the end they are moving 175,000 miles a second, the fastest velocity

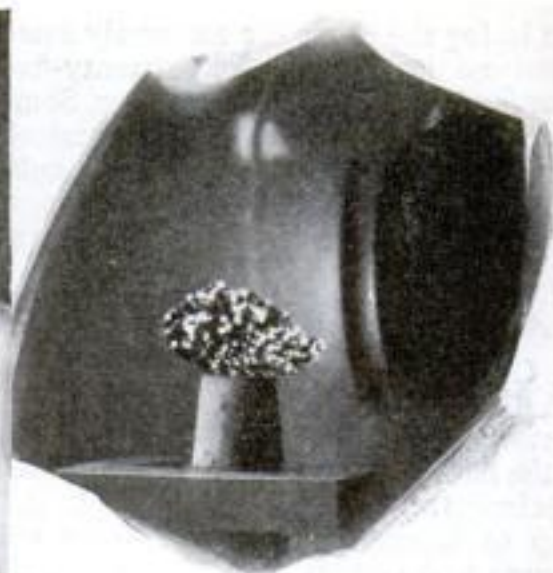

How a mineral glows with strange light when subjected to the cathode rays.

ever created by man. This is about 350,000 times faster than the speed of a bullet shot from an Army rifle. This tube's luminous glow extends six feet away.

Until recently the tubes were laboratory marvels with no known practical use. But not long ago, Prof. H. Plauson, of Hamburg, Germany, announced that with such a tube, he had made synthetic ammonia gas from the air, produced artificial rubber, and made alcohol from coal, air, and water. Prof. J. S. Long, of Lehigh University, discovered that the rays would dry paint with extraordinary rapidity.

### "Sunshine" in Yeast

**Y**EAST is now added to the list of foods that are treated with artificial sunshine from electric lamps. One cake is said to confer the same benefits a person might receive by spending two or three hours in the rays of the sun. The beneficial substance which yeast contains after the lamp treatment, "Vitamin D," is similar to that formed naturally in the human body by the sun's rays and the same as the healthful principle in cod liver oil.

Although the idea of thus taking sunshine by proxy is of comparatively recent origin, already a number of food manufacturers have installed lamps to treat their products. The idea is based upon the fact that the bone-building element, Vitamin D, if absent in a person's regular diet, can be supplied either by sun-bathing, by exposure to lamps that give a light approximating that of natural sunshine, or by eating food that has been treated with artificial sunshine.

Rays of ultra-violet light, found in the sun and in the radiations of certain types of electric lamps, are the principal agent in all three methods. Substances beneath the skin, and in foods as well, undergo a distinct chemical change beneath the rays. Ergosterol, a fatty substance, is changed into Vitamin D, and its health-giving power becomes manifest.

The discovery that eating sun-bathed food was as effective as natural or artificial sun-bathing dates from 1924, when Dr. Harry



Courtesy General Electric Company  
Dr. Harry Steenbeck, of the University of Wisconsin, discoverer of the efficacy of sun-bathed food, making a test with ultra-violet lamp.






The tower after completion of the third platform (at the top) in 1889. The intermediate platform is for changing elevators.



This view, taken in 1887 when work was begun on the Eiffel Tower, shows the massive masonry work used to support one of the four main pillars.



The last picture of Gustave Eiffel, shortly before his death in 1923 at the age of 91. At the left the young Eiffel is seen in his workroom, experimenting with aerodynamic balance to find the pressure of the tower against its caisson supports.

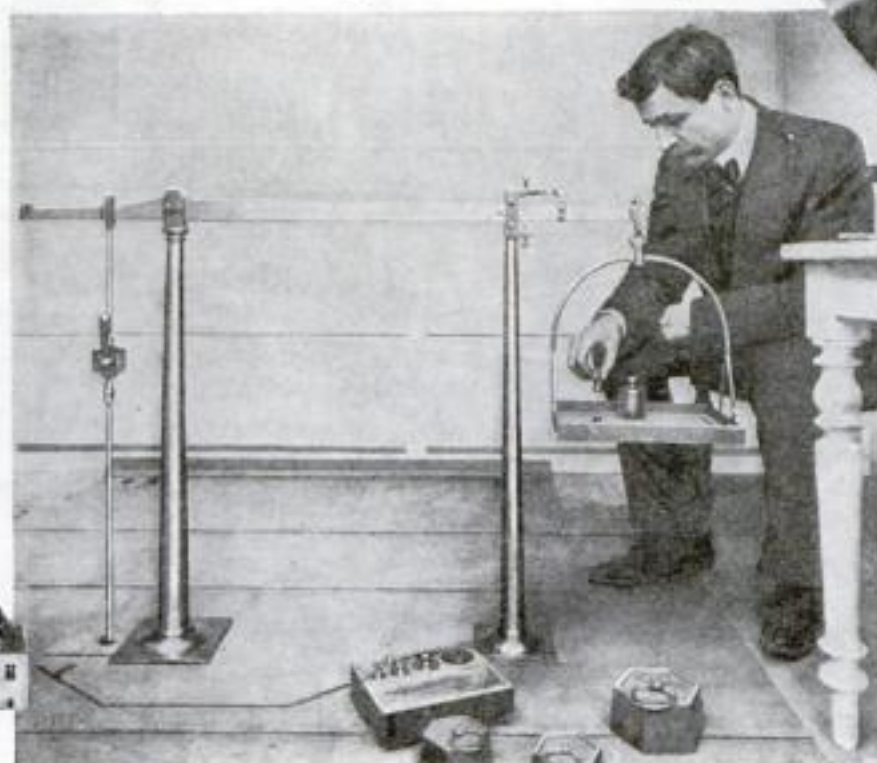

sion to operate it for twenty years, and at the end of that time turn over possession of it to the City of Paris.

Eiffel set to work on the biggest job he had ever tackled, undismayed by the gloomy predictions of other architects that the wind would surely blow down his tower. Forty

Steenbock, of the University of Wisconsin, fed irradiated cereals to rats kept in the dark and cured them of rickets.

In one typical process used by a cereal manufacturer, milled wheat passes on an endless belt beneath the vitalizing glow of a bank of mercury-vapor lamps with quartz, or rock-crystal, tubes. After preliminary steaming and sterilization, the grain is spread in a thin layer on the belt so that the rays can penetrate it thoroughly. After the lamp treatment the wheat is unchanged in appearance, but the brownish-white grains now contain the essential Vitamin D.

Addition of yeast to the present list of irradiated foods is another step forward in "bottling sunshine." Today a person who cannot go to the seashore or mountains may have the assurance of scientific experts that he may receive virtually the same benefits in his food.

### Tallest for Forty Years

A SIMPLE shaft of white stone about ten feet high, surmounted by a metal bust, was unveiled the other day on the park known as the Champ de Mars, in Paris. Graven upon it were the words, "Gustave Eiffel. 1832-1923." Thus France honors the memory of the man who dared undertake, in 1886, the construction on that site of the tallest structure ever built by man—the 984-foot tower that bears his name today.

Although it is by this great engineering feat that he is chiefly remembered, Eiffel had already to his credit a brilliant

career that fitted him for the task. He was only twenty-nine when, in 1861, he directed the construction of an important metal viaduct over the Garonne River at Bordeaux, France. In the years that followed he designed buildings and bridges, built the movable dome of the observatory at Nice, and constructed the framework for the Statue of Liberty in New York harbor. His reputation as an engineer was made when he designed the huge arch bridge over the Douro River at Porto, in Portugal. Its span of 520 feet was the greatest that had ever been attempted in a fixed railway bridge. He followed this exploit in 1879 with an even greater one, the Garabit bridge, the 536-foot span of which crosses a valley more than 400 feet above the Tuvre River, in southern France.

Meanwhile, American engineers had suggested the erection of a 1,000-foot tower at Philadelphia for the exposition held there in 1874. Their plan fell through. In 1881 a Frenchman named Sebillot proposed to build in Paris such a tower, to be constructed of masonry and to be surmounted by an electric plant to light the entire city. His proposal was rejected, on the ground that a tower of such height could not be built safely of masonry.


The government, however, favored building a sky-piercing tower for the exposition of 1889, to be held in Paris, and invited architects to submit plans. Eiffel's proposal in 1886 to build one entirely of steel was accepted. It was stipulated that he should build the tower under a government subsidy, retain the conces-

draftsmen and calculators worked for two years studying the 15,000 separate pieces that were to go into the structure. They used up 5,000 sheets of yard-square drawing paper. Each of the 15,000 pieces required a separate drawing, showing in particular the position of rivet holes with an accuracy of one-fiftieth of an inch. The rivet holes, numbering 2,500,000 in all, were thus bored in advance in the workshop where the steel members were constructed to size, and when the pieces were assembled they fitted perfectly.

On a foundation of more than 15,000 cubic yards of masonry the skeleton structure of steel began to take shape. On March 31, 1889, a little more than two years after work had started, a French flag hauled to the top proclaimed that the mighty 7,700-ton structure was finished. Eiffel had accomplished the "impossible."

Scientists were not slow to find the dome at the 984-foot summit an ideal weather observatory, and meteorological instruments installed there today record faithfully temperature, wind, and moisture conditions far above the street. At times the tower has been used for such varied scientific purposes as the study of the changing amount of electricity in the air from day to day; experiments on the speed of falling bodies meeting with air resistance; the first unsuccessful experiments in wireless telegraphy between the tower and a near-by building in Paris; the study of the sun's light conducted by M. J. Janssen, noted astronomer; and even a study of the physiological effects upon human beings ascending the tower.



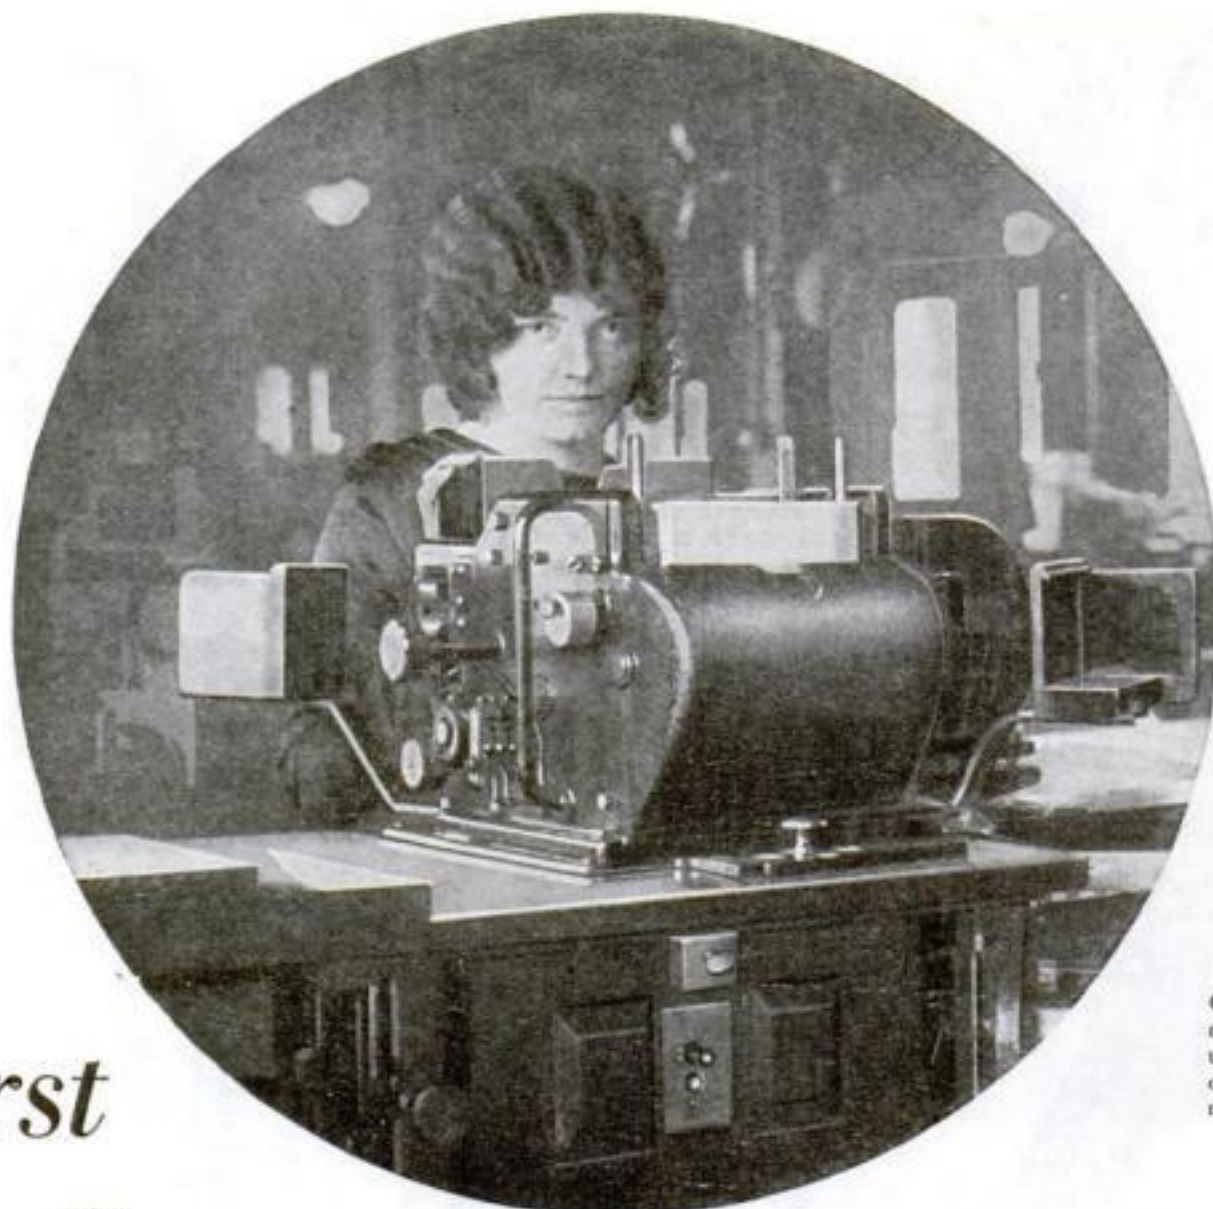

Counting noses. This remarkable machine automatically tabulates the information on census cards after they have been sorted mechanically into various groups.

*First*

# Scientific Census Will Put America Under the Microscope

By ALFRED P. RECK

**W**ITH the taking, next year, of the fifteenth decennial census of the population of the United States the Government will tackle the greatest piece of scientific research work along statistical lines ever undertaken.

Since the first census was collected in 1790, the gathering of information every ten years has been concerned mainly with the number of citizens, their national, racial and religious antecedents, and their occupations.

But now the scope of the already enormous task has been vastly extended. In the comprehensive census of 1930, the country will be combed also for data relating to commercial distribution, unemployment, agriculture, manufacture, and many other phases of the national life. Not only will the latest scientific equipment be employed in the survey, but the methods to be pursued will be those suggested by experts in scientific research.

The results of this gigantic study are bound to shape the future activities of the United States and to influence the lives of every man, woman, and child. Not only will the figures gathered by the Census Bureau be used as a guide for

future legislation regulating immigration, naturalization, sanitation, and other subjects, but they may also revolutionize business and industrial methods, especially those of production and marketing, and may even form the basis for new military plans.

The machinery to be used in compiling this tremendous mass of facts represents the last word in scientific ingenuity. Robots, operating with almost human intelligence and with greater speed and accuracy than any human, will play an indispensable part. They will do virtually all of the chores except to ask questions of the citizens and check up on vital facts. Without them it would take tens of thousands of persons at least ten years—or until a new census would have to be collected—to assemble and pigeonhole the data.


Of greatest importance to the business and industrial world will be a survey of commercial distribution in the 1930 census. America's system of distributing commodities has been operating blindly. Manufacturers and commercial houses have been largely guessing about established and prospective markets. The result, Department of Commerce officials estimate, has been an annual waste run-

ning into billions of dollars. With distribution census figures available, manufacturers and merchants will no longer need to grope in the dark, but can map out their sales campaigns on the basis of figures showing actual conditions.

In 1927, the Department of Commerce, in cooperation with the U. S. Chamber of Commerce, conducted an experimental distribution census in eleven important cities—Baltimore, Md.; Syracuse, N. Y.; Providence, R. I.; Atlanta, Ga.; Chicago, Ill.; Fargo, N. D.; Springfield, Ill.; Kansas City, Mo.; Denver, Col.; Seattle, Wash.; and San Francisco, Calif. The sample was sufficiently large to be significant, for the cities had an aggregate population of more than 6,750,000 and did a total retail business of \$4,000,000,000, or about ten percent of the estimated retail trade of the entire United States.

**T**HE results of the survey rudely upset some of the cherished business principles and beliefs of manufacturers. The eleven cities were shown to have 90,000 retail stores. Of this number, forty-seven percent reported less than \$10,000 gross sales a year. And half of the forty-seven percent averaged only \$83 a week. These findings showed manufacturers for the



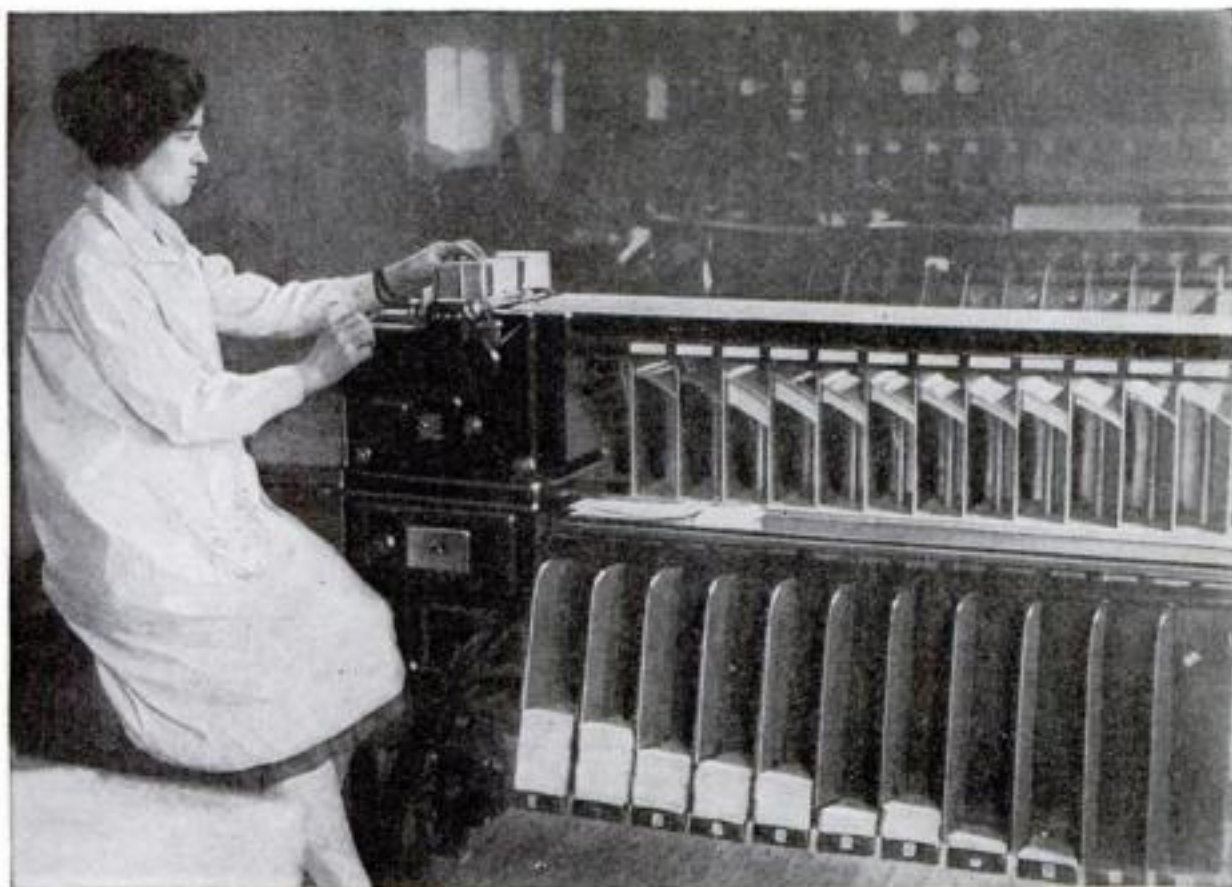

When specific information, such as nationality or occupation, is desired of a given population group, the census cards are put through this automatic machine which proceeds to sort them accordingly.

first time that they could not afford to pay salaries and expenses to salesmen calling on retail stores with such a small volume of business. The wealth of facts and figures resulting from this study pointed with amazing clarity to good and bad markets.

The 1930 distribution census for the entire country unquestionably will do the same, bringing drastic changes in the present system of distribution. Old markets may be discarded and new ones opened.

Moreover, for the first time in history, the federal Government will attempt to make an accurate check on the number of persons without work. During the last presidential campaign, unemployment figures varied according to the political beliefs of the person presenting them. Some said the number was as high as 4,000,000; others put the figure at only 1,000,000. Apparently, no one really knew. Now, the Census Bureau, at the instigation of Congress, is going to find out. The result may mean important legislation or increased activity in public building programs.

The census of agriculture will require the counting of some 6,500,000 farms. The farmer will be asked for facts and figures as to acreage planted, crops and crop conditions, livestock, ownership of land, use of modern machinery, methods of increasing production, his opportunities for recreation and rest, his health, whether his house is furnished with telephone, electric light, and radio, whether he has an automobile, and whether his house is piped for water. In all, each farmer will be asked more than 300 questions.

In 1920, there were 246,000 tractors in use on farms; five years later, 586,000 were reported, an increase of 138 percent.

The 1925 agriculture census showed 284,000 radio sets on farms. This figure undoubtedly will be more than doubled in the 1930 census.

On the 6,500,000 farms in the United States live from 26,000,000 to 28,000,000 people, about one fourth of the nation's population. The economic status of this great body of people who labor to feed the country is of vital concern, and in this connection it is the purpose of the agriculture census to determine facts which will aid in benefiting the farmers.



The operator of this hand punching machine translates written data into holes punched in cards.



Automatic gang punching machine does the work of five hand punchers, handling 600 cards a minute.

The census of manufactures will cover production for 1929. The Bureau will try to learn just how much of every known product, from airplanes to aprons, and from pianos to piccolos, were manufactured. It will also determine output per wage earner, wages paid, increase in use of power-driven machinery and in combined horsepower in the nation's factories, as well as many related facts.

The new mechanical equipment acquired by the Government will immeasurably lighten the labor of classifying the harvest to be brought into Washington, D. C., by the census takers. Even so, an office force of about 6,000 employees will be busy for three years or more at the work of tabulation, while 100,000 field men will be required to interview the inhabitants of every part of the country.

At the Census Bureau, expert mechanics have been preparing the intricate machines that will start humming after the New Year. Among them is a new automatic "gang puncher," which takes the place of five hand-punching operators in preparing the census cards for tabulation. Completing four jobs at one time, it handles the cards containing census information at the rate of 600 a minute. Twelve of these machines are being built by the Bureau's mechanical force. In addition, eleven high-speed sorters will work in connection with twenty-six that were used in the 1920 count. The new sorters handle the cards at the rate of 370 a minute—about seventy a minute faster than the old type. Then there are ten new tabulators, to be used with twenty-eight previously in operation.

With this expensive equipment, not to mention the enormous pay roll, it is small wonder that the 1930 census is going to cost the people of the United States a "pretty penny." It is calculated that the three-year job will cost, in all, about \$39,000,000. This means that each citizen will pay indirectly, in the form of taxes, an average of a little more than thirty cents for the census.

The expense of taking a census has greatly increased through the years. The fourteenth census, in 1920, which showed that the United States had a population of 105,710,620, cost \$25,117,000. It was in 1850 that the cost first mounted above \$1,000,000. Ten years previously, the expense of counting America's 17,069,453 inhabitants had been \$833,370. And the first census ever taken, that of 1790, when the United States had a population of less than 4,000,000, cost a mere \$44,377.28.

The involved census-taking procedure, reduced to its simplest terms, may be explained as follows:


When John Smith tells a field worker that he is a farmer, married, a native of the State of Kansas, white and fifty years old, the information is transcribed on a written form. This is sent to the Census Bureau in Washington. Here, John Smith loses his individuality and becomes a cardboard slip, six inches long and three inches wide, dis- (Continued on page 160)



# New Air Records and Inventions



In an unusual parachute jumping spectacle, six men leaped from three bombing planes at the same time, above Hendon air field, near London, England. The camera clicked as the parachutes opened—two from each plane. All landed safely.

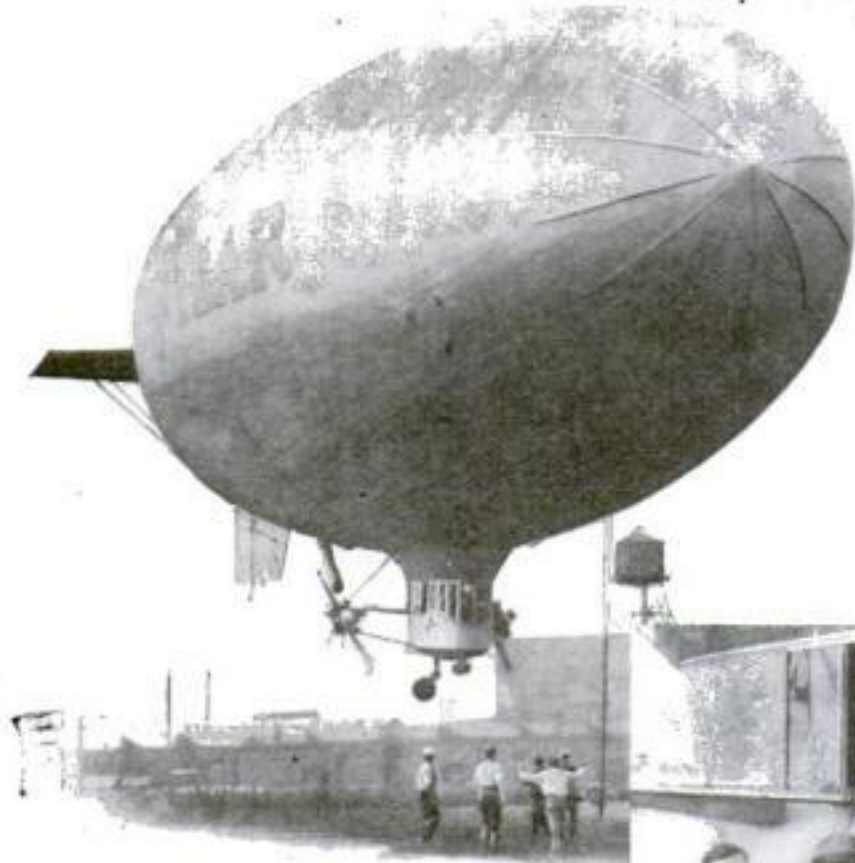

First classroom dirigible—the *Mayflower*, new nonrigid ship built by the Goodyear-Zeppelin Corporation, arrives at the Massachusetts Institute of Technology, Cambridge, Mass., to be used in experiments in aerial navigation in fog and radio communication.


Right: Accepting the *Mayflower*, Dr. Stratton, president of the Massachusetts Institute of Technology (standing in foreground), shakes hands with Paul W. Litchfield, president of Goodyear company.



This new aviation beacon, called the largest in the world, has been installed at the Municipal Airport, Long Beach, Calif. Light from its neon tubes is visible to flyers seventy-five miles away. A flashing device signals to pilots, in code, the airport's location.



What most spectators never see—a glimpse behind the "dock" at the Naval Air Station, Lakehurst, N. J., America's port for the biggest dirigibles. Whenever an airship lands or departs, as on the trips of the *Los Angeles* and *Graf Zeppelin*, picked men of the station's landing crew are called upon to make elaborate preparations. In this picture they are getting the ropes ready for the job of docking a dirigible at the end of one of its long trips.

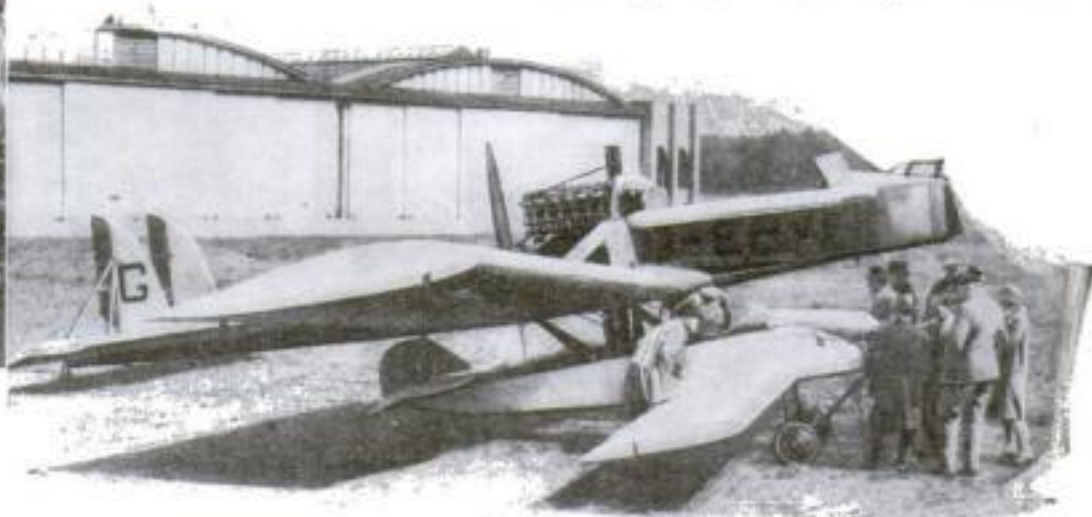

Two British planes of the latest design offer a strange contrast in size. Under the right wing of the larger craft, is seen nestling one of the smallest airplanes that has ever been built—so small, in fact that it has been termed a "motorcycle of the air." An unusual feature of the large ship is the passenger cockpit in front of the engine.



# Shattering the World's Duration Mark—Improved Weapons for Aerial Warfare—Planning a High-Flying Ocean Plane—Marvels of Night Photography—Latest Feats of Motorless Flight

**T**HE once imaginary spectacle of a man getting into an airplane, saying to those on the field, "I'll be down two weeks from next Tuesday," and soaring aloft is today a reality. Of late, one endurance record after another has been shattered, culminating, at this writing, in a mark of seventeen and one-half days in the air.

In seven months previous to this record, four crews of American aviators, in as many different planes, had taken turns at boosting what is now recognized officially as the "world's duration record while refueling in the air." Before that it had been held by Belgium, where, late in 1927, two pilots had flown for ninety hours while receiving through a hose fuel supplies from another plane.

Early this year five United States Army aviators in the tri-motored plane *Question Mark* flew for more than 150 hours over Los Angeles, Calif. Five months later R. L. Robbins and James Kelly, two comparatively inexperienced pilots, flew a second-hand monoplane for 172 hours over Fort Worth, Texas. The record kept growing. Byron K. Newcomb and Roy L. Mitchell extended it to 174 hours at Cleveland, O. and Loren W. Mendell and Roland B. Reinhardt raised it again at Culver City, Calif. to 246 hours—ten days and a quarter—in the air. Now Dale Jackson and Forrest O'Brine, at St. Louis, Mo., have just given an astonishing exhibition of human and mechanical endurance by flying for 420 hours. Even as this is written, others are in the air to attempt to beat them.

## Anchorage for Seadrome

**H**ALFWAY between New York and Bermuda, a submerged plateau that rises far above the rest of the ocean floor is expected to aid in establishing a floating island for sea-voyaging planes. This plateau, mapped recently by a Navy survey, will make it possible to use anchor cables of reasonably short length to keep the artificial island from drifting.

Actual experiments are planned for next spring in the use of the seadrome, invented by Edward R. Armstrong, Delaware engineer. It is to be a veritable floating landing field in mid-ocean for New York-to-Bermuda planes. Steel work for the platform is being constructed at Chester, Pa., and the island is to be assembled by a shipbuilding concern at Cape May, N. J. Three-mile cables will

terminate in mushroom anchors to keep it from drifting. Should the experiments prove successful, other seadromes may be built for transatlantic air lines.

## To Berlin in Six Hours?

**A** HIGH-FLYING airplane that might fly, at an altitude of eight miles, between Berlin and New York in six hours is the invention claimed by H. G. Perl, young German engineer. Shaped like a Zeppelin, the duralumin machine would have a passenger cabin in which a pump would maintain normal air pressure and make comfortable breathing possible in the thin upper air.

At such a height, owing to the lack of air resistance, Perl calculates that his machine should be able to attain a speed of 650 to 750 miles an hour. Its wings

dead engine before landing, giving him sufficient time to locate a nearby ship by radio, and distance enough to land alongside it. Perhaps eventually the present airplane altitude record of 42,000 feet made by the oxygen-breathing German, Neunhofer, will become a regular airplane height for long-distance flights of passenger aircraft.

## A Camera "Machine Gun"

**A** MACHINE gun that shoots pictures instead of bullets is the newest in military air training. The instrument resembles a standard machine gun in appearance, size and weight; but when the trigger is pressed the "gun" fires no bullet. Instead, it takes a small photograph that shows just where the bullet would have struck on an enemy plane.

Armed with these weapons, airmen may go aloft and engage in a mimic battle. Through an automatic device, the resulting pictures bear an imprint showing the exact time at which each was taken. Thus the winner of a "battle," the one who first hit a vulnerable spot of the other plane, may be determined.

## Wind Vane for Night Flyers

**A** NIGHT wind vane that flashes the direction of the breeze in electric lights to incoming pilots is the invention of R. C. Jackson, Oakland, Cal-

if., electrical engineer. In the exact center of the airport is arranged a group of glass-covered trenches radiating outward like the spokes of a wheel, each containing electric lights. These are connected by electric wire to an ordinary wind vane on the field and are so arranged that when the vane points north, only the north-pointing trench on the ground is illuminated. As the vane turns, other trenches instead flash into brilliance.

Since a pilot should know the wind direction to make a good landing, the device may prove a boon to night flyers.

## Sharpshooting with Bombs

**A** NEW bomb-aiming device that enables an airplane flying 1,500 feet high to drop a 100-pound bomb down the smokestack of an enemy battleship has just been purchased by the United States War Department. Army officials say that such a projectile would do as



One of the new American transport planes, the twin-motor twenty-passenger Curtiss Condor, on a recent trial flight over Long Island, N. Y. With each motor developing 635 horsepower, it is capable of a speed of 130 miles an hour. It is equipped with radio.

would be shaped like those of a flying fish, and there would be small fins on the tail. An internal combustion engine of only eighty-five horsepower would drive the craft, its hot exhaust furnishing cabin warmth in the Arctic cold of the high altitudes. A patent has just been granted Perl on his invention, and he promises that within four months he will have such a machine ready for a trial flight.

Although there is no guarantee that Perl will succeed in his experiment, the idea of superspeed airplanes flying at great heights has been endorsed by many experts as feasible in theory. It is well known that at eight to fifteen miles above the earth a pilot could laugh at rain, fog, sleet, and electric storms; they never reach such heights. Instead of erratic winds, regular rapid wind currents are believed to exist at various upper levels. These a high-flyer might use to advantage by rising into a favoring current. In the event of a forced landing at sea, he might be able to glide 300 miles with a



much damage as a two-ton charge dropped on the ship's deck from a bombing plane, since the smaller projectile would explode in the ship's most vital part.

The device that aims bombs with such astounding accuracy is said to be "as intricate as a chain of Swiss watches." It is a bomb sight that takes into account the speed of airplane and ship, the movement of the air, and "air pockets." Several are to be manufactured immediately, at a cost of \$28,000 each. The invention is believed to be the first of its kind in the world.

### Parachutes Tested by Monkeys

NOT human beings, but monkeys, risk their lives to try out new types of parachutes in Japan. According to George M. Lord, traffic official of a western United States air line, the animals are trained to pull the ripcord that opens the parachute and are then tossed from an airplane in full flight. If the monkey lands safely, the parachute is considered safe for human use.

Frequent casualties among the monkeys attest the wisdom of this procedure. Dummies could not be used, for the cord that unfurls the parachute must be pulled during the descent.

### Aerial Photos by Night

A DEMONSTRATION of the United States Army Air Corps' latest wonder, night photographs taken by flashlight from the air, recently created a war scare among the natives of Panama. Powerful charges of flashlight powder exploded in the air, and their blinding flashes convinced the populace that an enemy was dropping bombs; even Army officials on the ground, not notified of the tests, were alarmed. Actually Dr. S. M. Burka, of the Air Corps' Materiel Division, had obtained excellent photographs of the Canal Zone area.

Taking a flashlight photo of a city from the air is not a new idea. Important experiments along this line were commenced at Dayton, O., and Rochester, N. Y., nearly four years ago by the Army Engineering Division. Only recently, however, has the process been so perfected as to make it possible for newspapers to obtain photographs of flood or storm disasters without waiting for daylight, or for military strategists to have before them in a few minutes night photos of the enemy's movements snapped from speeding planes. Brave men risked their lives to make the feat possible.

One night during the first weeks of the tests, Lieutenant George W. Goddard, United States Air Corps—inventor of the first aerial flashlight apparatus—took the air with Dr. Burka in an observation plane over Rochester, N. Y. Fastened beneath the fuselage was a sort of aerial torpedo, a glider to be released in flight and towed at the end of a long cable. It

was filled to the brim with flashlight powder—sixty pounds of high explosive. The signal was given, the torpedo released. Then, with about fifty feet of cable out, the mechanism jammed. It was impossible either to pay out more cable or to cut the deadly trailer loose. Just as the two men were preparing to jump for their lives the glider swooped past the tail of the plane, broke loose, and dived to earth without exploding—much



With passenger planes taking off rain or shine, an innovation at the Grand Central Air Terminal, Glendale, Calif., is this inclosed corridor of steel, leading from the terminal waiting room to the outgoing plane. The last third of the tunnel telescopes in or out to reach the doorway of the plane.

to the surprise and relief of them both.

On another occasion Goddard was not so lucky. By this time, free-dropping flashlight bombs had been substituted for powder-filled gliders. With four other men, Goddard made a night flight over Dayton to try out the new plan. The camera was made ready, and a flashlight bomb released. Something apparently went wrong with the time fuse, for the bomb was only fifteen feet beneath the tail of the plane when it exploded prematurely. For an instant the plane stood on one wing, veering crazily. Its occupants were stunned into semi-consciousness. Then the pilot, Lieutenant Gene Batten, regained his senses and attempted to right it. Although the controls were jammed, he managed an emergency landing. All escaped with their lives by a miracle. The entire rear floor of the fuselage was torn away, the tail twisted, and wood members in the nose and wings were shattered.

Today the process has been so perfected that an excellent flashlight photo of Fort Leavenworth Prison, Kansas, taken from a low-flying plane at 9:48 p.m., was developed, printed, and rushed by telephoto to military officials at Chicago, New York, and San Francisco, reaching the last city at 10:30—less than an hour after the camera shutter had clicked. Other pictures have been taken of Rochester and of Dayton in which even automobiles parked on the streets are clearly visible.

### Women Aces Recognized

THE flying achievements of women assume new importance with the announcement that the Fédération Aéronautique Internationale, world governing body in aeronautics, has decided to

recognize and classify them as separate records. The decision ends a long battle by women flyers to obtain official sanction for their feats. It will automatically award to Americans the feminine world records for endurance, altitude, and speed, on the basis of their past performances. The expected recipients are, at this writing, Miss Elinor Smith with her endurance record of twenty-six hours; and Mrs. Louise McPhetridge Thaden, who piloted a plane at 156 miles an hour and on another occasion soared to a height of 20,270 feet.

On another page are pictured some of the women who have achieved prominence in the air. All have demonstrated a degree of flying skill of which any man might be proud. Yet not many years ago the spectacle of a woman taking to wings was considered extraordinary. Only a few daring pioneers paved the way for later triumphs of their sex. A Flemish girl, Mlle. P. van Pottelsberghe of Ghent, riding beside Henry Farman in his old Voisin biplane as early as 1908, won the distinction of being the first woman to fly. But it remained for the Baroness

Raymonde de Laroche, French sports-woman and automobilist, to be the first woman to pilot a plane. After a few weeks of lessons, in the fall of 1909, she took her Voisin plane into the air at Mourmelon. She participated in an air contest in Egypt in February, 1910, in which, it was announced, the aviators would "fly around the Sphinx, if possible," and her twelve-mile flight won her a pilot's license from the Aero Club of France. Meanwhile an Irish girl, Miss Lillian S. Bland, constructed a flying machine entirely by herself.

Among the first women in the United States to pilot planes were Miss Harriet Quimby, a magazine writer, who, in 1912, was the first woman to fly the English Channel; Miss Katherine Stinson, called the first woman stunt flyer in the United States, who taught her famous brother, "Eddie," to fly; and Ruth Law, who made the first loop-the-loop in 1915.

### Two New Glider Records

SOARING nearly two miles above the earth with no motor to aid him, Robert Kronfeld, Vienna glider pilot, recently set a new world's record for altitude in a motorless plane at Gersfeld, Germany. His mark of 9,780 feet exceeded by more than half a mile the previous record of Max Kegel, a German glider expert.

Another world's record went to Kronfeld when he glided across country for a distance mark of 102 miles.

Recently the art of gliding has been improved by what is known, as "cloud flying." Formerly pilots kept their gliders aloft by taking advantage of rising currents of air along hillsides, but now the rising air streams beneath cumulus clouds are also utilized.



# Women Flyers Who Have Made Their Mark



Two famous ocean flyers—Ruth Elder (left) and Amelia Earhart. Miss Elder now is engaged in motion pictures and Miss Earhart is encouraging women to enter aviation.



Elinor Smith, U. S. endurance record holder. Above: Gladys O'Donnell.



Bobbie Trout, the only woman who holds the job of chief test pilot, and formerly holder of solo endurance flight record.



Mrs. Mary C. Alexander, mother of two grown children, who is learning to fly at the Roosevelt Flying School, N. Y. She is planning to sell airplanes in her home state of Virginia.



Marjorie Crawford, who is making plans to beat the women's endurance record of Elinor Smith, has been flying since she was fifteen.



Marvel Crosson, once holder of the women's altitude flying record, who was killed when her plane crashed in Arizona during the women's air derby. She had been flying since 1923, and was a skilled pilot.



Ruth Nichols, New York society girl and airplane pilot. As an aviation company executive she has made a notable success of commercial aviation. At this writing she is on a 12,000-mile tour to organize aviation country clubs.



They call Florence Lowe Barnes (at left) California's "Tomboy of the Air." She is the high-flying wife of a clergyman.



Lady Mary Heath (with flowers), England's famous woman flyer, and first to fly the length of Africa, nonchalantly talking over plans for the First National Women's Air Derby with Sarah Warrender.



# New Gale Machine Tests Planes

A HURRICANE that could knock a man flat will soon rush through a tube ten feet in diameter, which, when completed soon at Pasadena, Calif., will form one of the finest aeronautical wind tunnels in the world. Within it a set of vanes that looks vaguely like a giant automobile radiator will control a man-made gale of 120 miles an hour, produced by a four-bladed propeller with a streamlined electric motor. Experts of the Daniel Guggenheim School of Aeronautics at the California Institute of Technology will use the outfit to try out new plane designs before the planes are actually flown.

Testing inexpensive models of new airplanes instead of the planes themselves, to see whether they will fly, is a development made possible by the wind tunnel, and dozens of them are in use in the United States today. To build a two or three-foot model of a flying machine of radically new design may cost from \$100 to \$1,000. Artificial air currents in a wind tunnel then speedily reveal its faults and merits—whether it is tail-heavy, likely to spin, or safe for the novice to fly. Wires that suspend the model in the tunnel, attached to sensitive balances, record the forces acting on the plane when the air blast blows against it, giving the same effect as if a real plane were moving forward in the air. Thus, when a manufacturer has a new idea for a plane, he can try it out without spending tens or hundreds of thousands of dollars to build it, and risking one of his test pilot's lives to fly it.

Automobiles, as well as airplanes, are improved by wind tunnel tests, and even battle-ships have been tried out for streamlining in this way. The



Instruments which record velocity of the air stream in the new ten-foot wind tunnel at the California Institute of Technology. Dr. Arthur L. Klein, head of the aeronautical research staff, is at right.

average automobile, at a speed of thirty miles an hour, expends about four horsepower to overcome air resistance alone. Since this may be reduced by streamlining, wind tunnel tests on car designs have been carried out extensively in Europe where the high price of gasoline enforces economy of fuel. In the airplane industry the tunnels are of service not only in developing improved commercial models



of planes, but also in experiments to improve the airplane accessories.

Recently the National Advisory Committee for Aeronautics announced what was hailed as the greatest single contribution to airplane efficiency since the war—a curious bowl-shaped cowl that fitted over the front of a plane's air-cooled engine and, by decreasing wind resistance, boosted the speed of a plane by as much as twenty miles an hour. This invention was born in the Committee's giant twenty-foot wind tunnel at Langley Field, Va., built at a cost of \$150,000.

Here, where gales of 110 miles an hour could be produced at will, full-sized motors with their


different cowlings were mounted in turn on a cabin fuselage and set up at the mouth of the tunnel. Engineers measured the power of the motors with a dynamometer, a thrust-measuring instrument, and checked the temperature of the cylinders with thermocouples, high-temperature electric thermometers, to be sure that the engines were properly cooled. They were surprised to discover that a cowl almost completely covering the motor—a design hardly considered before—reduced the wind drag more than twice as much as the best conventional one. Since this discovery, planes using the cowl have set new speed records for non-stop flights across the United States.

The Wright brothers devised and used a wind tunnel to test models of the world's first successful airplane, and since that time their use has been extended to all leading aeronautical laboratories.

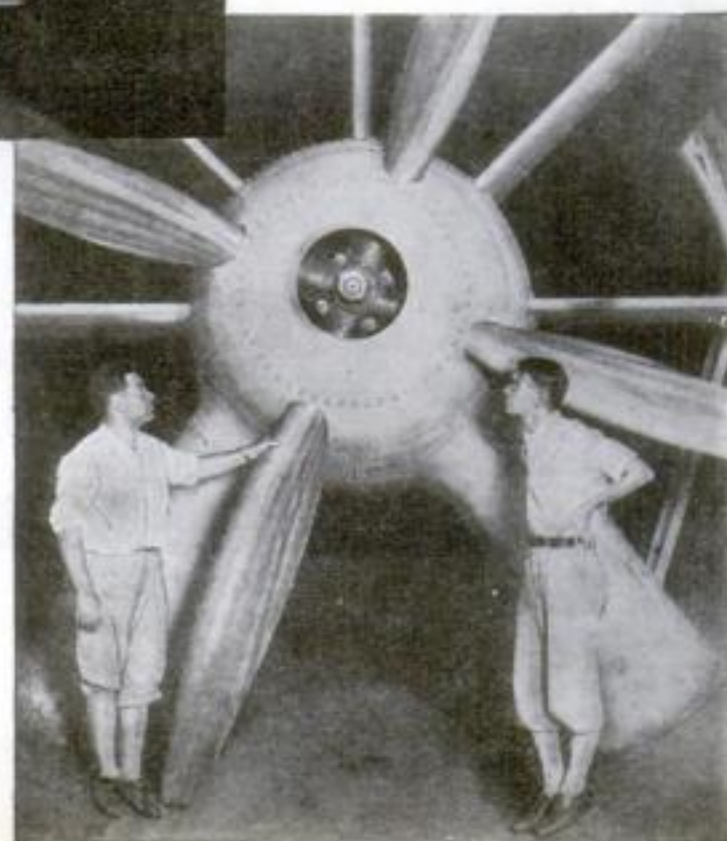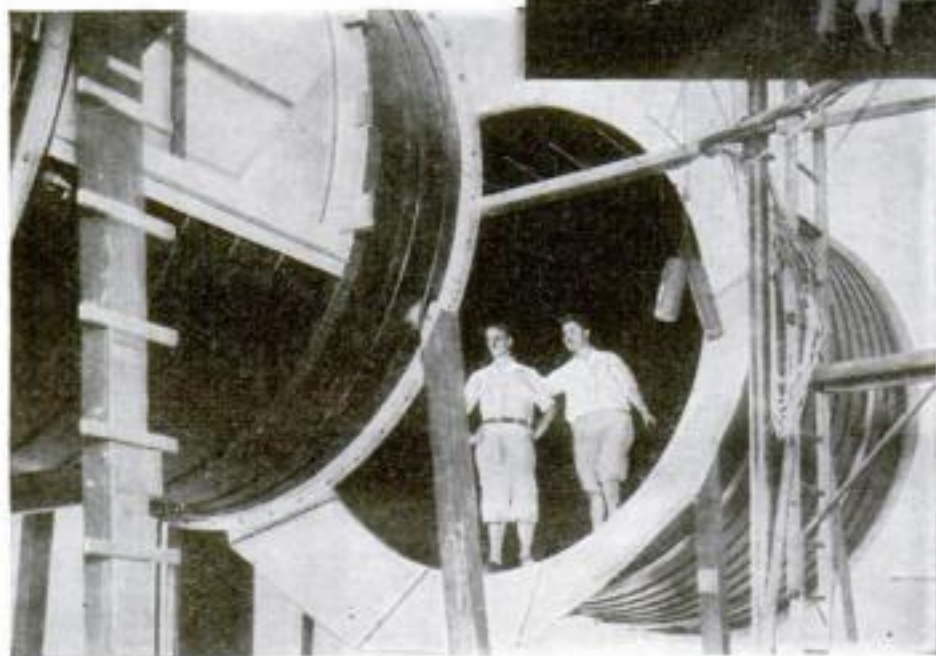

Building the new wind tunnel. Its great size is revealed by comparison with the men standing within it. Top: The enormous set of vanes controlling the 120-mile gale. Right: The four-bladed propeller that makes the hurricane, in which models of newly designed machines are put to exhaustive tests.



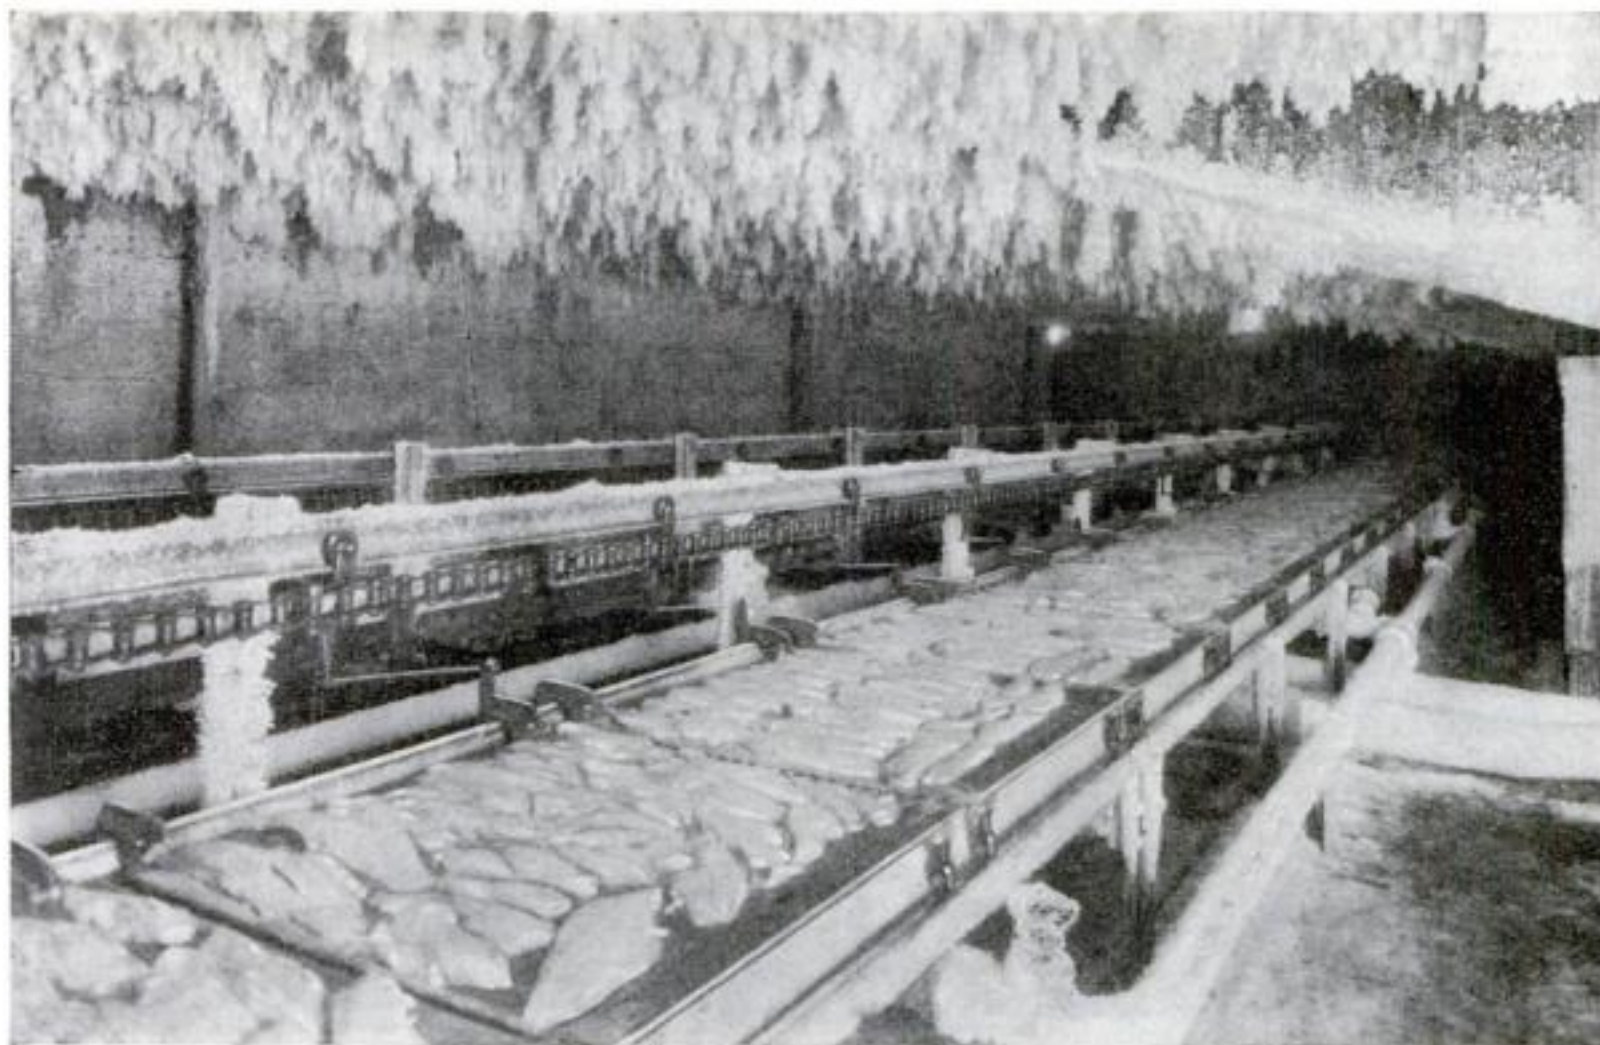

One of the machines for freezing fish quickly to preserve their freshness. The boned or "filleted" fish, placed on great trays, are carried over freezing brine.

# *Fish Kept Fresh* *1,500 Miles from Sea by* **New Scientific Refrigeration**

By ROBERT E. MARTIN

**A**ND a package of haddock," a Kansas housewife tells her grocer. He hands her a sealed box, faintly cool to the touch. In the kitchen, she drops its contents in a frying pan. It is a fish fresh from Atlantic waters, now for the first time available to her through a new process of quick freezing. Frost still covers it after its 1,500-mile journey by refrigerator car and fast motor truck.

Last year more than 30,000 tons of fish were placed in trade-marked packages and sold like any grocery. Much of this was frozen, enough to make it the first successful tryout of the quick-freezing process which other industries likewise are exploiting in new commercial applications. Sausages and clams, frozen through and through, reach distant destinations with the same wholesome, appetizing flavor they had at the start. Even rabbit meat, roasting ducks, and sirloin steaks have appeared, quick-frozen, in package form.

Only a revolution in the "cold storage" methods of

shipping could have made such long-distance shipments seem possible. That revolution is taking place. There is the recent discovery of a way to freeze meats and fish without impairing their food value. Within the last few months has come the invention of a refrigerator freight car that maintains automatically,

in its iceless insides, the temperature of a howling January gale for uninterrupted hours. Motor trucks with efficient built-in refrigerators, sub-zero cabinets for retail stores, and refrigerated packages for mail delivery complete the new system of transporting "perishable" food in a preserved condition.

All this is so new that even the men responsible for keeping Americans' tables stocked with fresh food all the year around are only beginning to realize what it means to them. It may make a lot of difference in the way that they handle the 3,600,000,000 pounds of food that goes into cold storage in the United States during the peak months—enough to feed one American family for the next 800,000 years. The eggs in cold storage, alone, make such an imposing total that it would take a single hen 36,000,000 years to lay them all. The supply of stored fish is so great that a fisherman would have to work 1,500 years to catch them all, even if he could



An expert of the Department of Agriculture determining the freezing point of a potato. He found that the vegetable freezes at about 28 degrees F.



average ten fifteen-pounders a day. To keep this enormous mass of food fit and fresh from the time it is placed in cold storage until it reaches the dinner table is a difficult engineering problem of the first order.

**“QUICK-FREEZING”** has made possible the delivery of fresh fish in packages. It is the recently-developed science of freezing animal tissues without injury or loss of their juices. Other ways of freezing fish had been tried, but they were failures. Until fish were first kept on ice in 1825, virtually no new method of preserving them had been used since the salt treatment of Biblical times. The Pilgrim Fathers, when they landed in Massachusetts, were still using salt. Some of their descendants continue to do so. The first serious experiments in freezing fish commenced hardly more than thirty years ago, when iceless refrigerating plants first began using ammonia to produce a colder cold than ice. The results were unsatisfactory. Frozen fish dried out, lost weight, turned yellow or sour.

Dr. Harden F. Taylor, appointed by the late President Wilson to the United States Bureau of Fisheries to find ways of increasing food supply, set out to find the reason. He discovered it under the microscope. Large, jagged ice crystals had punctured the flesh of the frozen fish.

The flavor and nutritive substances in the cells had leaked out, allowing the entrance of bacteria that would spoil the fish.

The large ice crystals were formed during the two or three days that it took to freeze the fish. Would quick freezing produce ice crystals so small that they wouldn't puncture the flesh of a fish?


Dr. Taylor exposed some haddock to a temperature of forty degrees below zero. In less than an hour it was solid ice. Carefully he shaved off a delicate sliver of flesh and placed it under a microscope. Tiny ice crystals told him he had been successful.

**NOW** for a practical try-out. The haddock were quick-frozen, dipped in a pan of water to give them a protective shell of ice, and placed in storage. Six months passed. Then the haddock were removed and thawed out.


“We looked at their cells,” says Dr. Taylor. “Almost perfect! We weighed them to see how much moisture had escaped. Practically none! We cooked and ate some of the fish. Delicious!”

Today the idea of congealing fish almost instantaneously to preserve them with tiny ice crystals is applied commercially in factories that dot the Atlantic coast from Nova Scotia to Florida. One such plant, at Halifax, N. S., freezes a ton of fish every two hours.

Just like the big ice trays from a household automatic refrigerator—one of the new methods of quick freezing.

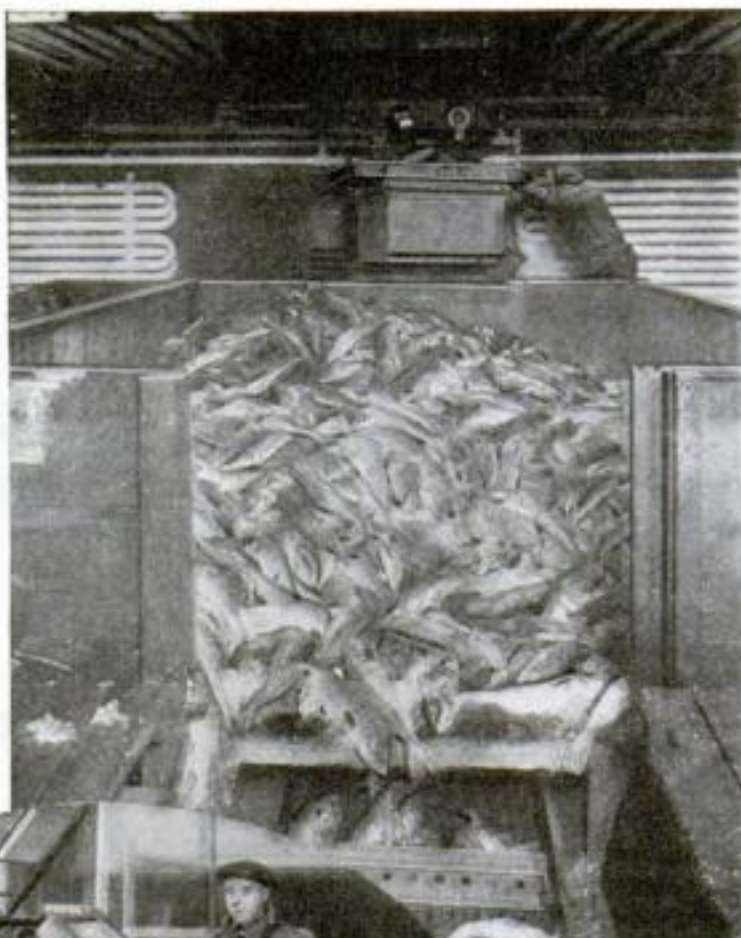

These fish will be cleaned, filleted, frozen, and shipped thousands of miles, and will arrive at their destinations as fresh as when they started out.

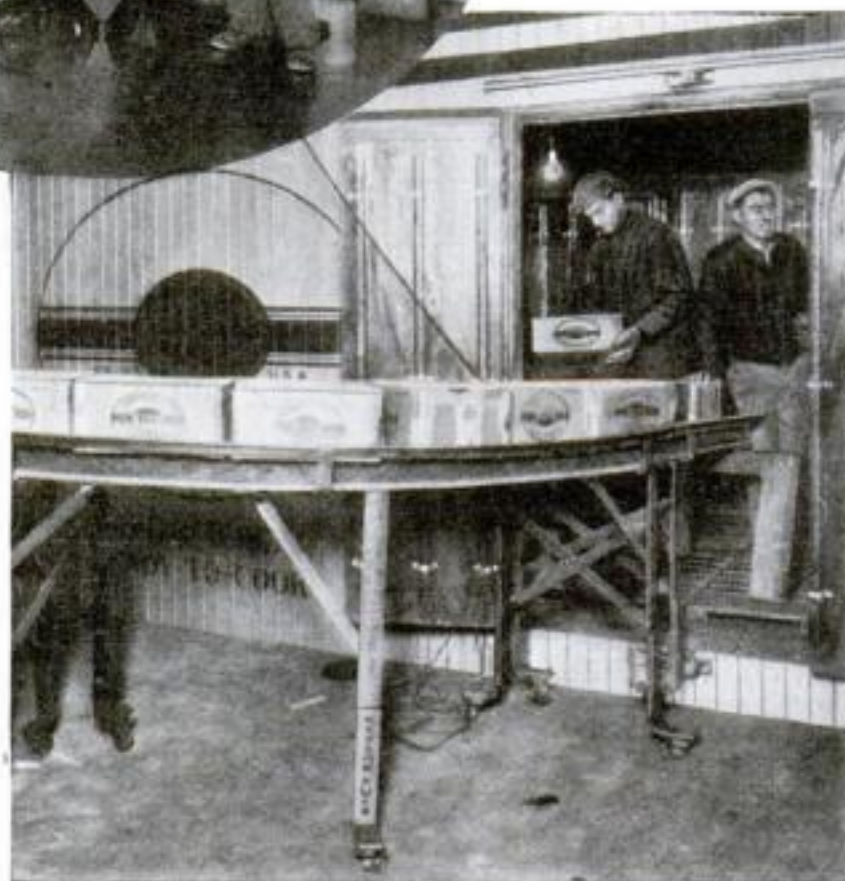

Not a moment is lost. Frozen fish, packed in cartons, are conveyed quickly into the refrigerator cars, which transport them.

But adapting the laboratory process to commercial use has proved less simple in fact than in theory. A fish's body is mostly water—from seventy-five to eighty percent, to be exact. To freeze a ton of fish, then, three quarters of a ton of water at room temperature has to be turned to ice—a process that requires the removal of about 280,000 B. t. u., or heat units. Otherwise stated, this feat is comparable to extracting heat from a thousand-pound chunk of glowing, red-hot iron until it is cool enough for a person to lay his hand on it anywhere with comfort.

Ingenious machines are at work in

these factories to accomplish the difficult operation. In a plant at Gloucester, Mass., fish with their fins and bones removed are placed in their final packages and sent rolling, carton and all, between two wide metal belts in a freezing tunnel. One belt presses firmly against the package from below and the other from above. Both belts are sprayed meanwhile with brine at forty-five degrees below zero, the searing cold being transferred through the metal to the package. Although the brine cannot come in contact with the fish, there is practically no air space to slow down the freezing. After an hour in the freezing tunnel the carton of fish emerges stiff as a brick. No more refrigeration is needed, and the cartons are packed into heat-insulated shipping cases, lined with material to exclude warmth, and are ready to be dispatched to their destination. Lately not only fish, but also clams and sausages, have been quick-frozen by the same method.


**I**N ANOTHER process used by a Groton, Conn., factory, boned or “filleted” fish are laid, unpacked, on wide aluminum plates that travel around an endless oval track in a freezing room. A trough beneath the plates is filled with brine at about twenty degrees below zero, in contact with the bottom of the moving plates. By the time a plate has made the circuit of the room, which takes forty minutes, the pink-white fish are frozen hard as stone. Operators with gloved hands feed the chilly objects into a wrapping and sealing machine that bundles them up in waxed paper and puts them in a package for shipment. Haddock, cod, sole, and other fish are treated in this way.

**A**N ICELESS refrigerator car, made possible by a new refrigerating

system without moving parts, transports such products as these to great distances. An observer looking for the great pumps and compressors that ordinarily go with iceless cold storage plants would be surprised at their absence. Instead, the heat of a small gas flame and a remarkable substance known as “silica gel” keep the refrigerating fluid circulating through coils within the car.

This silica gel, a hard, glassy material that looks like shiny sand, is one of the most porous materials known to science. When cool, it absorbs enormous quantities of the liquid that chills the pipes; when heated, it drives *(Continued on page 158)*



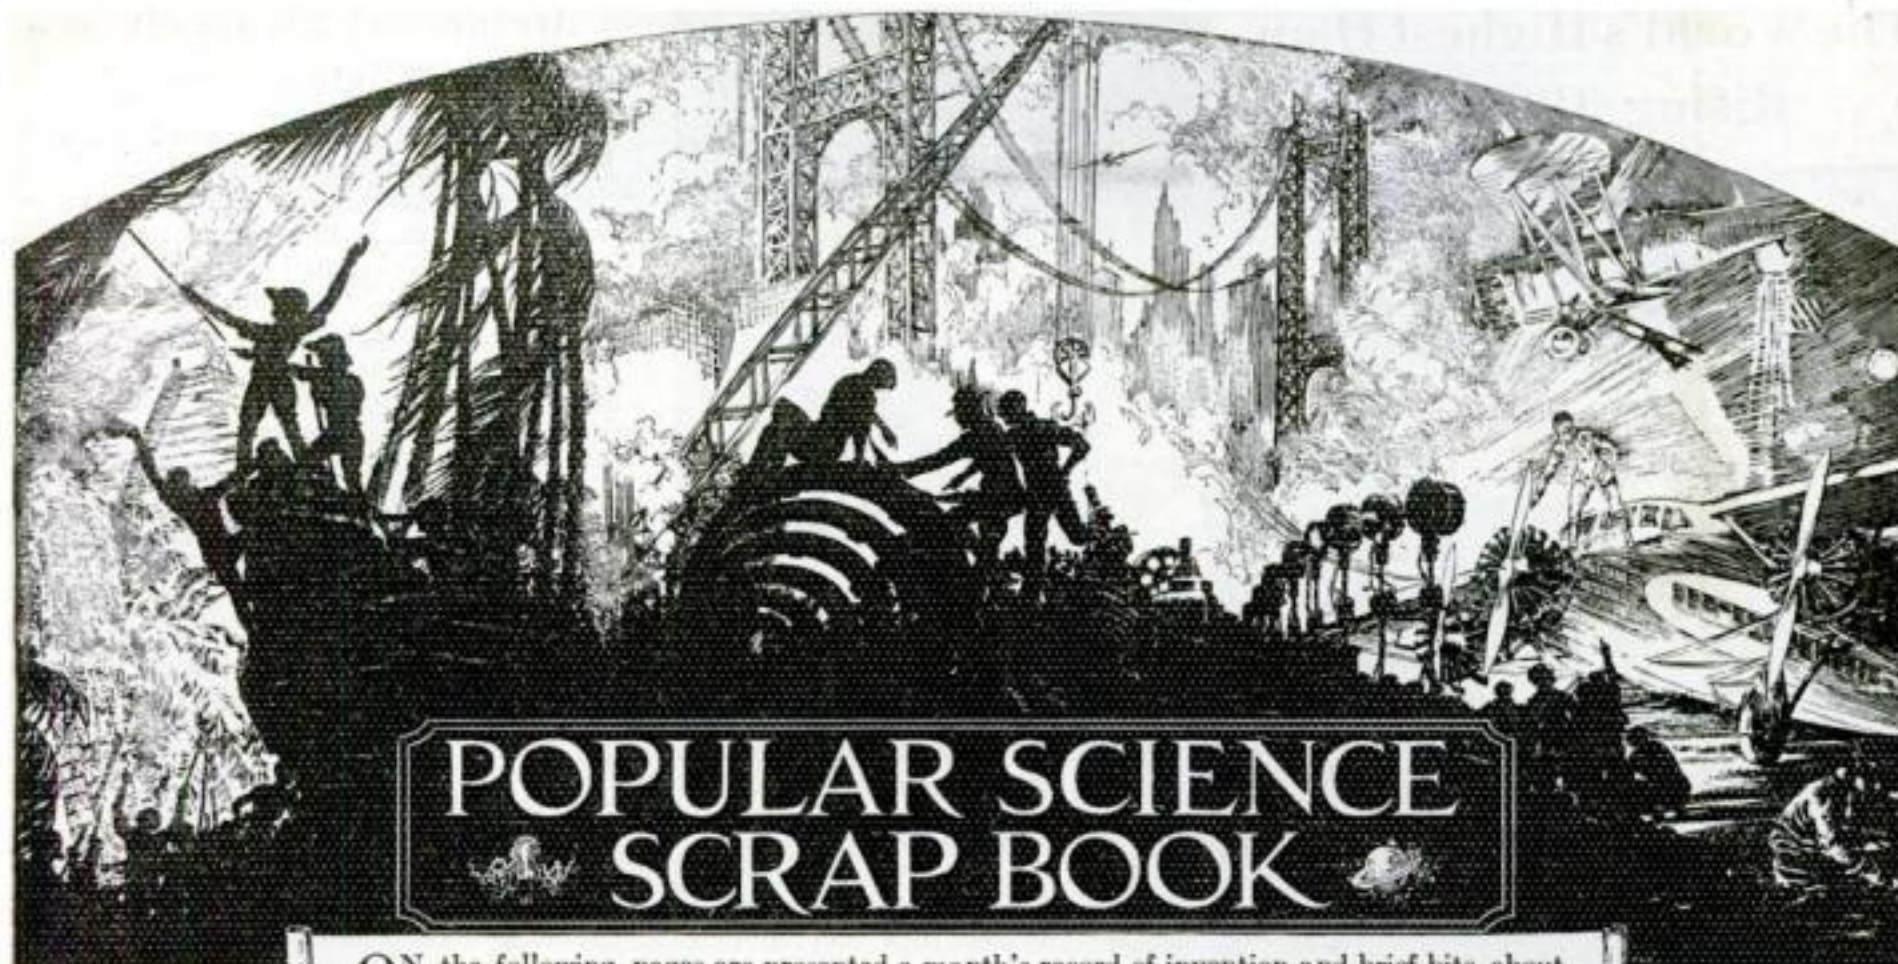

ON the following pages are presented a month's record of invention and brief bits about the new, interesting, and unusual things people are doing in all parts of the world.

## Young Astronomers Run High School Observatory

**O**VERLOOKING the Golden Gate, at San Francisco, California, is an unusual astronomical observatory, owned and operated by a high school. The building and its equipment are mounted on the top of the annex of the Galileo High School, which is named after the famous Italian astronomer of the seventeenth century.

The revolving dome surmounts an artistic concrete room in which the amateur astronomers meet for their nocturnal studies. It is entered by an outside stairway leading from the roof of the annex building. As part of their work, the members of the high school class assembled the equipment and mounted the instruments under the direction of their astronomy instructor, Harry Raphael.

**T**HE telescope, mounted within the twenty-one-foot dome, is of the refractor type. That is, it has a magnifying lens instead of a mirror within the barrel. Through its five-and-one-half-inch lens familiar stars may be studied closely while intricate electric clockwork mechanism within the base of the telescope circles the large "spyglass," synchronizing its movement with that of the heavenly bodies being observed.

Besides the large telescope, the equipment includes a second smaller instrument, as well as sex-

tants and other apparatus for supplementing the textbook work of the students with first-hand observations.

Funds to purchase the telescopes and mountings were raised by the high school students themselves.

The new equipment at San Francisco

is but one of several roof-top observatories erected by high schools for the use of embryo American astronomers. Besides, many amateur sky-watchers have built their own home equipment for studying the stars.

A junked automobile helped Leland M. Thurston, a sixteen-year-old Providence R. I., boy, to construct a telescope which he set up in his back yard. The elevating and rotating parts of the instrument were discarded units of the auto. Thurston purchased his reflecting mirror "in the rough" and ground and silvered it himself. A cobweb on the chimney of a neighbor's house appears like a piece of rope, he said, through the homemade instrument.

**RICHARD WILLIAMS**, a fifteen-year-old amateur, of San Jose, Calif., is the youngest member of the American Association of Variable Star Observers. He sends in to the Harvard University Astronomical

Division a monthly report of findings with his improvised telescope.

Recently an amateur living near Cape Town, South Africa, discovered a new comet. Officials of the Union Observatory in Cape Town named it the Forbes Comet after its discoverer. In 1927, two other comets, too faint to be seen without the aid of a telescope, were reported within a few days of each other. Both were discovered by amateurs.




High school students mounting their five-and-one-half-inch refractor telescope in the observatory. Electric clockwork mechanism synchronizes it with the movements of the stars.

The observatory on the roof of Galileo High School, San Francisco, and a student using a sextant.



## The World's Highest Dam Rising 386 Feet

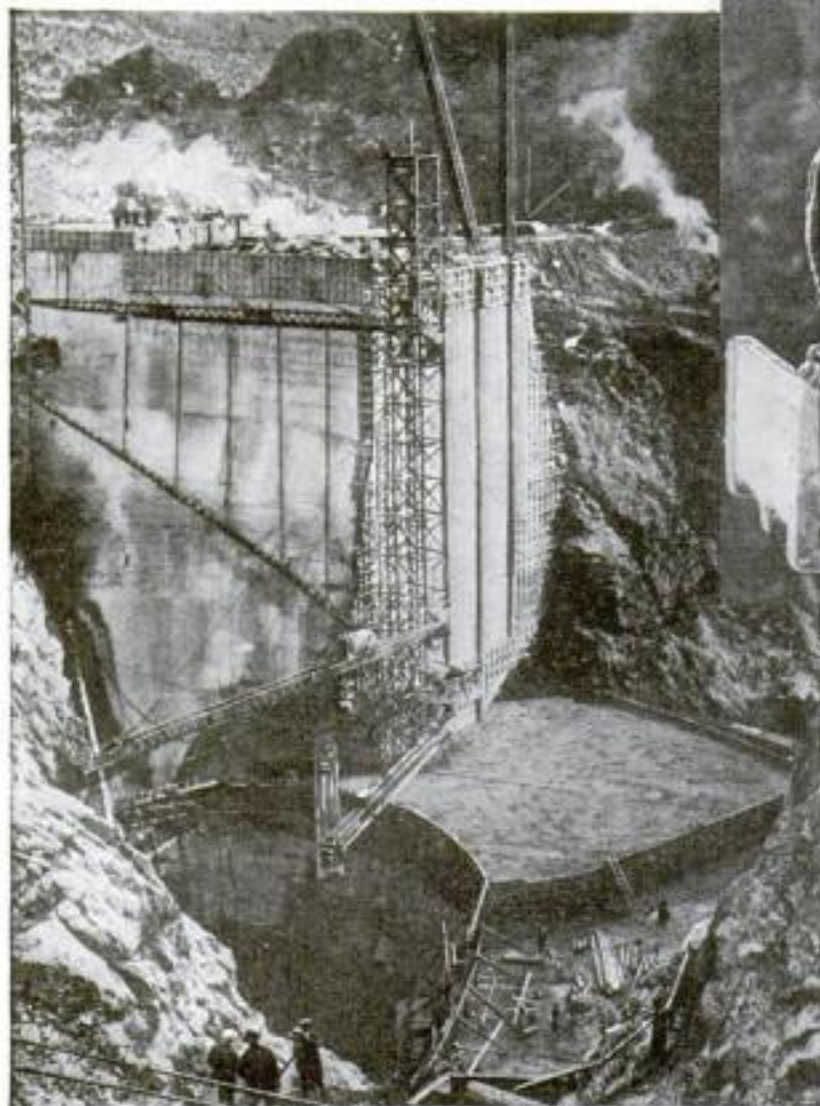

Building the 386-foot Diablo Dam on the Skagit River. An endless belt conveyor pours 1,500 cubic yards of concrete a day.

A CONCRETE dam that will be a foot higher than the present record holder, the Pacoima Canyon structure of southern California, described in a recent issue of *POPULAR SCIENCE MONTHLY*, is being built on the Skagit River in the state of Washington. When completed next spring, it will stand 386 feet high. It will form the heart of a gigantic \$30,000,000 hydroelectric project under construction by the city of Seattle.

The new Washington barrier, known as the Diablo Dam, is located on the west slope of the Cascade Range. Its base,

of the location, and the conveyor pours 1,500 cubic yards of concrete a day.

The mayor and city officials of Seattle recently made the 150-mile trip from the city to inspect the site of construction and observe the progress being made.

The neighboring state of Oregon will eventually eclipse the Diablo Dam with a structure that appears likely to hold the lead for some time. On the Owyhee River, in the eastern part of the state, near the Idaho line, the United States Government is erecting a mighty wall of concrete that will rise 405 feet when finished.



City officials of Seattle descending to the base of the dam during a tour of inspection.

150 feet thick, is embedded in solid rock, forty-five feet below the bottom of the Skagit River. The completed dam will contain 316,000 cubic yards of concrete.

A novel feature of the construction work is an endless belt conveyor for pouring the concrete into the forms. The framework on which the belt moves can be swung to any part

## Metals Act Strangely at 458 Below Zero

BY MAINTAINING a temperature of 458.58 degrees F. below zero in a chamber twelve cubic inches in size—nearly that of a half-pint container—Prof. W. H. Keesom, Leyden University physicist, recently paved the way for experiments to reveal new properties of matter. This temperature had been achieved before, but only in a space about the size of a small grape—of one cubic centimeter. With the Dutch expert's new apparatus, instruments may be placed in the chamber for studying the strange manner in which metals and other substances behave when they are subjected to the extreme cold.

It is hard for the human mind to conceive of such frigidity as 458 degrees below zero, when a variation of about 150 degrees spells all the difference between hot summer weather and icy winter. At the lower end of the temperature scale objects behave strangely. The air freezes solid, and a tin cup becomes so brittle that it can be shattered with a hammer into a thousand pieces.

Only eighty-two hundredths of a degree below the temperature of Prof. Keesom's half-pint flask lies "absolute zero"—that temperature, never yet attained, at which heat ceases to exist.

## Preventive Science Cuts Typhoid Death Rate


THE fight against the invisible typhoid bacillus was marked with increased success last year, the American Medical Association reports. Of eighty-one cities in the United States having populations over 100,000, nine had no typhoid deaths during 1928. One of these, Tacoma, Wash., stood at the foot of the list of Mountain and Pacific states in 1927. Last year, it made a record which none of the other cities has ever equaled. It had no deaths from typhoid or diphtheria during the twelve months.

Preventive inoculation and increased sanitary precautions are the weapons used against the disease. The value of vaccination against typhoid was demonstrated, during the war, in the American Army, where it was compulsory.

## Outboards Drive Racing Sloop through Canal

PROPELLERS of two outboard motors lashed to the sides of the after deck of the *Margaret F IV*, a racing sloop, recently drove it through the Erie Canal. When the owner decided to take the craft from New York City to Detroit, he found the hull was too high for convenient transportation by rail and decided to take it through the canal. As there was no room for tacking in this waterway, it was impossible to make the trip under sail; so a heavy piece of timber was bolted across the after deck and two outboard motors attached to it.


By turning the motors or slowing one down, the unusual boat was steered up the canal, reaching Lake Erie without trouble. This new wrinkle in navigation came shortly after outboard motors had been adopted as regular equipment on barges in an English canal, as related in the August *POPULAR SCIENCE MONTHLY*.

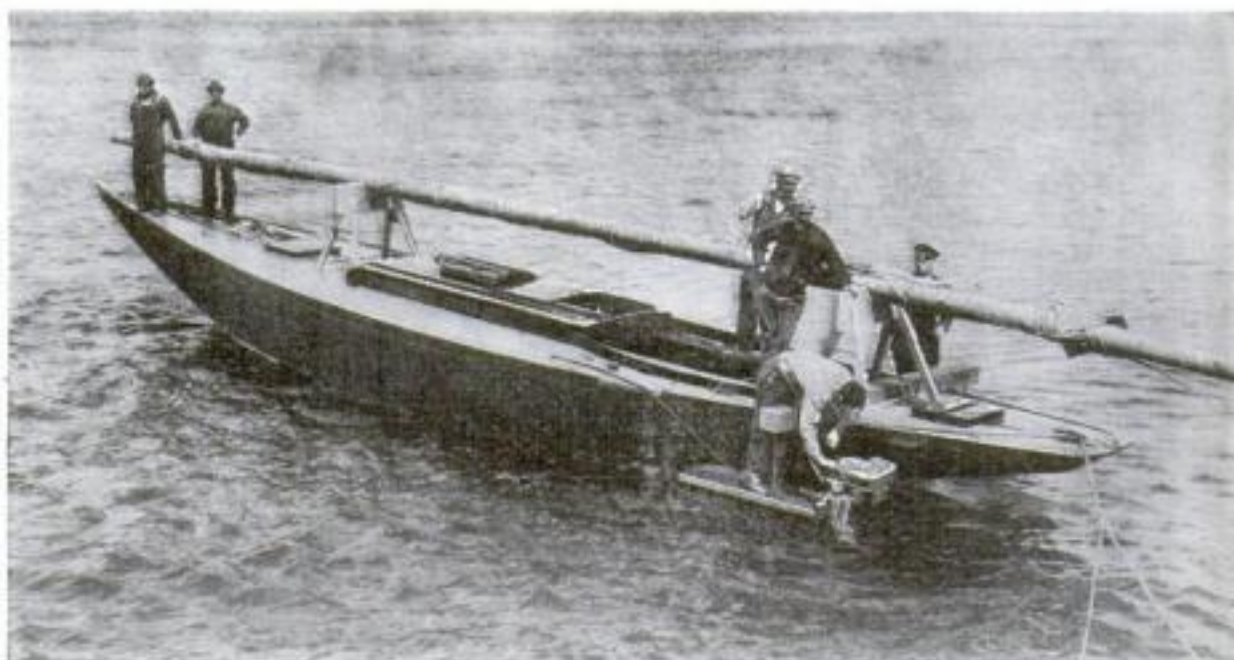

The racing sloop *Margaret F IV*, sails furled, starting her trip up the Erie Canal, driven by two outboard motors at the stern. The motors are attached to a heavy timber bolted across the deck.



## Largest Sundial Is a Lamp-Post at Night

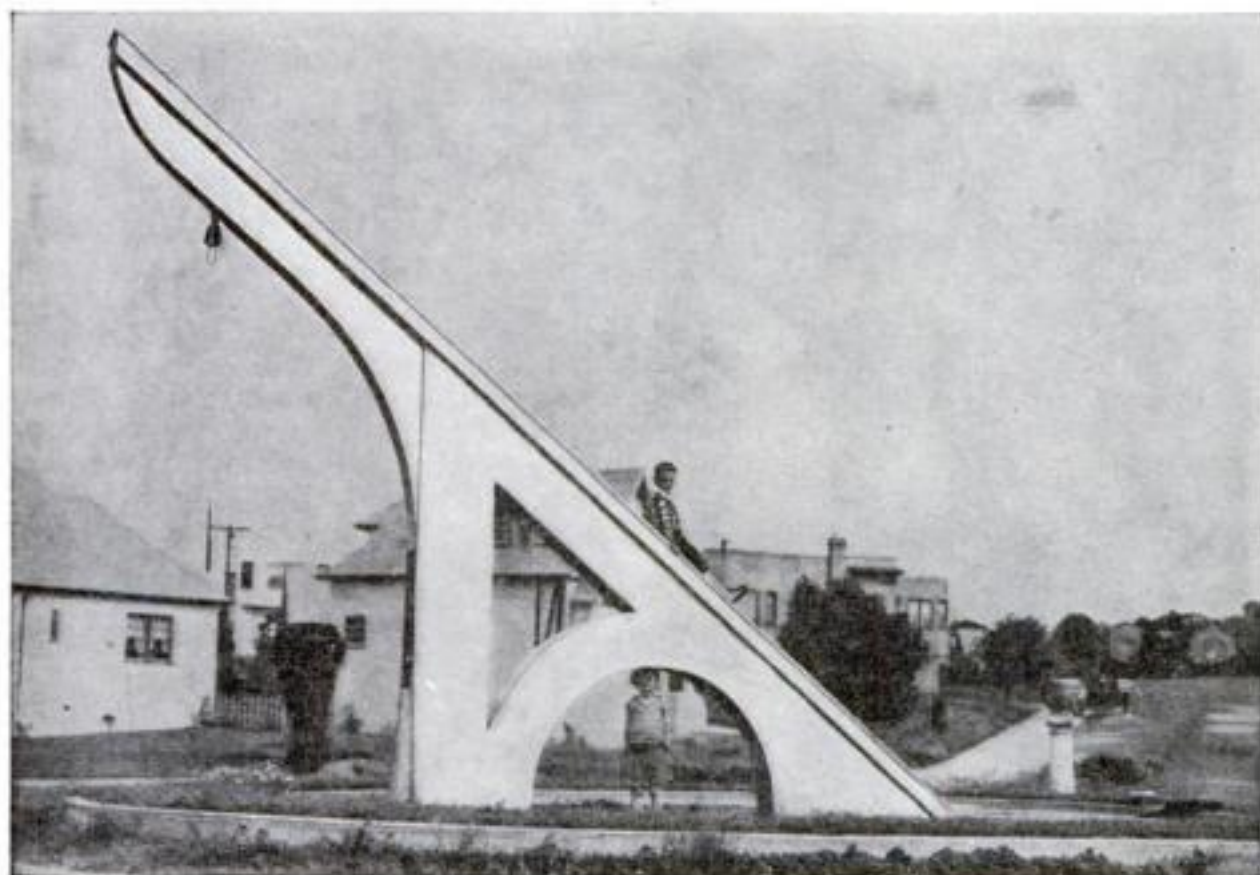

Constructed of reinforced concrete, this enormous sundial tells the time in a small park at San Francisco. The electric lamp hanging near the top of the sloping stile illuminates the park after dark.

**A** SUNDIAL almost as high as a house, and said to be the largest in the world, was completed recently in a residential district of San Francisco, Calif. Its sloping stile, which casts a shadow to indicate the time of day, is made of reinforced concrete; and about it circles a curb of concrete to form the dial itself, which is marked with hourly divisions.

More a curiosity and an ornamental structure than an accurate time-recorder, the enormous dial has attracted visitors from all parts of the city. Its upper end has been utilized as a lamp-post, an elec-

tric light hanging from it to shed illumination on the small park in which it is located; and children living near by use the sloping face as a slide.

Up until the eighteenth century, when clocks and watches began to be common, sundials were in wide use for telling time. A Babylonian astronomer, Berossus, about 300 B.C., constructed the first sundial of which there is certain knowledge. Four hundred years before this, however, the writer of Isaiah in the Bible referred to the shadow of a sundial but gave no inkling of how the dial was constructed.

## Speeding Train Drops Off Cars at Way Stations

**E**XPRESS trains which literally "fall apart" at full speed to deliver cars and their passengers at small way stations were put into service in England the other day. Coaches destined for minor stops are attached to the rear and detached or "slipped" when their stations are reached, while the train speeds on.

The "slipping" is accomplished through an ingenious uncoupling device. Over the coupling hook fits a sliding bar which is lifted by a lever operated by a "slip-guard" from a compartment at the front of the section to be detached.

As soon as the coupling is broken, the air brakes are automatically applied to the detached section. Naturally, both airbrake and train heating pipe connections are pulled apart, but the air brake pipe on the proceeding express is automatically sealed, as are the heating pipes on both sections.

## Counts 8,239 in Ant Hill

**H**OW many ants are there in the average mound?

About ten thousand, according to Prof. E. A. Andrews, of Johns Hopkins University, Baltimore, Md. In one case, Professor Andrews actually counted the ants in a mound and found its galleries inhabited by exactly 8,239 individuals. These insects were ruled by no fewer than eleven queens. The queen ant is not intolerant of her rivals like the queen bee, which kills all young pretenders to her throne unless prevented by the workers.

In previous counts of ant heap populations, the total often has been given as close to 30,000, and sometimes as high as 500,000.

## Farm Electricity from High Voltage Lines



**H**IGH tension lines, carrying thousands of kilowatts of electrical energy at high voltage, now can be economically tapped to supply current for farms and scattered villages along the line. The expense of installing elaborate substations has been eliminated by a miniature substation recently developed in the laboratories of the General Electric Company.

This miniature substation is fitted with a single-phase, oil-insulated, self-cooled, step-down transformer which takes the high voltage current from the line and transforms it to a lower voltage suitable for local distribution.

There is, of course, nothing new about the construction of such a transformer. Many thousands of step-down transformers are in use. The unique features of the new miniature substation are in the methods used to protect the main line against electrical troubles originating in the substation. As the illustration shows, extraordinary precautions are taken with the insulation so that if lightning strikes the substation the operation of the overland high tension line will not be affected. In addition, a short circuit on the local lines immediately operates to disconnect the entire substation so

that the short circuit is not carried back to the main line.

The introduction of this new substation will, it is believed, result in the electrification of thousands of farms and isolated communities now lacking the advantages of electric power.

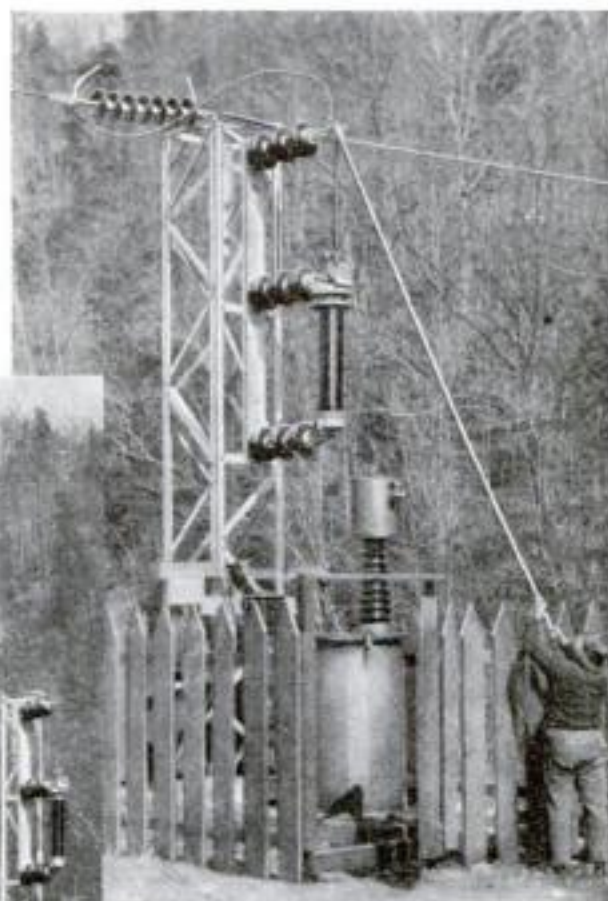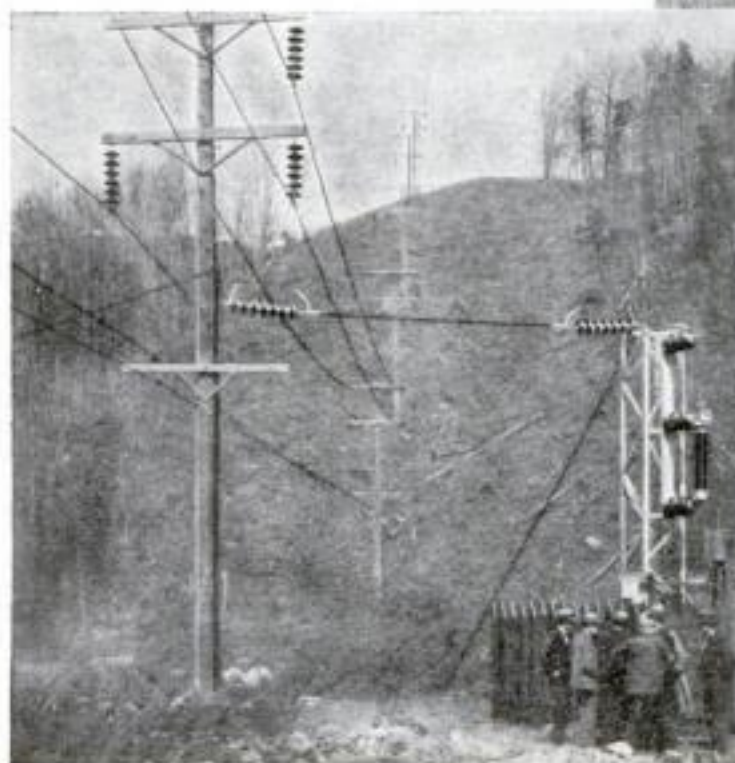


One of the miniature substations. Elaborate insulation protects high voltage line from lightning burn-outs.

Left: Another view, showing substation completely installed and connected with main line to supply farms.



## Monoplane Bremen Goes to New York Museum

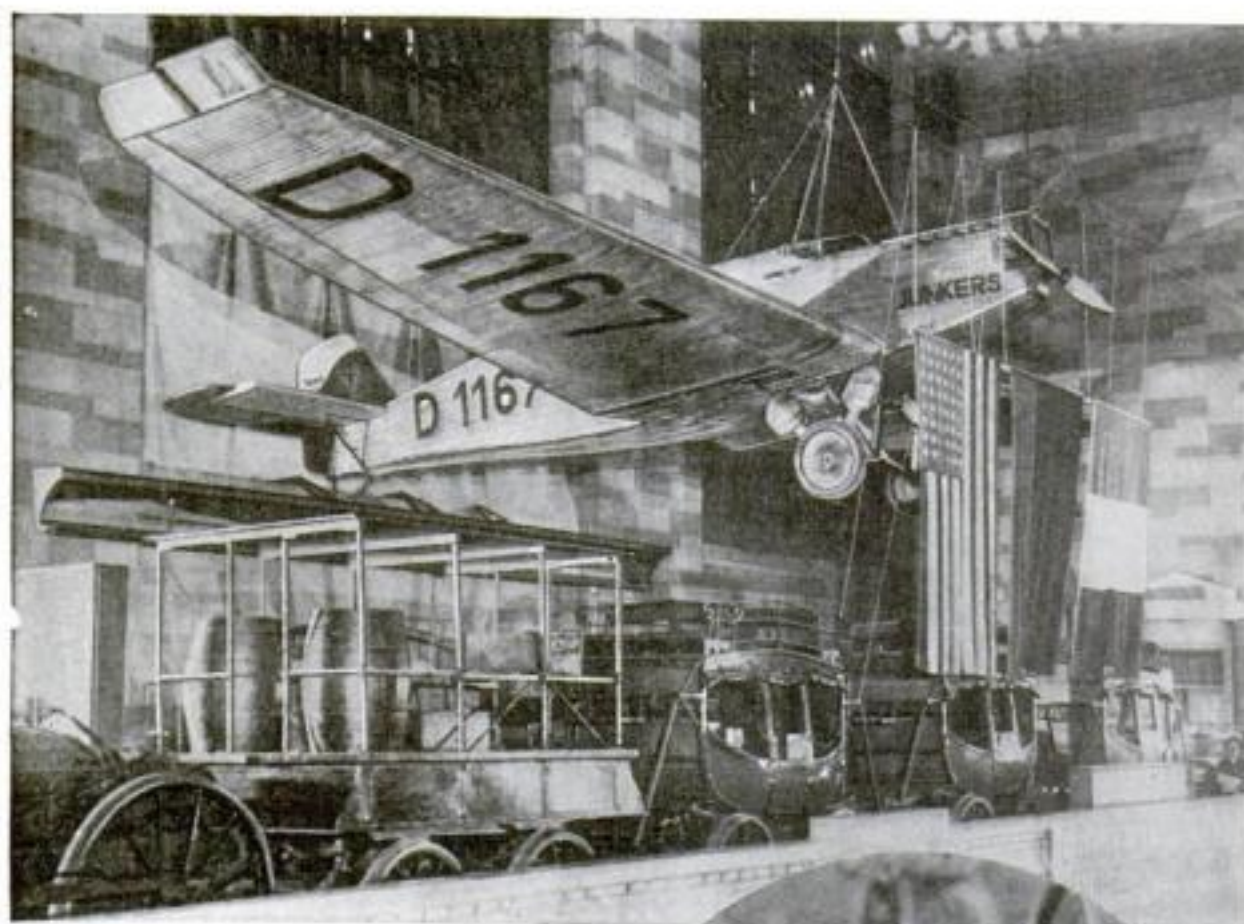

The *Bremen* hanging in Grand Central Station, New York, over one of earliest trains.

THE *Bremen*, famous Junkers monoplane, which made the first westward crossing of the North Atlantic last year, recently arrived in New York City, where it will be kept on permanent exhibition at the Museum of Peaceful Arts. The machine was presented to the city by the late Baron von Huenefeld, who with Hermann Koehl, German pilot, and James C. Fitzmaurice, Irish airman, made the historic crossing. It was first placed on temporary exhibition in the Grand Central Terminal, and there was seen for the first time by the American public.

In landing at Greenly Island, off the coast of Labrador, at the end of the flight, the plane crashed and could not be flown on to New York. The "Three Musketeers of the Air" continued their journey in a relief plane, leaving the *Bremen* on the island to be shipped from there later.

### Find Open Windows Are the Best Ventilators

OPENING the windows and letting Nature take its course is still the most effective way of airing a room, and no mechanical ventilating system thus far devised improves on this old-fashioned method. Such is the conclusion just reached by the U. S. Public Health Service after a survey of schools to determine the frequency of colds, bronchial trouble, and other respiratory diseases among the pupils in relation to the means of ventilation used in the buildings.

The investigators found that in mechanically ventilated schools the number of pupils suffering from respiratory ailments was a little less than twice that in "open-window" schools, the percentages being three as against one and eight-tenths.



### Auto Cigar Lighter Held by Suction Grip

A CIGAR lighter that can be installed on an automobile dashboard in a moment and requires no wires or batteries has appeared on the market. A rubber suction grip holds it to the dashboard. When its cap is pulled off, as pictured above, a file rasps upon flint, igniting the lighter, which is designed to burn any fluid used in the ordinary pocket device.

When not in use as an accessory in the motor car, it can be detached and carried in the pocket or stuck to a desk to provide a quick and handy light.

### Alaska Hunts Destructive Wolves and Coyotes

WOLVES roaming the tundra of Alaska are killing off reindeer at the rate of about 100 for each wolf during a winter. More than 500 reindeer were killed by only five wolves last winter near Unalakleet, and the previous season 200 were slain by two wolves near St. Michael.

Coyotes also are taking a heavy toll of fur-bearing animals and migratory birds, as well as of sheep and caribou. They have

destroyed entire colonies of foxes, and Alaska trappers are alarmed by the situation.

To end these depredations, the legislature of Alaska recently appropriated \$30,000 for a hunting campaign against the predatory animals.

### Soviet Machine Gun Fires Ten Shots a Second

TEN shots a second is the reported maximum speed of a new machine gun invented by a Russian and recently introduced in the Soviet army and air forces. Allowing for the time it takes to change the drums, the gun discharges 150 bullets a minute. The Lewis machine gun, used previously by the Russians, fires 125 shots a minute. The new weapon is said to be effective at a distance of about 2,400 feet.

### Traffic Light Warning to Safeguard Pedestrians

A FEW years ago, a pedestrian was crossing a street at a busy corner in Cleveland, O. Just as he was halfway across, traffic lights changed and he escaped the unleashed automobiles only by a mad dash for the curb. As he walked on, an idea popped into his head.

That idea recently took completed form in an invention which the pedestrian, Herman Gechter, assisted by Dr. Ernst Watzl, a Cleveland engineer, has perfected. It tells both pedestrians and motorists exactly how much time will elapse before traffic lights change. The device is a "clock," with a hand and a circular dial numbered from one to twelve, as in the usual timepiece; hand and dial are illuminated by neon light, as this is most easily seen at a distance. By glancing at the position of this pointer, an observer can determine whether the light on the traffic signal has just been turned on or is about to change. As the pointer touches twelve, the lights change.

Traffic signals equipped with new "clocks" will aid pedestrians crossing streets and motorists in gauging their speed.



The position of the pointer indicates the time before traffic lights are scheduled to change.



## Erased Writing Revealed by Ultra-Violet Rays

ULTRA-VIOLET rays, used in the treatment of rickets and other ailments, now are being called to the aid of the historian and antiquarian. Recently Professor G. R. Köbel, of the University of Vienna, Austria, discovered that, by means of ultra-violet rays, the now invisible writings on palimpsests, the doubly-written parchments of Medieval times, may be photographed and deciphered.

Parchment often was used twice and sometimes three times by the scribes of the Middle Ages, because of its cost and scarcity. The chronicler would erase, and frequently not very carefully, the writing from a document and use the same parchment again. By the new use of ultra-violet light, important historical, literary, and scientific data may be revealed.

American scientists have further discovered that various kinds of ancient inks may be brought to light by ultra-violet rays of different wave lengths.

## Woman Sets Office Clocks by 100-Year-Old Watch

A WATCH that is said to have kept perfect time for a hundred years has provided its owner, Miss R. Belville, of London, England, with a steady income for forty years. Known as "The Clockwoman of London," she makes daily trips to a number of business houses, setting their clocks to the correct Greenwich time as told by the old timepiece, known as "Arnold 345."

The watch was made for the Duke of Sussex, son of King George III of England. Later it came into the possession of Miss Belville's father, an attendant at the Greenwich Observatory. He discovered its remarkable ability and started the unique occupation of supplying the correct time to offices, which his daughter, now seventy-five years old, still pursues.




London's "Clockwoman" supervising setting of office clock by her hundred-year-old watch.

## Automobile "Tight-Ropes" on Power Line



H. Kambrinow, German dare-devil, driving his automobile on hundred-foot-high power lines.

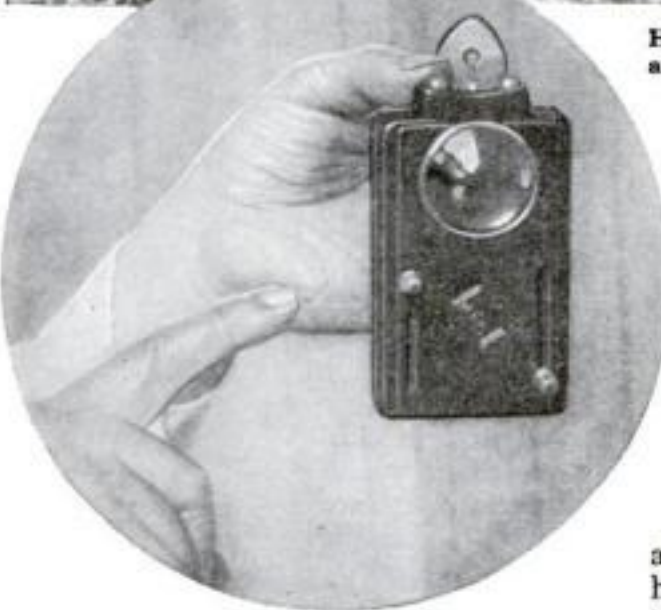

## Three-Color Flashlamp Serves as Signal

A RED, green, or white light is possible with a new electric flashlamp pictured above. It is designed especially for policemen, motorists, and campers, for whom it serves as a handy method of night signaling. When both buttons on the front of the device are at the bottom, the light is white. Sliding one of the buttons up pushes a red shield between the lens and bulb and the light changes to red. If, instead, the other button is moved up, the light becomes green. The first button to be manipulated must be returned to the lower position before the other one can be pushed up.

Another feature of the lamp is the arrangement of the three buttons at the top. One turns on the light, when pressed down completely. Given a slight pressure it can be used for flashing the light on and off in any of the three colors for "dot and dash" signaling. The center button locks the mechanism so that the lamp cannot become accidentally lighted while being carried in the pocket. The other button switches off the light. An adjustable leather strap permits the lamp to be carried in the hand, hung on the wall, or, whenever it is necessary, attached to a belt or button of a garment, leaving both hands free.

A TIGHT-ROPE-RIDING automobile recently thrilled watchers in the vicinity of Berlin, Germany, when H. Kambrinow, a dare-devil rider, drove the machine along parallel high tension wires for almost a fifth of a mile. At some places the swaying wires were a hundred feet from the ground, with yawning limestone quarries below, yet the heavy machine completed the trip safely at fifteen miles an hour.

The pneumatic tires had been removed, and the car ran on clincher rims, which held it to the wire. Before the perilous ride, the electric current in the wires was turned off at the power house to make the feat possible. Near the end of the performance, Kambrinow stopped the machine for a moment and, standing up in the seat, waved reassuringly to watchers in a gully below.

## Plant and Bird Species Outlived Monsters

PLANTS and birds descended from species that lived millions of years ago still exist, while the large mammals and reptiles of prehistoric times, such as mastodons, dinosaurs, and giant armadillos, have been extinct for centuries.

This fact was revealed by recent excavations in two widely separated parts of the world. In the Sutschansk mines near Vladivostok, Siberia, a Russian paleontologist, found fossil plants 155,000,000 years old. What he discovered were really leaf prints in the rock, but these could clearly be distinguished as belonging to a genus of which the American wild sarsaparilla and the Hercules shrub are descendants.

In Florida, representatives of the Smithsonian Institution unearthed a fossil bed in which bones of ducks, geese, storks, and other present-day birds lay side by side with the remains of mammoths, ancient horses, and other creatures of at least a million years ago.



## Claims Rubber Studs Make Tires Puncture-Proof

**I**NVENTION of a rubber tire that cannot be punctured, though it contains no metal armor, is claimed by E. C. Walton, LaPorte, Ind., engineer. His tire is protected by studding the tread of ordinary rubber with hard rubber disks, arranged in several layers beneath the surface so that they cannot work loose. These disks are sufficiently strong, he says, to stop a nail or piece of glass from piercing the casing; yet they do not interfere with the normal flexing of the tire. Since no metal is used there is said to be no heating of the rubber, nor any possibility of cutting the fabric. The invention should add greatly to the life of tires.

## American Hens Go In for Quantity Production

**E**FFICIENCY and mass production, watchwords of modern industry, have invaded the henhouse. Department of Agriculture statistics show that the United States had fewer hens last year than in 1927 but that the birds more than made up for the thinning of their ranks by laying a greater total of eggs.

At the close of the first half of this year, the number of hens was four percent less than last year, but again the "output" per hen was greater. In the same period, the hatch had increased six percent over the corresponding months of 1928.

## Paper Made Fireproof by New Secret Chemical

**I**MAGINE a blow torch, used to cut through steel girders, playing for an instant on a piece of paper without singeing it, or a piece of wood resting momentarily unharmed in a white-hot blast furnace.

Those apparent reversals of nature's laws are said to have been accomplished by two experimenters in Los Angeles, Calif. By soaking paper and wood in a secret chemical preparation, Dr. O. T. Hodnefield and Dr. W. W. Shartel report they have succeeded in making these inflammable materials virtually fireproof.

The inventors, it is said, are prepared to manufacture their fireproofing chemical soon on a commercial scale. They predict it will make wooden structures as resistant to fires as stone buildings are.




Dr. O. T. Hodnefield, co-discoverer of new fireproofing chemical, shows how it protects wood from a blowtorch flame.

## Blocks Simplify Nailing in Fireproof Walls



Left: Inserting corrugated wooden blocks in mortar joints to provide a convenient base for nailing trim to hollow tile wall.

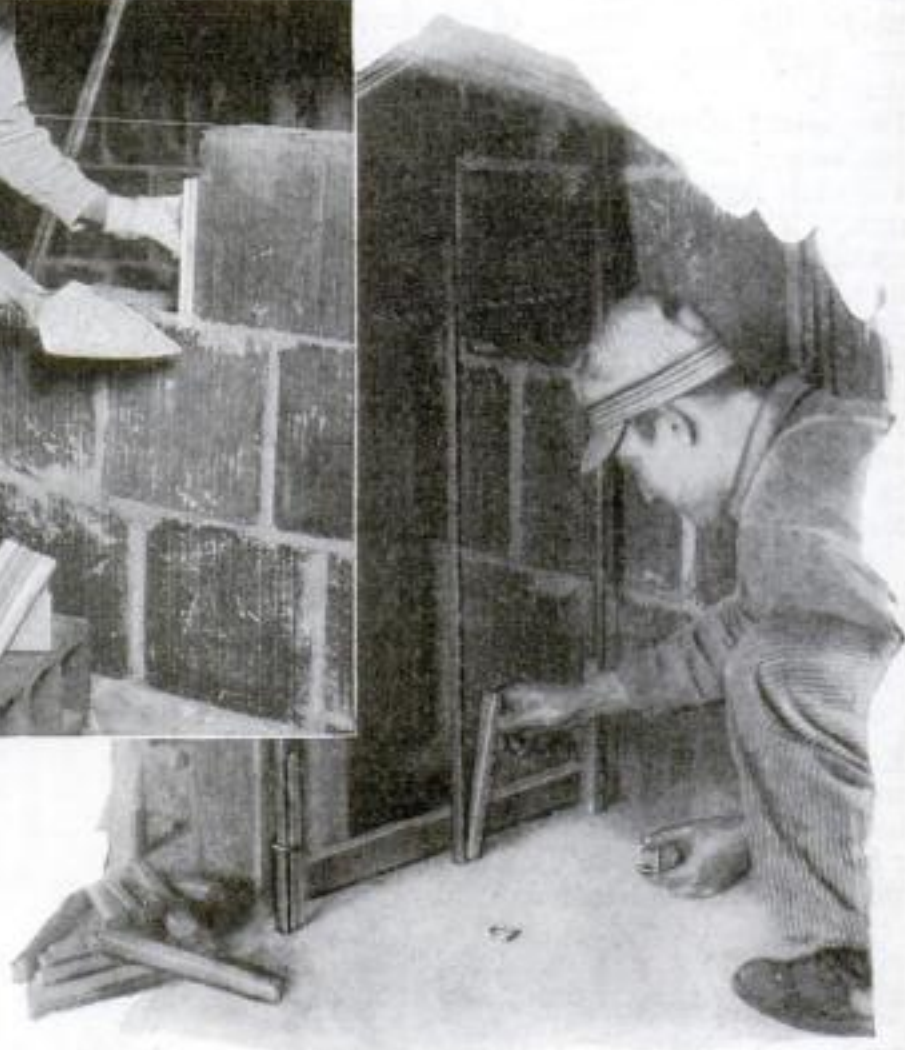

Below: Attaching nailing block to metal lath by means of a specially manufactured clip.

**T**WO recent innovations in building provide convenient nailing blocks for attaching baseboards, picture molds, or wall panels to walls made of hollow tile or terra cotta, or containing metal lath. For the metal lath, square steel clips, each with an opening on one side that allows it to be slipped on one of the narrow metal uprights, provide anchors for wooden wedges driven into the clips to form nailing blocks. For tile walls, blocks of wood, faced with upright grooves to give the mortar a firmer hold, are cemented between the tile ends.

According to the manufacturer, these devices make possible a fifty percent saving in labor and a reduction of more than half the costs in providing nailing bases in fireproof buildings. More than twenty-five thousand of the new clips and mortar joint blocks are said to have been used in one office building in Los Angeles, Calif., recently.

## Eggs, Beans, and Milk Cause Strange Ailment

**I**N A recent report to the American Medical Association, two physicians of St. Louis, Mo., described a disease which resembles hay fever in its causes. They told of persons suffering from purple spots on the face or body after eating small quantities of eggs or beans, or drinking as little as one spoonful of milk. This disorder, the doctors explained, is caused by oversensitivity to the proteins in these foods, just as hay fever is due to sensitivity to the proteins in the pollen of certain plants, resulting in inflammation of eyes and nose. The purple spots are the result of blood escaping from small veins and arteries just underneath the skin, producing "chemical bruises."

Habitual sufferers from hay fever in the United States may escape its discomforts by going to Europe, where, according to medical experts, the disease is much less prevalent than in this country. There are also, however, some "hay-fever proof" localities in the United States. Of these the White Mountain region in New Hampshire is best known.

## Radio May Set Watches

**W**ATCHES soon may be set automatically by radio if plans of an American timepiece manufacturer are successful. There is a race between this firm and a German concern, to produce the first radio-regulated timepiece that is practicable, according to Louis G. Caldwell, former general counsel of the U. S. Radio Commission. If it can be done, the watch of the future will keep observatory time so long as it is running.



## Air's Ozone May Be Caused by Sunspots

**P**ART of the ozone, that mysterious and healthful form of oxygen in the earth's atmosphere, may be produced by sunspots. Dr. F. E. Fowle, of the Smithsonian Institution, Washington, D. C., recently advanced the theory that, while one layer of ozone in the atmosphere is created by the ultraviolet light of the sun, another owes its origin to minute particles emanating from sunspots and shot at the earth by billions. This theory the physicist bases on his observation

that ozone is absent from the upper layers of the atmosphere during a minimum sunspot period.

Ozone, which was first observed by the Dutch scientist van Marum in 1785, has a faint blue hue and its odor resembles that of chlorine. The smell usually attributed to phosphorous is really that of ozone. It is strongly noticeable in the vicinity of an object which has been struck by lightning and near electrical machinery.



### Self-Centering Nail Set New Aid to Carpenters

**T**IME is saved in setting nails, or driving their heads below the surface of wood in finishing work, by a new tool designed to eliminate the usual hand-held punch. A conical opening at the bottom of the tool, pictured above, automatically centers the nail head below a plunger which is struck with a hammer to set the nail. A spring forces up the plunger after each nail is set. The self-centering feature is said to prevent marring the wood, as often happens when an ordinary punch slips off the nail as it is being struck.

### Radium Experts to Fight Cancer in Cities

**W**ITHIN a few years every large city in the United States will have a "cancer institution," equipped with from \$500,000 to \$1,000,000 worth of radium treatment apparatus and manned by a staff of experts and surgeons. Such was the recent prediction of Dr. James Ewing, head of the Department of Pathology in Cornell University, Ithaca, N. Y., and a noted cancer specialist.

These institutions, Dr. Ewing said, will be established by the various state health departments, with the aid of private philanthropists, as an integral part of a nation-wide cancer-control program that is sure to be executed in the near future.

### Hands and Feet Missing in Brazilian Family

**I**N TWO generations of a Brazilian family reported to the Eugenics Research Association, five of the members have been born without hands or feet. Three are children. Their father, similarly crippled, died recently. One uncle, also deformed, still lives. In explaining the strange case of hereditary deformity, biologists say the tiny living granules, called chromosomes, contained in every living cell, transmit characteristics from one generation to another. It is evident, they say, that the chromosomes of the Brazilian family lack some essential unit in their structure. This missing unit is the one responsible for the formation of feet and hands.

## Sculptured Panels Beautify Fire Escapes

**C**OMBINING beauty with utility, a California architect recently designed a new type of fire escape which constitutes not only an effective means of rescue but also an escape from the ugliness of the conventional gratings and ladders.

In his plans for the headquarters of a Hollywood motion picture concern, he substituted for the usual iron framework a series of decorative concrete balconies, connected between floor levels by a system of steel stairways. As a rule fire-escapes, because of ugliness, are placed at the sides or the back of buildings. But the Californian found that they could be made to strike a decorative note in his design, and so he included the balconies in his scheme for the front of the struc-

ture, overlooking one of the main streets.

The new fire escapes produce a pleasing architectural effect and, besides, are attractive in themselves. Each balcony, on its face and sides, is embellished with sculptured figures cast in concrete panels. In keeping with the purpose of the building, the relief design represents a scene in a motion picture studio, curiously executed in classical style. It shows a group of actors playing before a camera, together with their director and other studio attaches, all of them portrayed as they might have appeared in ancient Greece if the Greeks had had movies and movie studios. Smaller designs for the sides of the balconies are carried out in similar fashion.

Figures in relief also adorn the cantilever beams supporting the balconies. To carry through the scheme, concrete plaques featuring classical dancers are set into the facade of the building.

The plan may be followed in designing other buildings, by changing the decorative theme to suit. Plaster molds can be made from a sculptor's full-size model, and with these molds as many panels as are needed can be cast. In case a vivid effect is desired, colored concrete may be used.



A close-up view of one of the sculptured panels, cast in concrete, that adorn the fire escape balconies. Top: Decorative fire escapes on the front of the Hollywood building.



## All Skins Contain Similar Colors, Tests Reveal

**T**HAT the skin pigment of the so-called black, yellow, and red races does not differ from that of the white race except in quantity is the conclusion of two scientists at the Mayo Clinic and Foundation, Rochester, Minn.

Using a spectrophotometer, or color analyzer, they have made a study of skin coloring in regard to vividness, hue, and amount of light reflected. They found that some men are black and others white not because of different-colored pigment, but because varying amounts of the same pigments reflect light in different degrees. Large quantities of pigment hide the blood in the superficial layers of the skin, and the investigators discovered that this blood affected the color of the skin even more than the pigment itself. The quantity of pigment present, they say, probably is due to the amount of exposure to sunlight through countless generations.

## Engineers Like Blondes; Farmers Like Chickens

**T**HE fact that a man prefers blondes to brunettes may indicate that he should be an engineer instead of a lawyer, farmer, clerk, or mechanic, according to Prof. H. H. Remmers, of Purdue University. In a recent questionnaire submitted to agriculture and engineering students, he discovered that the engineers like short women, blondes, shopwork, city life, and methodical people. The prospective farmers like Jersey cattle, caring for chickens, digging in the garden, excursions, polite people, and work with children.

## Camera Records Unusual Lightning Display

**A**S A jagged streak of lightning twisted across the sky over the office buildings of downtown Chicago during a recent thunderstorm, a photographer on Michigan Avenue obtained the remarkable photograph at the right, catching the brilliant streak of millions of horsepower of electrical energy as it appeared framed by skyscrapers.

A flash of lightning, defined in its simplest terms, is merely a powerful electric spark. Billions of electrons accumulate on the clouds, and, when the crowding becomes too great, the electrons jump to the earth or to another cloud. That jump forms the lightning flash.

There are approximately 1,800 thunderstorms continually raging on the earth, it is estimated by meteorologists; and every second, somewhere in the world, a bolt of lightning is discharged from the sky. The electricity wasted in these destructive flashes surpasses many times the combined output of all the world's power houses.

The latest steps of science to capture some of this waste energy were described recently in *POPULAR SCIENCE MONTHLY*.



A brilliant streak of lightning, framed by Chicago skyscrapers, as caught by a lucky photographer during a recent storm.

## Diving Reporter Phones from River Bottom



Above: Lindsay Parrott, New York newspaper reporter, starting his dive to the bottom of the East River. Standing on the river bed, he reported his experience by phone. Left: The journalist-diver after his return to the surface.

diving suit and helmet, he was lowered over the side of a tugboat and began his descent.

As he slowly sank into the darkness below the surface, he began a running story of his sensations and experiences, speaking into a telephone instrument installed within the diving outfit. The story was transcribed by a man at the other end of the phone connection in the news room of the paper and was on its way to the presses before the bulletlike helmet of Parrott's diving suit appeared above the waves after he had been hauled to the top without mishap.

## The Stone Age Girls Used Lipsticks and Mirrors

**A**LTHOUGH \$100,000,000 is spent in the United States each year for cosmetics—more than ten times the sum this country sets aside annually for scientific research—American women are by no means the inventors of this form of facial adornment, nor are their present-day European sisters. The art of make-up, almost as old as the human race, had reached a high point of development among the ancient Egyptians, Greeks, Romans, and other peoples.

Recently it was discovered that the Irish colleen of the Stone Age, more than 2,500 years ago, used a lipstick. In graves of the period unearthed accidentally in the course of harbor improvement work on Lambay Island, off the Irish coast near Dublin, representatives of the Dublin Museum found sticks of waxlike pink paint which they declared the belles of long ago employed to heighten the color of their lips. Other interesting articles found in the graves included metal brooches, stone finger rings, and bronze bracelets. There also was an iron hand mirror which, according to experts, never possessed a high polish, but which was turned into an implement of reflection by dipping it first in water.



## Two Cross the Channel on Water Bicycles



Two "Channel-cyclists"—Roger Vincent (above) pedaled across in only five hours; Miss Aimee Pfanner (right) in nine.

down on the floats to repair it. Later the hydrocycle was caught in a strong offshore current, giving the plucky rider a hard battle for more than an hour before he touched land. A fishing tug, carrying official timers, accompanied him.

Using a similar machine a few weeks later, Aimee Pfanner, a mannequin of Paris,



A PEACEFUL invasion of England on water bicycles took place recently when a French sportsman and a twenty-two-year-old girl pedaled their way safely across the twenty-odd miles of rough sea water separating Calais, France, from Dover.

The first trip was made by Roger Vincent, who "bicycled" his way across the English Channel in slightly more than five hours, in spite of high seas and strong contrary winds. When nearing the white chalk cliffs of Dover, the sprocket chain of his machine broke and he had to climb

made the trip in nine hours and nineteen minutes.

She was trained for the trip by Rene Savard, who made what is believed to have been the first hydrocycle crossing, in 1927. His time for the journey was six hours and six minutes—only an hour more than the record made by Vincent.

## Crack Train Cuts Time Across the Cascades

RACING over winding rails in the shadow of snow-covered peaks, the *Empire Builder*, the Great Northern Railway's latest crack train on the Chicago-Seattle run, recently inaugurated a new sixty-one-hour schedule between the two cities. The striking action photograph at the right was snapped as the train's giant locomotive rounded a curve after battling deep snow in a pass of the Cascade Mountains.

Such service requires a specially articulated engine, built with the driving wheels in hinged units to permit it to traverse the sharp mountain curves.

With increasing competition from time-cutting aerial transportation, railways the world over are speeding up their trains. A new Italian locomotive is reported to have shown unusual power and speed in recent tests. It will operate between Milan and Venice.



The *Empire Builder*, the Great Northern's new Chicago-Seattle express, thundering through the Cascade Mountains.

## "Dry Ice" Offers a New Remedy for Leprosy

LEPROSY, regarded for centuries as an incurable disease, has in the past few years been treated successfully with chaulmoogra oil, obtained from an East Indian tree. This method, however, has two disadvantages—the treatment takes several months and the oil is so nauseating that it cannot be administered in very large doses.

Dr. A. Paldrok, a skin specialist at the University of Dorpat, in Esthonia, recently announced that he had developed a new leprosy cure which will do away with the shortcomings of the chaulmoogra oil treatment. By his method, areas of the infected skin are frozen with solid carbon dioxide, or "dry ice." Compounds of gold also are used in the treatment.

The intensely cold material is said to kill the tissues for some distance below the diseased surface. The dead tissue cells discharge chemical substances into the blood which stimulate the body to repel scattered leprosy germs.


## Anger and Fear Born of Childhood Diseases?

IF A person is quick-tempered or timid, or both, he is more to be pitied than scorned, for he probably is still a victim of diseases suffered when a child, according to Dr. George M. Stratton, of the University of California.

Experiments with students conducted by Dr. Stratton indicated that those who had suffered the most diseases in childhood were most susceptible to anger and fear. A record of the frequency of their emotion was compared with the students' medical histories. It is Dr. Stratton's theory that early diseases undermine the nervous system and glandular constitution, weakening their resistance to later emotional shocks.



## The Window Sash Cord

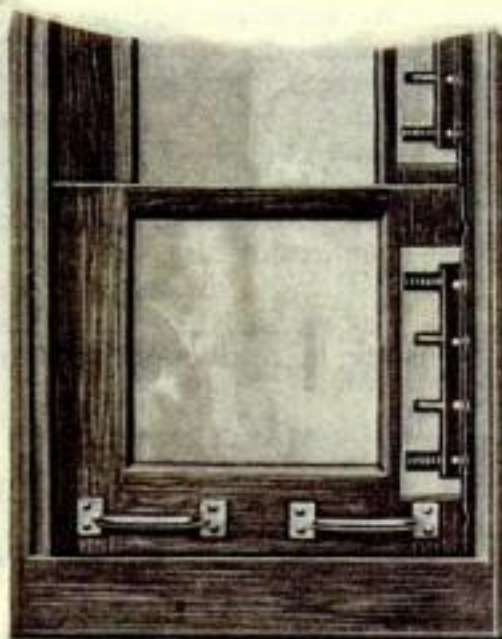

Broken-away view of window, showing spring and roller device which replaces the sash cord.

WINDOWS like those in FISHMAN CARS, which afford an unobstructed view and can be lowered and raised like automobile windows. In addition, the car has form-fitting seats, a floor of non-skid composition, and soft, subdued lights.

## Automatic Detector Gives Warning of Gas Leaks

**A**N AUTOMATIC detector to locate gas leaks or warn of the presence of fire-damp in mines has been invented by a woman in Paris, France. Whenever the quantity of gas in the atmosphere is greater than 1.3 percent the instrument sounds a warning by ringing a bell and flashing a tiny electric lamp.

Tests made in England as well as France are said to have indicated that the invention infallibly detects the presence of gas in the air. In France, it is being used to trace leaks in household gas lines and fixtures, and to insure that no gas escapes from loose plumbing joints when new meters are installed.

The London street gas explosions of some months ago inspired the inventor.



Locating a gas leak with the automatic detector. Excessive gas rings a warning bell and flashes a light in the instrument.

## Dry Air in Homes Causes Rugs to Wear Out

**I**N WINTER, the air in the average American home has less humidity than that over the Sahara desert. A kiln for drying lumber contains more moisture than a typical American room. These surprising facts were discovered during a recent study, in New York state, of the effect of dryness upon valuable rugs.

Health authorities say that from thirty to forty-five percent humidity should be maintained for the most healthful living conditions. Yet most homes in cold weather have less than twenty percent, the report shows.

As much as a bathtub full of water, from twelve to twenty gallons, should be evaporated every day in a good-sized house, to keep the humidity at the comfort point during zero weather. One of the contributory causes of wear in valuable rugs, the report points out, is insufficient humidity. In its natural state, wool holds thirty-five percent water. A reduction in moisture causes the rugs to "fuzz-out," thus losing part of the fine wool woven into them.



## Talkie Actors Rehearse on Skeleton Stage

**A** BROADWAY actor who had entered the "talkies" told in POPULAR SCIENCE MONTHLY, a few months ago, how the tearing of a piece of paper during the filming of one talking picture had spoiled a sound sequence that cost approximately five hundred dollars. Slight mistakes on

the stages where talking movies are produced may mean losses of thousands of dollars when elaborate equipment is used to record actions and spoken words at the same time.

As a result, skeleton sets for rehearsals only are now part of the equipment of the Hollywood "talkie" studios. These rehearsal stages are laid out with the same measurements as the actual sets and include lettered signs to indicate doors, "windows," and other features involved in the scene. Here the players go over their lines and stage business in consultation with directors and authors.

The scenes are letter-perfect before they are transferred to the "shooting" set.

The photograph above shows Herbert Brenon, film director, going over a scene with Fannie Hurst, author (at his right), Winifred Westover, actress, and Karl Struss, photographer.

## Relief, Not Sorrow, Real Cause of Weeping

**I**N MOST cases, neither sorrow nor joy but rather relief from the tension induced by either one of these emotions is the real cause of tears. Dr. Frederick H. Lund, of Bucknell University, and Dr. H. V. Pike, of Danville State Hospital of Pennsylvania, after an investigation of the causes of weeping, recently reported this conclusion to the American Psychological Association.

Working on subjects with pronounced emotional reactions, the investigators found that weeping rarely occurred in a state of dejection or elation, but mostly when the depressing mood was alleviated by brighter circumstances or when calm set in following too great a joy.



## Boys Need More Sunshine than Girls for Health

THAT "boys are harder to rear than girls" was recently given support by statistics issued from the Children's Bureau of the U. S. Department of Labor, in Washington, D. C. These reveal that, although more boys are born in the United States than girls, the latter have thirty percent more chance of living. During the first year, 130 boy babies die for every 100 girls who fail to survive.

One reason for the higher mortality among male infants is indicated by Dr. Henry Bakwin, of Columbia University, who recently reported he had found that boys need more sunlight than girls, developing rickets and other diseases more readily when deprived of the beneficial rays of the sun. During months of plentiful sunshine, the death rate of boy and girl babies becomes practically equal.

## Mechanical Nurse Holds the Baby's Bottle


A MECHANICAL baby-bottle holder, designed to relieve mothers of the strain of holding the bottle while infants finish their meals, was recently exhibited in Chicago. Attached to a weighted base is a flexible arm similar to those used on desk lamps. Clamps at the end of this arm hold the bottle, which can be adjusted to any position.

When the meal is over, the "baby diner" is taken away. Its flexible arm can be bent down, permitting it to be stored in a small space when not in use—a further advantage.



Just a minute, please. He'll be happy as soon as the flexible arm is bent to place the bottle in the right position for his meal.

## Five Brothers Build an Unusual Airplane

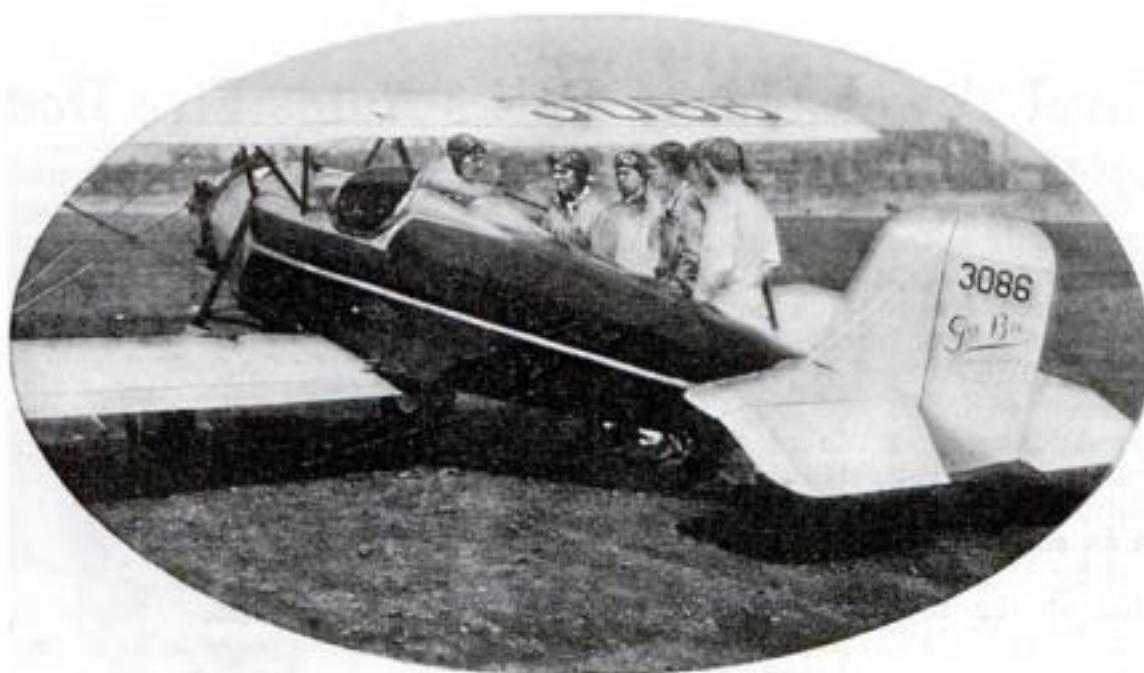

WHEN five brothers of Madison, N. H., constructed their own airplane, they included features not found in more conventional models. Following the design of Z. D. Granville, twenty-eight, oldest of the quintet, they put the joy-stick

on the dashboard instead of in the floor, to give the pilot more room, and made the top wing adjustable for high or low speed flying. The photo shows the plane's designer in the cockpit, and the four other builders standing by.

## Substitutes for Store Clerk's Handwriting

A FEW months ago, P. A. Best, director of one of London's large stores, told in POPULAR SCIENCE MONTHLY of the need of a new style of handwriting that would enable clerks to write fast and foolproof records. Illegible sales slips, he estimated, cost department stores millions of dollars a year.

A recent American invention is said to help remedy this situation, preventing errors that result in misdirected parcels. Each customer is given a small metal plate, or address token, to carry in his pocketbook. Upon it is embossed the customer's name and address. In making a purchase, he hands the plate to the clerk who places it into a small hand-held imprinter. When the sales slip and duplicates are slipped between the jaws of the imprinter and the handles squeezed together, the name and address are



Stamping name and address of a customer on the sales check with the new hand imprinter.

stamped correctly upon all of the slips.

According to the manufacturer of the device, this procedure eliminates error and saves time for clerks and customers.

## Tiny One-Cell Creature Wears Life Preserver

THOUGH composed of only one cell and not much larger than a pin-point, the arcella, a tiny creature that inhabits the ponds and streams of Europe, carries its own life-saving equipment within its microscopic body. The late Dr. E. J. Bles of Cambridge University, England, discovered not long ago that the minute animal, which lives in a miniature shell, possesses a chemical mechanism by which it saves itself from drowning. When the arcella sinks into water containing insufficient oxygen for its needs, this mechanism automatically fills a hole in its little body with gas. Thus rendered lighter, the arcella shoots up to the surface.

## Aluminum Coat Prolongs Life of Duralumin

A THIN coating of aluminum over duralumin, the light metal used extensively in dirigible and airplane construction, was shown in tests made by the U. S. Bureau of Standards to prevent corrosion which makes the high-strength alloy brittle and weak.

A "wobble machine" played an important part in the tests that led to the discovery of the protective coating. Specimens of duralumin were corroded in salt water while being stressed by being bent back and forth by the "wobble machine." The aluminum-coated duralumin proved superior to the uncoated metal.

## Paraffin to Heal Lungs


BY INJECTING paraffin into the chest, Dr. Hugo Hauke, a surgeon of Breslau, Germany, has speeded the recovery of tuberculosis patients, he reported recently to a surgical congress in Berlin. During pulmonary tuberculosis, cavities form, particularly in the upper lobes of the lungs, and prevent the curative process, Dr. Hauke explains. If the diseased parts of the lobe are cut away from the chest, the cavities will collapse; paraffin injected into the resulting space will hold them flat.



## New Antiskid Pavement Made Like Waffles

**W**AFFLE pavement" is the latest protection against skidding in Berlin. When an asphalt street was laid recently in the German capital, a huge "centipede" machine with several rollers, in a train, ran over the hot surface to give the final leveling. The rear roller, with criss-cross ridges, marked the surface of the asphalt like a waffle to provide additional traction for automobile wheels. Tests are said to have shown the nonskid pavement to be effective in wet weather, reducing the number of accidents. It is expected that the new surfacing will be tried in other parts of Germany as well as in Berlin.

Another unusual method of combating skidding on pavements has been reported

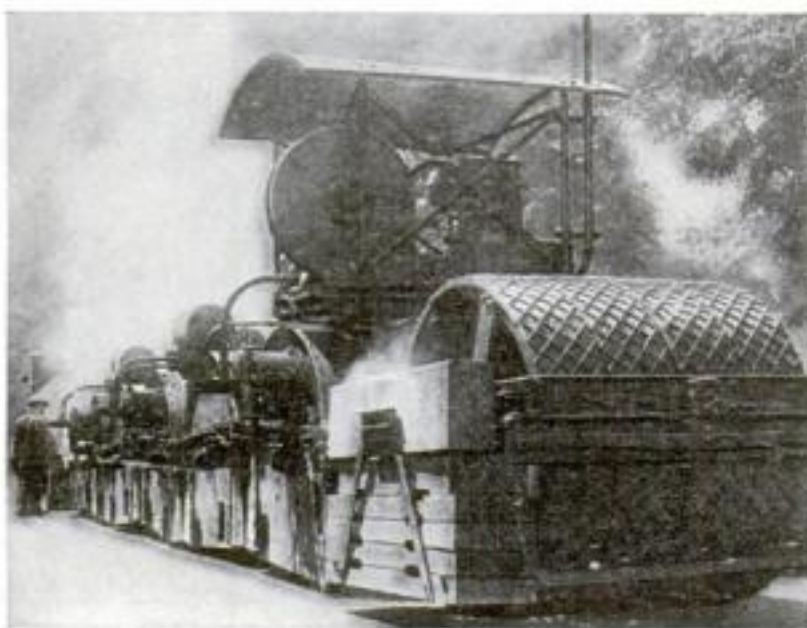

The last of this huge train of rollers impresses criss-cross lines in hot asphalt pavement as a safeguard against vehicles skidding.

from Paris, France. Layers of rubber were placed at street corners to help autoists to stop quickly and with less skidding.

## Physical Comfort a Guide to Good Ventilation

**P**HYSICAL comfort should be the guide in the matter of house ventilation according to experts of the U. S. Public Health Service. The idea that all out-door air is "fresh" is a fallacy, they say, and so is the notion that sleeping with wide-open windows, regardless of temperature and weather, is necessarily healthful. The air from the outside, especially in cities where it is poisoned by smoke, dust, and various harmful gases, is often less desirable than that indoors.

As for bedroom windows, the experts have calculated that, on a cold winter night, enough air leaks between the sash and the casement and between the upper and lower halves of a closed window not provided with weather stripping to supply one adult with about 180 times the quantity of air he requires.

Still, the Health Service does not advocate sleeping with closed windows, any more than it advises going to bed with chattering teeth, a practice which is called far from healthful.

## More Women Flat Footed; Jobs Are Blamed

**A** SUDDEN increase of flat feet among women has been noted by a German orthopedist, Dr. Gustav Muskat. In the past, he says, approximately twice as many men as women have had flat feet, but recently the ratio has changed, so that now it is three to five against the women. He attributes the change to the many women in "gainful occupations."

## Novel Tower Garage Parks Autos Five Deep


**A**UTOMOBILES are "stacked" five deep in a novel experimental parking tower recently opened at Sandusky, O. Occupying ground space no greater than that required for an ordinary two-car garage, the tower accommodates ten machines. The inventor is J. E. Morton, a Sandusky engineer.

The building is made of reinforced concrete. Within it, ten heavy steel platforms, each holding a car, form an endless belt that is moved by an electric motor located at the top of the tower. Thus while the platforms on one side are rising with their cars, those on the other side are descending. At top and bottom the platforms slide across from one "column" to the other.

Double doorways are provided at the ground level so that two machines can be driven into the unique "hanging garage" at the same time. The motorist who wishes to park his car in the tower, drives in through the doorway and leaves the machine. Then the platforms are moved like the cars of a ferris wheel until another empty one reaches ground level in readiness for the next patron. When the motorist returns for his automobile, the machinery is again set in motion until the desired car reaches the level of the door.

The inventor suggests that, without additional ground space, the towers can be increased in height to accommodate sixty automobiles and yet be perfectly

safe. Having made and tested a working model of a sixteen-car tower, he proposes hundreds of similar parking towers, erected at various parts of a city, to solve the parking problem and speed up traffic.

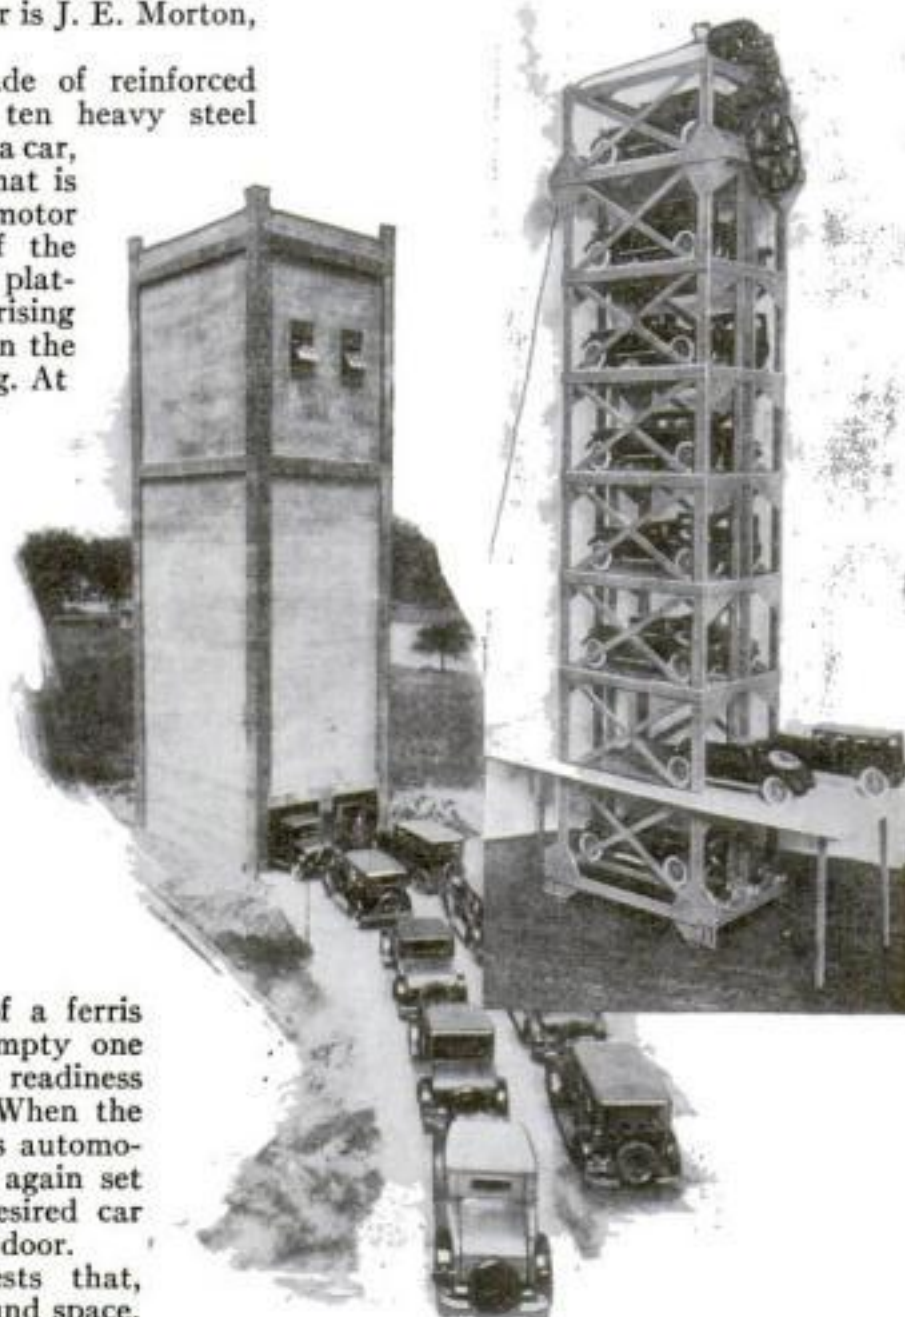

Experimental ten-car parking tower at Sandusky, O. It requires no more ground space than the average two-car garage. Above: inventor's model of sixteen-car tower.

## How Much Do You Know About Photography?

**T**EST your knowledge with these questions, chosen from hundreds asked by our readers. You will find the correct answers on page 156.

1. Why is the picture on a film reversed—black where white should be?
2. What is the difference between a fast lens and a slow one?
3. Who took the first photograph?
4. How do you determine the best focal length for a lens?
5. Why do pictures of racing automobiles always look distorted?
6. Why are special lenses needed to take colored movies?
7. How big can an enlargement be made without becoming fuzzy?
8. What is the difference between an anastigmat lens and the cheaper lens, except the price?
9. What makes stereoscopic pictures look so natural?
10. What is the difference between a lens marked f/8 and a lens marked f/6.3?



## American Shad Shipped to Japan by Millions

ANOTHER "round-the-world" trip is being taken—this time by a species of herring, the American shad. From Oregon rivers young shad are being transplanted to Japan, with such success that the Japanese government plans to spend large sums to further the work. Last year 3,000,000 fry, shipped in Columbia River water in barrels, were transported across the Pacific. This was the second stage in a trip which began some years ago when the shad was moved from the North Atlantic coast to the Pacific.

## Health Cards Proposed

THE municipal health department of Bordeaux, France, proposes to ask all citizens to carry cards which will contain a record of every disease the bearer has suffered, every operation he has undergone, and other notations concerning his health. The purpose is to aid hospital surgeons in compiling a "case history" in the event of an accident. Carrying of the records will be optional in Bordeaux, but some European health authorities wish to make it compulsory, to aid in detecting persons with contagious diseases.

## This Poultry Farm Has 300,000 Laying Hens

MORE than 100,000 eggs are collected every day at one of the world's largest poultry farms, near Los Angeles, Calif. On this hundred-acre ranch are housed 300,000 laying hens—equal to the total population of a city the size of Denver, Colo. Add to this number the 200,000 baby chicks which are being raised to become egg producers, and the total becomes half a million.

To feed this flock of cacklers, a million pounds of chicken feed is used annually.

Scientific methods of feeding and sanitation and the latest mechanical and electrical equipment are employed to increase production. A small army of workmen is required to care for the flock and look after their daily needs.

In the photograph are seen hundreds of pails filled with about three fourths of the daily yield, valued at more than \$5,000. About a third of the entire population of the United States could be supplied with an egg from the annual production of this one farm.



Eggs by the thousands. Here is part of one day's work of 300,000 hens on a farm near Los Angeles.

## Movie Camera Detects False Alarm Jokers

MORE than 7,000 false fire alarms were turned in last year in New York City alone. Nearly one out of every four times that the fire engines dashed through the streets, they were wasting time and

money responding to a false alarm.

To protect the city from the costly pranks of practical jokers, a new fire alarm box, equipped with a mechanical "eye," has been designed to photograph each person who turns the alarm key.

On a projecting arm above the post to which the alarm box is attached a motion picture camera is focused upon the box. When an alarm is turned in, the camera automatically exposes a strip of film for a photographic record of the person below. If the alarm proves false, the film gives the police a means of identifying the culprit.

Mayor James Walker, of New York City, recently tested the invention. Fifteen minutes after he had turned the key, a film showing him performing the act had been developed. The camera is noiseless and the films can be preserved for future reference at police headquarters.

THE NAMES and addresses of manufacturers of devices described on these pages will be supplied on request wherever possible. Write to the Information Department, Popular Science Monthly, 381 Fourth Avenue, New York City, inclosing a self-addressed stamped envelope for reply.



Mayor James J. Walker, of New York City, turning in an alarm to test the new motion picture detecting device. The camera attached to the arm at the top of the post recorded his image on a strip of film. The developed film is shown at the right.

## Grasshoppers Have Valves for Breathing

GRASSHOPPERS, which, like all other insects, have no lungs, breathe through an intricate system of air tubes ending in tiny valves in their sides. The insects are able to control the operations of these pipes and portholes at will.

These facts were revealed in experiments conducted the other day by James M. McArthur, a Louisiana entomologist. To study the grasshopper's breathing system, he placed some of the valves under water and sealed others with varnish. He found that the insects can control the working of the tubes, just as human beings can breathe through the mouth or the nose. He discovered, too, that when a grasshopper prepares for a jump, its muscular motions pump air in and out of the small breathing pipes, through which the air is carried directly to the various organs of the insect's body.


## Finds X-Rays Futile for Speeding Up Evolution

THE hope of producing superior types of men by X-rays is pronounced futile by Dr. Halsey J. Bagg, of Memorial Hospital, New York City, an expert on heredity. Success in producing variations in fruit flies and mice by exposing the parents to the rays have led some experimenters to conclude that human evolution might be speeded up by their use. Dr. Bagg points out that the variations produced in the laboratory cannot be governed and that frequently they appear as deformities.

Rats and mice, for instance, exposed to the rays, produced offspring with one kidney missing in the first generation and with the kidneys wholly absent in the second generation after exposure.



# Power Detectors—How They Work

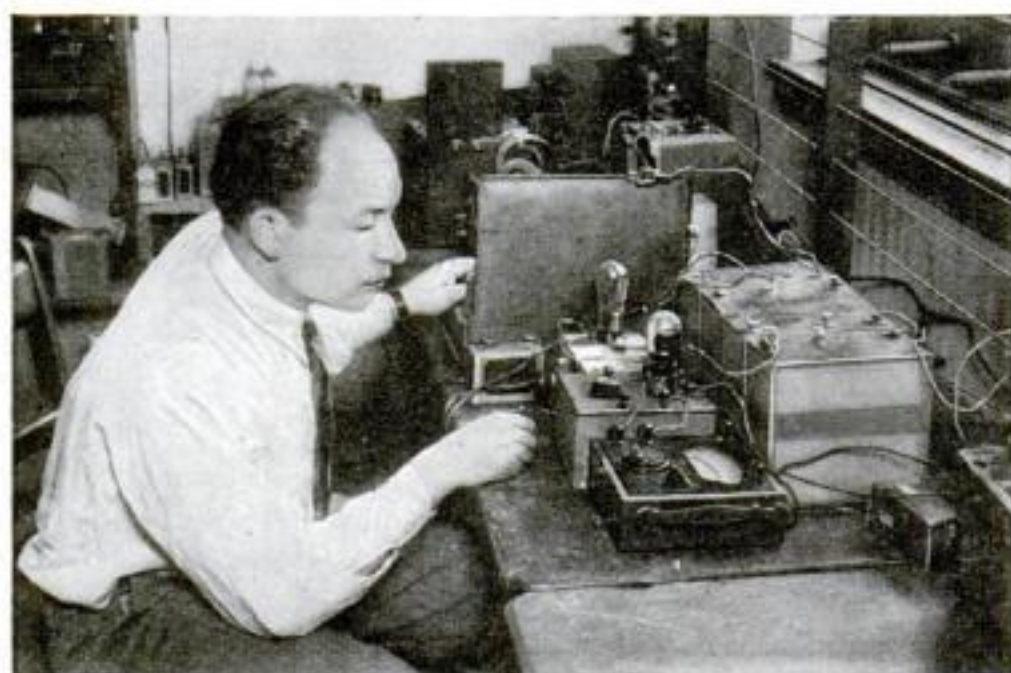

The New Methods of Radio Reception Are Explained Here in Simple Terms—Why They Stop Distortion and Give Better Tone Quality

By ALFRED P. LANE

Testing detector circuits with vacuum tube voltmeter in Popular Science Institute Laboratory.

**M**UCH will be said this year about the "power detector" tube as an important feature of a modern radio receiver. And many persons will get the impression that a "power detector" is some sort of a super detector circuit, far more sensitive than the ordinary hookup. That—to put it broadly—is exactly what a power detector circuit is *not*.

Considered in one way a detector tube is, perhaps, the most important tube in any radio receiver. In fact, the first vacuum tube receiver had only one tube, the detector tube. The tubes added later on, as the radio receiver reached a higher state of perfection, simply helped the detector tube to do a better job. Radio-frequency amplifier tubes were added to make the signal stronger before it reached the detector tube, and audio frequency amplifier tubes were added to take the output of the detector tube and bring it up to loudspeaker strength.

The term "detector" really is a misnomer. The detector tube does not actually detect anything. It functions as a rectifier tube and the practical result of its operation is to disentangle the audible electrical frequencies carried by the radio wave from the inaudible high frequency carrier portion of the wave, and this result is accomplished mainly by rectification.


**T**HE transmitter in the broadcast station produces a carrier wave which oscillates or vibrates at tremendously high frequency. Within the broadcast band of wave lengths the frequency may be from 1,500,000 to 550,000 cycles a second. The carrier wave is represented in the diagram at the top of Figure 1. Sounds produced in the broadcast studio are picked up by the microphone, translated into equivalent electrical vibrations, and then impressed on the carrier wave with the result shown in the central diagram.

Thus modulated by the audible frequencies, the carrier wave produces in your radio antenna equivalent, but very weak, electrical oscillations. These are amplified in the radio-frequency amplifier


stages of the set and then fed to the detector tube. The detector tube suppresses current flowing in one direction and passes along the sound frequencies to the audio amplifier stages in the set, as shown in the bottom diagram of Figure 1, below.

Obviously the best detector tube is one that most completely performs its job of rectification and that passes the electrical equivalent of sound to the audio amplifier stages without distortion or additions of any kind.

The standard circuit which has been used for years to make a vacuum tube perform its function of detection or rectification includes the familiar grid condenser and grid leak. In this circuit, shown in Figure 2, the tube operates by what is known as the grid rectification method. It is the most sensitive radio detector circuit and is, therefore, the best

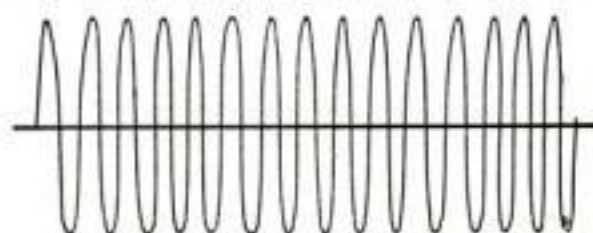

RADIO CARRIER WAVE

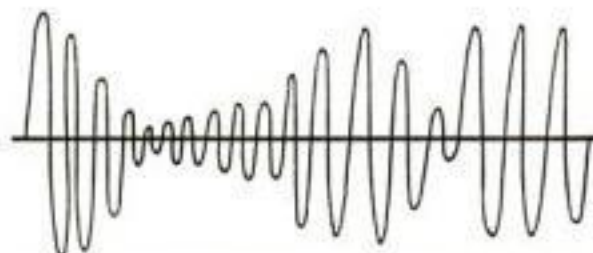

RADIO CARRIER WAVE WITH AUDIBLE VOICE VIBRATIONS IMPRESSED ON IT



DETECTOR TUBE SUPPRESSES CURRENT FLOW EXCEPT IN ONE DIRECTION AND ELECTRICAL EQUIVALENT OF SOUND VIBRATIONS IS PASSED ON TO AUDIO AMPLIFIER

Fig. 1. Diagrammatic representations showing how radio signals are transmitted and detected.

when only one tube is used in the receiver or when the radio-frequency amplification is of a relatively low order.

It has, however, two important disadvantages. First, there is a tendency to drop or lose the higher audible frequencies, and these frequencies are quite important because they include the higher overtones by which the tone of one musical instrument or voice is distinguished from that of another. Second, it will not handle loud signals without distortion. If a powerful signal is fed to a detector tube connected in the grid condenser-grid leak circuit, the functioning becomes faulty, with the result that music becomes distorted and speech may be garbled almost beyond recognition.

**B**Y CHANGING the electrical specifications of the grid leak and grid condenser it is possible partly to compensate for these disadvantages, but unfortunately such changes will greatly reduce the sensitiveness of the tube. For instance, it is possible to prevent the loss of the higher audible frequencies by reducing the capacity of the grid condenser. But this still further reduces the tubes' ability to handle a strong signal. Moreover, lowering the resistance of the grid leak to make it handle the stronger signals makes the tube very insensitive to weak signals.

Until the present year, therefore, radio listeners have lived between the devil of distortion and the deep sea of weak signals. However, recent advances in the design of radio-frequency amplifier stages, and particularly the introduction of the new screen grid tubes, have made it possible to adopt a detector system which, although relatively insensitive, will handle any desired amount of power without distortion. The tremendous radio-frequency amplification now possible more than makes up for the lack of sensitiveness in the detector tube circuit.

**T**HIS new and desirable "power detector" circuit is technically known as the plate rectification method. In diagrammatic form it looks exactly like a radio-frequency amplifier circuit. The tube acts as a detector instead of as a radio frequency amplifier partly because of the difference in the ratio of the plate voltage to C bias, and partly because of the different arrangement of the plate circuit, wherein a radio-frequency choke and by-



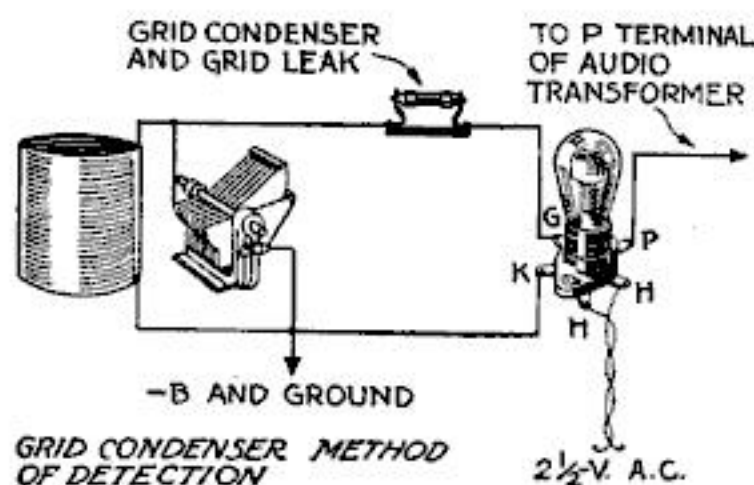


Fig. 2. For years this has been the standard circuit for vacuum tube detection. Now new methods are replacing it.

detector tube feeds directly to the last or power audio amplification stage. Both methods produce practically the same result, because the hum heard from the loudspeaker is determined by the degree to which the impulses from the detector tube are amplified.

Any grid condenser and grid leak detector circuit can be converted into a power detector circuit merely by removing or short-circuiting the grid condenser and grid leak, increasing the plate voltage, and arranging for a proper grid bias.

In the power detector circuit, if the plate voltage is 45 volts, the C bias should be  $4\frac{1}{2}$  volts. If the detector plate voltage

pass condenser gets rid of the radio-frequency component of the wave.

Great power handling ability of the power detector circuit, coupled with the tremendous radio-frequency amplification, makes it possible to reduce the audio amplification. This cuts down the possibility of distortion in the audio amplifier circuit and, coupled with the more accurate detection of the power detector circuit, results in better tone quality from the loudspeaker.

In addition, cutting down the audio amplification materially reduces the A. C. hum so that the modern full electric radio receiver is practically hum-free even when working with a dynamic speaker that puts on the air the lower audio frequencies which include the A. C. hum.

Though A. C. hum may originate in many different ways in a full electric receiver, most of it comes from the detector stage, as this is the first tube in the receiver operating at audible frequency. Generally speaking, little hum originates in the radio-frequency stages of the set, since the radio-frequency stages do not operate at audible frequencies. Hum is caused by the radio-frequency stages only when they are over-biased or are being operated too close to the oscillation point.

**P**ROBABLY you have noticed a distinct hum when you tune in a broadcasting station, particularly a powerful one, if the announcer is off the air for the moment. This hum is frequently attributed to the carrier wave of the broadcasting station. Actually it may be caused by one or the other, or perhaps both, of the conditions in the radio-frequency stages of such a receiver.

Any A. C. hum from the detector stage receives the full amplification of the audio amplifier stages before it reaches the loudspeaker. Consequently the greater the audio amplification, the louder will you hear any given amount of hum that comes from the detector tube. Reducing the amount of audio amplification automatically cuts down the hum. In many of the modern receivers the audio amplification is reduced by using lower ratio audio transformers. In some of them, the first audio stage is eliminated entirely and the power

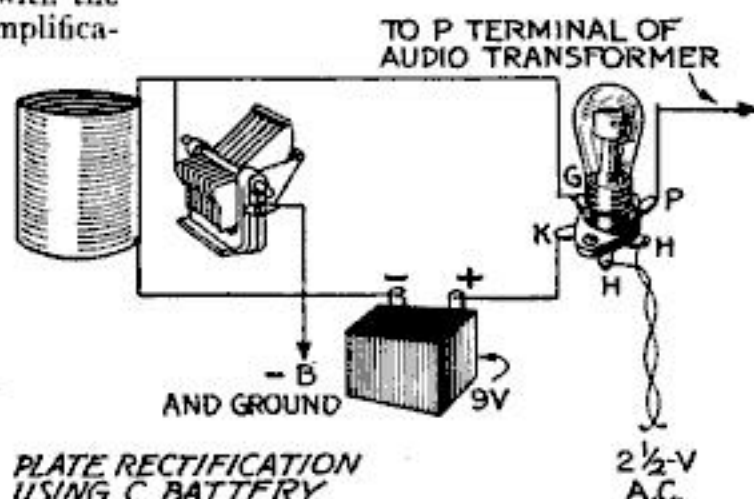


Fig. 3. The best possible way of obtaining the C bias voltage for the power detector.

is 90 volts the grid bias should be 9 volts, and if the detector plate voltage is 180 volts the grid bias voltage should be 18 volts. If the power detector is to be used with a two-stage audio amplifier it is not worth while to increase the detector plate voltage beyond 90, because a power detector tube operating on 90 volts on the plate with 9 volts C bias on the grid will handle more power than can be taken care of without distortion by a two-stage audio amplifier. However, if the power detector feeds directly into the power audio stage with the first audio stage eliminated it is desirable to use the higher voltage on the detector tube, that is, 180 volts on the plate, and 16 to 18 volts for C bias.

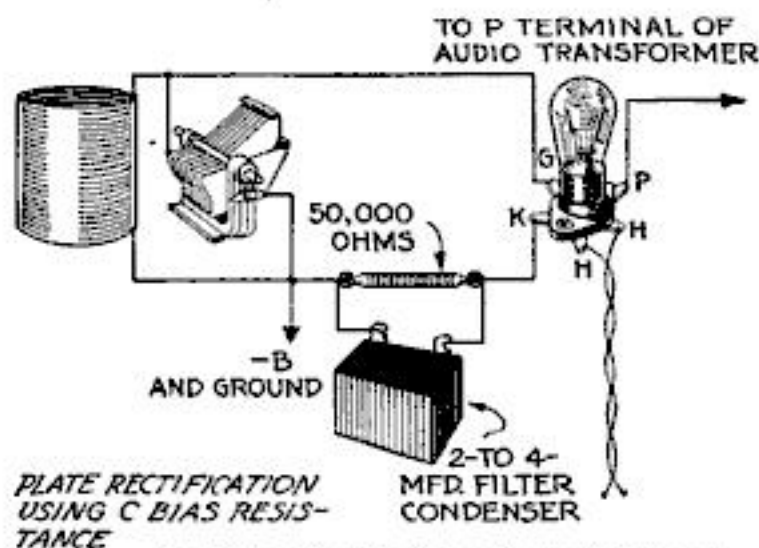


Fig. 5. A method that is used extensively in commercial receivers. It gives satisfactory results.

Figures 3, 4, and 5 show three forms of the power detector circuit. They are identical except in the method of obtaining the necessary C bias. All of these diagrams show the use of the UY-227 A. C. heater type tube. In Figure 3 the necessary C bias is obtained from a C battery. This is the best possible method, and we recommend it to those of our readers who wish the finest results. A by-pass condenser should be connected across the leads to the C battery, unless the latter is mounted in the set.

**F**IGURE 3 also shows the correct method of operating a 201A storage battery tube in the power detector circuit. The plus terminal of the C battery is connected to the minus filament terminal of the tube socket, and minus B is, of course, connected as in the usual battery hookup—that is, either to plus A or minus A, instead of as shown in Figure 3.

Figure 4 shows the C bias obtained by the use of a high resistance variable resistor and a very large capacity filter condenser. This method will give as good results as can be obtained from the dry cell C battery method, only if a very large condenser is used and if the B eliminator has a very efficient filter circuit.

Figure 5 shows the C bias obtained by the use of a grid biasing resistance in

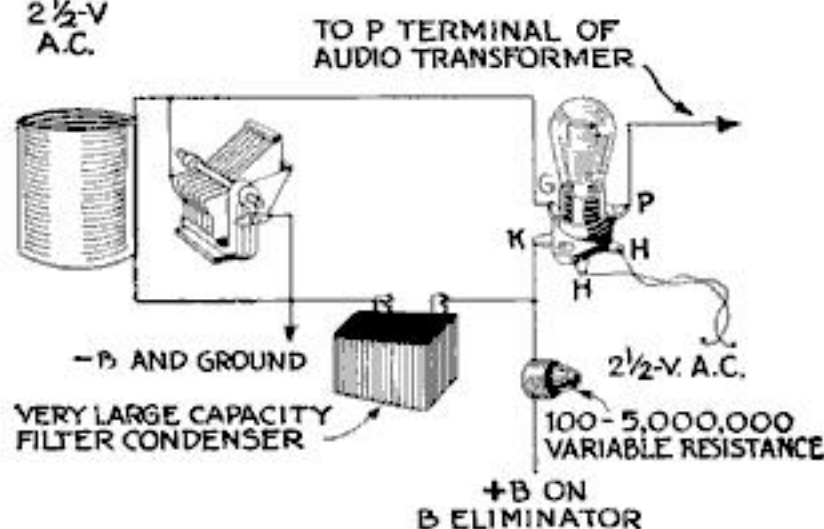


Fig. 4. To obtain hum-free results with this method, it is necessary in building to use a filter condenser of very large capacity.

exactly the same manner as the grid bias is obtained in the audio and radio amplifier circuits. Note that 50,000 ohms resistance is used. This resistance will be approximately correct regardless of the plate voltage applied. Increasing the plate voltage will increase the plate current flowing through the grid biasing resistor, and consequently result in an increase in the C bias voltage. This method of obtaining the C bias in the power detector circuit is used extensively in commercial sets and gives satisfactory results.

**W**HEN the C bias is obtained in this way, the stronger the carrier wave, the less effective is the tube as a detector. This means that there will be less difference in the volume between a powerful, local station and a distant, weak station, than is the case when the C bias is obtained from a separate battery. Since, however, it is usually necessary in any case to turn down the volume control on local stations, this peculiarity is of minor importance.



## *Useful Hints for the Radio Fan*

# Special Pliers Simplify Wiring

*Three Handy Tools for Set Builders—New Standards for Measuring Sensitiveness—Simple Ways to Test Voltage*

**I**N WORKING on a radio receiver, exasperating jobs that are almost impossible to get at with bare fingers become easy if the fingers are supplemented with proper tools. The illustration on this page shows three of the most useful tools in radio. At the left is a pair of duck-nosed or flat-nosed pliers designed for reaching into a tight place to hold a short piece of wire firmly. Incidentally these pliers are not sensitive to temperature, so that in making a solder joint a wire can be held at a point close to the soldering copper. Pliers of this type also make it easy to reach in and bend the end of a wire for a joint, or to recover a nut, bolt, or other small part that has fallen into an inaccessible part of the set.


The special pliers shown in the center are designed solely to cut wire. The cutting angle and the size and shape of the jaws are such that they can be used where the ordinary heavy wire-cutting pliers will not reach the work. If, for instance, it becomes necessary to solder a short piece of wire, say an inch long, between two terminals that are close together, a long piece of wire can be used to make the solder joints, and then with these pliers the excess wire can be cut off cleanly.

Pliers of this type also are extremely useful in stripping the insulation from the flexible enameled fabric and rubber-insulated wire popular for radio work. With practice, a ring may be pinched around the insulation at the point where it is to be parted; then the insulation may be stripped off. With a knife the job would take three or four times as long.

The small round-nosed pliers at the right are useful in forming a neat loop in the end of a stiff wire to fit over a binding post or in making neat rectangular bends. They are handy also for holding work and in various assembling operations.

### *Measuring Sensitiveness*

**I**N THE early days of radio, manufacturers of receivers, as well as enthusiastic home constructors, made all sorts of absurd claims for the sensitiveness and distance-getting ability of their sets. Within the last year, however, radio and electrical engineering societies have worked out a standard method of testing the sensitiveness of a receiver. It is now possible to determine exactly how sensitive any set will be under any

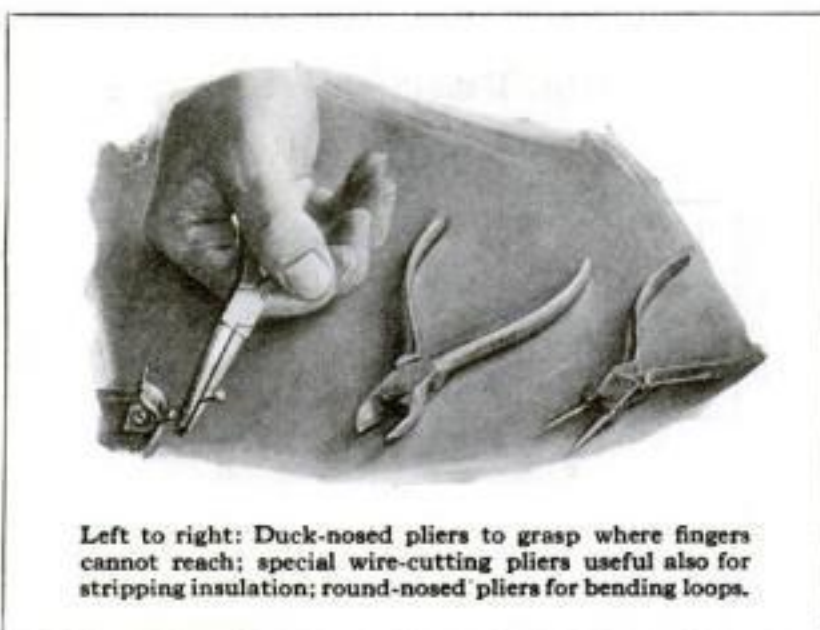

Left to right: Duck-nosed pliers to grasp where fingers cannot reach; special wire-cutting pliers useful also for stripping insulation; round-nosed pliers for bending loops.

given conditions, assuming, of course, that these conditions are known.

The strength of radio signals produced in any given location by a broadcasting station is measured in microvolts per meter. A microvolt is the millionth part of a volt. If, for instance, it is found that a certain station produces, in a certain locality, a field strength of ten microvolts per meter, it means simply that the

radio signal brought in by an antenna in that location will have a strength of ten microvolts for each meter of height of the antenna. Thus, if a receiver is rated at ten microvolts per meter it means that, with a field strength of ten microvolts per meter, it will give a standard loudspeaker signal. Another receiver capable of giving a standard loudspeaker signal with a field strength of only five microvolts per meter would be twice as sensitive as the first set, or if it requires twenty microvolts per meter to produce a standard loudspeaker signal the receiver would be only half as sensitive as the first.

The sensitivity of modern receivers is improving. The average radio receiver of a year or two ago required a field strength of approximately thirty microvolts per meter. The average of this year's higher grade receivers will give a standard loudspeaker signal when the field strength is slightly less than ten microvolts per meter.

### *Testing High Voltages*

**M**ANY radio experimenters have voltmeters designed for testing B eliminators having a maximum reading of not more than 250 volts. Such a meter, cannot, of course, be used directly to measure voltages higher than the maximum for which it is rated and consequently would seem to be almost useless in testing voltages in a circuit using 210 or 250 power tubes. Such tests can be made accurately, however, by measuring the voltages across the various steps of the fixed resistance and then adding these voltages together to get the total. Measure from the minus B end of the resistance to the point that gives a reading somewhere near the maximum of the meter. Then, with the minus end of the meter connected at the latter point, connect the plus end of the meter to the plus end of the resistance.

With a low voltage meter it is possible also to determine whether the proper plate current is flowing in the power tube. First determine the plate current as already outlined and then measure the voltage developed across the grid biasing resistance. The value of this voltage is determined by the amount of plate current flowing. If both the plate current and the grid biasing voltage are correct it is absolutely certain that the plate current flow also is correct.

### *A B C's of Radio*

**T**HE tuning circuit in a radio receiver always consists of electrical inductance in the form of a coil of wire connected across electrical capacity in the form of a variable condenser. The wave length or frequency to which the circuit is tuned is governed both by the electrical inductance and by the electrical capacity.


Increasing the inductance, which means adding turns of wire to the coil, tunes the circuit to a longer wave length or a lower frequency. Increasing the capacity, which means engaging the plates of the variable condenser to a greater degree, has the same result. Reversing either of these operations—that is, reducing the inductance by removing turns from the coil or reducing the capacity by disengaging the plates of the condensers—results in tuning the circuit to a shorter wave length or a higher frequency.



# Guarding the Set from Blow-outs

## A Few Simple Precautions Save Radio Apparatus from Short Circuits and Fires

By JOHN CARR

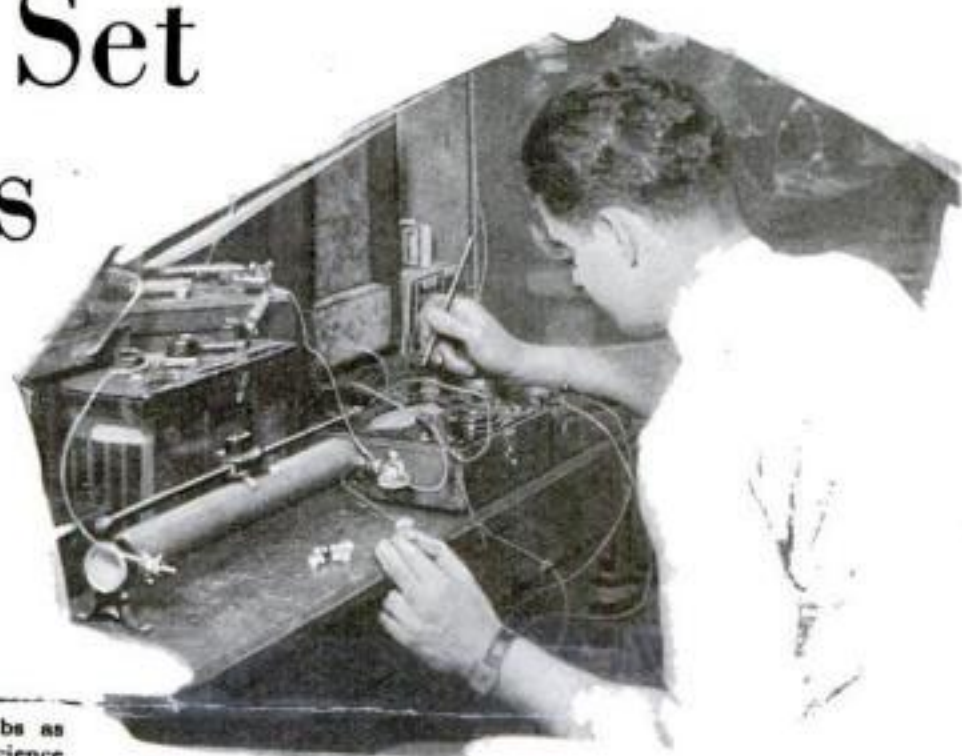

Testing flashlight bulbs as fuses in the Popular Science Institute radio laboratory.

**E**LECTRIC current is an obedient and tireless worker when properly controlled, but if a breakdown permits it to flow outside its normal path valuable apparatus may be ruined in the twinkling of an eye.

A radio receiver may operate smoothly and without trouble for months or even years and then, without warning, insulation may give way and a short circuit may turn valuable apparatus into smoking scrap metal, perhaps setting fire to the whole set.

Such accidents never can happen to receivers properly protected against short circuits. Modern factory-built receivers are so protected. Any excessive flow of current in the circuits immediately blows a protecting fuse and the current is shut off before it can cause damage.

The operation of a fuse is based on the principle that a chain is no stronger than its weakest link. The current-carrying capacity of the fuse is so chosen that it will be the weakest link in the circuit. When excessive current flows, the fuse will be burned away, opening the circuit before any other wire is affected.

**T**HE fuse in a commercially built receiver usually is connected in the wire leading to the primary winding of the power transformer. This is the point at which the current enters the set, and the capacity of the fuse is so chosen that it will pass all of the current that can be used in the set under normal operating conditions. If the filament of a rectifier tube burns out and the end of the filament falls over and short circuits against the plate, a large flow of current is permitted in the secondary circuit of the power transformer. This flow can only be produced by an increase in the flow of current in the primary circuit and the fuse blows at once, shutting off the current. Or it may be that one of the filter condensers short circuits. In that case the flow of current is greatly increased, with the same result.

It is entirely practicable to protect any home-built receiver or power amplifier unit against a serious burn-out. And it pays. A study of the current flow possibilities will show how to do it.

Any electric receiver or power amplifier unit includes what is known as the primary circuit. This consists of one or more primary windings, the switch that turns the current on and off, and the cord which plugs into the electric light socket. Primary windings are so thoroughly insulated from all other circuits in the receiver that there is little chance of a short circuit between them. If a short circuit occurs between the cord and the metal frame of the set or the grounded core of the transformer, the fuse in the house lighting circuit will blow before damage is done, provided, of course, that the fuse is of low current-carrying capacity. If, however, the receiver is used on a line carrying considerable normal load and the current-carrying capacity of the fuse is too high, a fire will be started inside of the set before the line fuse blows.

**T**ROUBLE of this kind can be prevented by inserting a fuse block in the lead wire that goes to the socket, as shown in the illustration. Because it is impossible to tell which side of the 110-volt lighting line is grounded, it is desirable to use a fuse block containing two fuses, so that both wires in the drop cord will be protected. Use no larger than 3-ampere plug fuses.

In a battery-operated receiver the use of a 3-ampere fuse block between the storage A battery and the set is desirable. The fuse block should be connected close to the storage battery to protect against


short circuit in the wires leading to the set, as well as possible short circuits in the filament wiring.

The most effective fuse for use in the high voltage B eliminator circuit or power amplifier unit is the flashlight bulb. Tests were conducted recently in the Popular Science Institute of Standards radio laboratory to determine the current-carrying capacity under normal load of all types of flashlight bulbs, and also the current flow at which the filament of each burned out. The common types of flashlight bulbs are rated at 2.2 volts, 2.5 volts 3.8 volts, and 6.2 volts, but the current-carrying capacity of these various bulbs under normal load was found nearly uniform, regardless of the voltage. The 2.2-volt bulb carried .26 amperes and the other bulbs varied between this and .30 amperes. It is safe, therefore, to use any standard flashlight bulb of any standard voltage rating in a circuit carrying not more than 250 milliamperes. All of the bulbs burned out at current flows ranging between .34 amperes and .49 amperes.

**T**HE chief advantages of a flashlight bulb as a fuse are that the burn-out occurs almost instantaneously, there is no arcing effect, and the wiring, therefore, is completely protected. The illustration shows the ideal method of using flashlight bulbs on the high voltage leads from the transformer in a B power unit. If a rectifier tube burns out and the filament short circuits against the plate, the flashlight bulb will blow out instantaneously and no damage will be done. As the normal flow of current will make it glow, the bulb also serves the purpose of an indicator to show that the current is flowing in the circuit.

The owner of a battery-operated receiver will find that a flashlight bulb connected in each B lead to the set will prevent his batteries becoming run down due to a short circuit, and also protect the filaments of his radio tubes if by accident the B wire is connected to the set in the wrong position, that is, if the plus B wire is connected to the plus A binding post.

### POWER TRANSFORMER OF B ELIMINATOR CIRCUIT

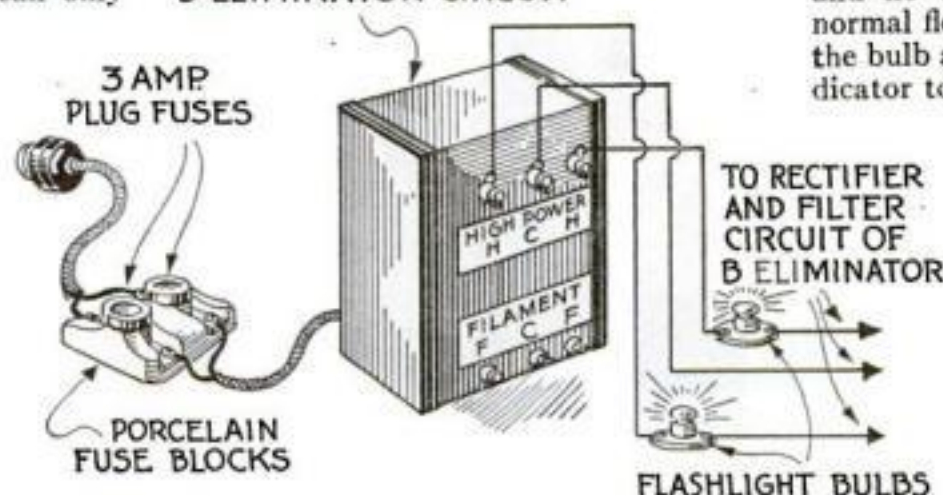

This diagram shows how to use flashlight bulbs and plug fuses in order to protect the B eliminator circuits of a radio receiver from costly burn-outs.



# A New Slant on House Painting

**T**O BOB KERSEY, paint was merely for decoration, or to freshen things when they were shabby. That there was more to it first occurred to him when he found his friend, Tom Sands, all worked up because something was the matter with the paint on his garage.

"Look at that!" growled Tom. "It's coming off like white wash!"

"Well," inquired Bob innocently, "can't you have it painted again?"

Tom glared at him. "Of course I can, and that's what I've got to do, hang it! I paid \$50 for that job only eight months ago, and it should have lasted four years. Now I've got to pay another \$50 to have it done over again. S'pose it was your paint that had gone bad; how'd you feel?"

Bob's interest blazed up. "Say," he said, "you hit me there. There'll be a lot of paint on that house I'm going to build. What made this paint come off, anyway?"

"Search me; but I'm going to find out. I called up the man who sold it to me, and he said he'd come out."

Half an hour later the paint man arrived. Tom was none too cordial. "I suppose you'll blame everything but the paint," he said with heavy sarcasm.

"You're right," answered the paint dealer. "That paint is as good as there is. I've been handling it for years. Did you put it on yourself?"

"No, my odd-job man did it. He said that he'd painted before; so I told him to go to it. He's no expert, but I can't see that it takes much brain to swing a paint brush."

**B**BETTER change your mind on that, Mr. Sands; this job's proof of it. My books show that you bought the paint in October. Wasn't there a rainy spell about that time?"

"There sure was. It began to rain the day I bought the paint, and it rained for a week. I wanted to get the job done before cold weather came, and the man started as soon as it cleared."

"Yes, and there's one of your troubles. If he'd been a painter he'd have known better than to put paint on wet wood; he'd have waited at least two days for it to dry out. When you put paint on dry wood it strikes into the pores and hardens with a grip that holds it there; but with the pores as full of water as they were when that bright man of yours went to work, the paint just lay on the surface.



The house the Kerseys plan to build—"too good for a poor paint job." By courtesy The Home Guild of America, Architects.

And here's another thing. Was the paint for the first coat used as it came from the can?"

"Why—I don't know. But why not? It was ready to use,

wasn't it?"

"Yes, for the second coat; but for the first it should have been thinned. It would have worked into the pores better and taken a tighter grip. The priming coat—the first coat, that is—should always be thinned with turpentine when the wood is hard and sappy, and with linseed oil when it's soft and spongy. That first coat is the foundation for the whole job, for it has to hold the other coats. As it came from the can the paint was too thick to strike in as it should, and when the sun began to pull the moisture out of the wood the paint came with it."

The evidence was so clear that there was nothing for Sands to do but write off the loss and charge it to experience. The episode so impressed Bob Kersey, however, that he lost no time in telling his architect about it.

**W**HY does the paint on one house go to pieces in a few months, while on another it lasts for years? In this article an expert gives the answer.

For free advice on your painting problems, write to the Building Service, Popular Science Institute, 381 Fourth Avenue, New York City.



By ROGER B. WHITMAN



This photograph shows what happens when woodwork is exposed to the weather without paint protection. It very quickly decays.

**T**HAT'S what you get when you do a paint job on the cheap," was the architect's comment. "It isn't only the way the paint is put on, either; the quality of the paint counts, too. Some paints will last for years and others will begin to go bad in six months. The real purpose of paint is to protect the material underneath from rotting and going to pieces. You know what happens when you put iron or bare wood out in the weather; the iron will rust, and the wood will split and warp and rot from being soaked and dried, and from the freezing of absorbed water that tears its fibers. Fill the pores with paint so that water can't get in, and they'll last almost forever. The more carefully the paint is put on, the more thoroughly the pores will be filled; and the better the paint, the longer it will last. If there's any one place where you save money by spending it, it's on a paint job. See what your friend Sands got. With good work, his \$50 paint job would have lasted four years, making the cost \$12.50 a year. If he keeps on the way he's started, though, it will cost \$50 a year."

"If you want to learn something about paint, go and see Jim Martin. He's been a painter all his life and knows more about it than anyone around here."

Bob dropped in on Martin one after-



noon, and found him breaking into a keg of what looked like white paste. "What's that?" he asked. "White lead," the painter answered. "I'm just going to mix up some paint."

"I never saw paint as thick as that."

"Sure, young man; this isn't paint yet, it's only the beginning of it. Got to put in the oil and turps and drier, and then I'll have it."

"Say, I'd like to know something about it," said Bob. "I was telling my architect about the paint I saw coming off a garage. What is it about paint that makes it good or bad?"

**J**IM beamed with pleasure at having an auditor. "The materials; same as anything else. You can't make a good cake with old eggs and poor flour, and you can't make good paint if the oil and the other parts aren't right. You see, it begins with linseed oil. Spread that on anything and it hardens into a waterproof film. There's no body to it, though, and it wouldn't last long; so you mix it with white lead, zinc oxide, and other things that'll hide the surface you spread it on, and that'll let you brush it. If you use good stuff and mix it right, and do a good job of painting, it'll be years before weather can get through it; but with no-good oil and not enough of the parts that count, it'll begin to go as soon as you put it on."



"When you buy cheap paint you'll be doing the job over again in a year or so, and that's what runs up the cost. I did a job last week that took \$35 worth of paint, and the labor of putting it on cost \$60. That was \$95 for the job, and it'll last a good five years; \$19 a year. The owner could have saved \$1.25 a gallon on the paint, and the job would have looked just as well when it was new; but in two years it would be gone and he'd have it to do all over again. Cheap paint costs as much to put on as good paint; so the job would have cost \$72.50 instead of \$95. But doing it over in two years would have been \$36.25 a year, and that's pretty expensive."

"**C**HEAP paint is the worst economy I know. It doesn't last and it won't go so far; you have to use more of it. I've tried that out, and I know. A couple of years ago I had to paint my barn. On one side I used the best paint I could make. I figured that it cost \$3.50 a gallon, and it took five gallons. The paint I used on the other side cost \$2.25 a gallon, and I give you my word that I had to use eight gallons of it. So it took \$18 worth of cheap paint to go as far as \$17.50 worth of good paint, and I had the extra work of putting on three more gallons."


"Why do you mix your own paint when you can get it in cans?"

A shingle roof gone to ruin. The cost of painting the shingles every few years would have been far less than that of replacing the decayed roof proved to be.

Bob Kersey's interest in painting began when he saw paint peeling from his friend's garage, as shown below, and learned that poor workmanship did it.

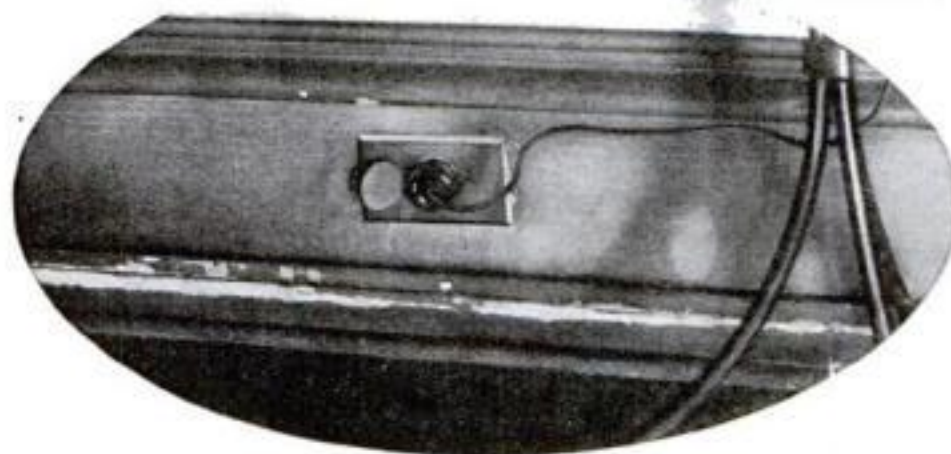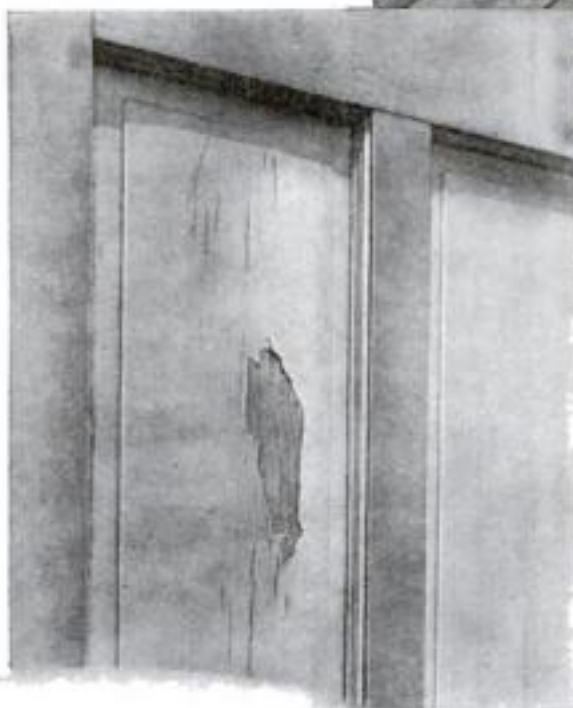

Paint is here shown peeling from a baseboard. Such failure may be due quite as much to poor application as to low quality of the paint.

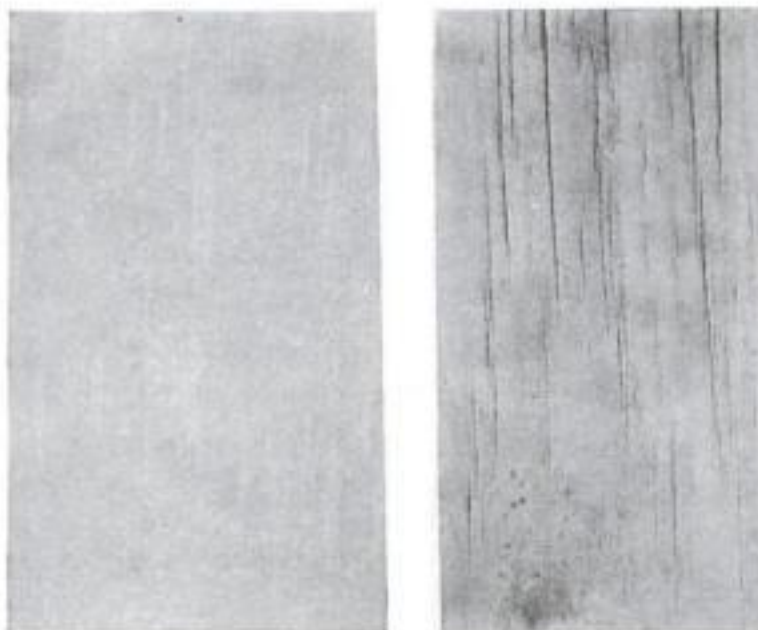

Three months' exposure had no effect on the high quality paint on left panel, but ruined the poor paint at right.

"Habit, I guess. And I can get just what I want. But you see, I'm an old hand at it. I'd advise anyone else to buy it ready mixed, providing they know what they're buying. I've seen ready mixed paint where the liquid part tested twenty-five percent water, and with only one quarter of the linseed oil it should have

had, and poor oil at that. The cheapest paint is the one that costs most, because it has better materials, better mixed. It goes further and lasts longer. But how is it you're so much interested in paint?"

"Well, there'll be a lot of painting in a house I plan to build, and I want to find out about it before I start. I'd like you to do the job, and we might as well begin to talk about it. Here are the plans."

**M**ARTIN looked them over. "Nice house," he said. "Too good to do a poor job on. I warn you, there'll be painters who will paint it for less money than I will; but I'll guarantee to give you a job that'll last."

"But what will you do that the other fellows won't?" Bob inquired.

"Make the paint suit the work, for one thing, and put it on exactly right for another. Every knot and sappy place in the boards will get a good coat of shellac to keep the sap from staining the paint. Ever see a knot showing through paint? That's what I mean; the sap wasn't sealed in. There'll be a priming coat mixed for the kind of wood it goes on, and when it's dry, the nail holes and cracks will be filled with whiting and white lead putty. The second coat will be mixed with turps

and oil half-and-half, and the third coat'll be mostly oil. That's the kind of a job that lasts. How are you going to finish the inside?"

"Wall paper in the bedrooms and the dining room, and panels of fancy paper in the living room, with the rest of the walls painted. The library is to be paneled oak; everything else in the house painted."

"**P**AINT on the trim and doors, eh? If you give me the job, I'll paint the back of the trim before it goes on; give it a good priming coat."

"I don't get you." Bob was puzzled. "You mean that you will paint the back of the woodwork around the doors and windows? What's the good of that? Nobody sees it."

"Maybe not; but I'd paint it, and the backs of the baseboards and the moldings, too. You see, if you leave them bare they'll absorb moisture in damp weather and give it up in dry, and with swelling and shrinking you'll get open joints and cracks. But if they're sealed all over they'll stay put. The edges of all the window sash will (Continued on page 157)



# Latest Helps for the Homemaker



Electric appliance cords are adjusted to any length desired with this handy device, which accommodates wires of four sizes.


Rubber bumpers on the edge of the push broom at right prevent marring of furniture. The handle is reversible, permitting the use of both sides of bristles. It is twice the width of an ordinary broom.



Dipping a cloth in the gas tank to remove spots from clothes is just one job for these novel tongs, which can reach into small-necked bottles, hold nails for overhead driving, or lift off the hot covers from kettles.



This new shoe-shining device works like an automobile grease gun and is very handy. A twist of the top forces cream from its hollow handle onto a swivel brush, which is then used to polish the shoe.

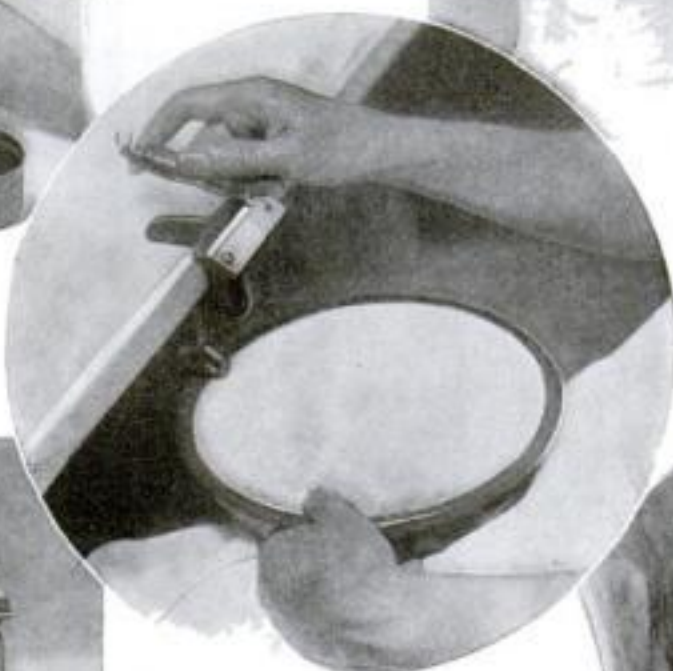


The bean stringer above clamps to the table. Running the shell along the knife slits it open and deposits the string in a bowl that is held underneath.



The latest in clothespins are unbreakable ones of rustless metal, said to hold clothes in a bulldog grip and to last for years. Small and easy to handle, they will not soil nor tear the flimsiest of garments.



A new jar opener of hardened steel, with enameled handle, will tighten or loosen screw covers on jars or bottles of any size. The two raised arms of the instrument fit so snugly on the cover that no heavy pressure is needed to remove it, and there is no possibility of breaking the container.

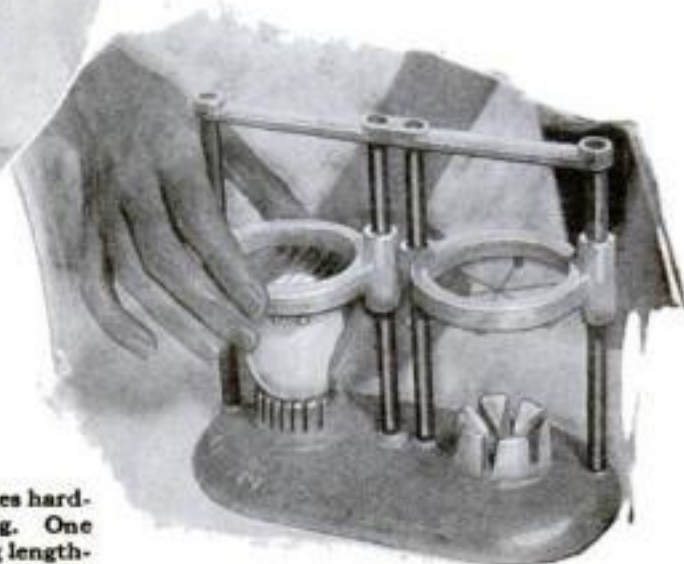

The egg cutter at the right slices hard-boiled eggs for salad making. One side of the device splits the egg lengthwise, while the other cuts it radially.



# What Inventors Are Doing to Lighten Household Chores and Add New Conveniences in Every Room



The day's milk is protected from heat and cold by a new outdoor "safe," constructed of insulating fiber. The box will hold three bottles so snugly that there is no danger of tipping or spilling.



A removable heating compartment that can be used as a bathroom heater is a feature of the electric laundry drier above. It is used to dry lingerie, and garments that commercial laundries might injure.



The breeze from the whirling blades of this new electric fan is deflected horizontally in all directions by the cone-shaped top. You can't catch cold from its breeze, the maker claims, as there is no direct draft playing upon you wherever you are.



Washstand faucet (left) becomes drinking fountain when nozzle is reversed (above). For washing, hot and cold water can be mixed in any proportions, as required.



The portable ironing board for travelers, shown above, is only eighteen inches long when folded in two. It has a wooden frame covered with aluminum, over which fits a fleece-lined cover. It is carried in a black leatherette case and takes up but little room.



When not being used to warm a room, the electric heater above is turned up to make a convenient stove, as shown at the left.



The device at the left cuts beans into short lengths for soups and salads, saving the housewife's time. After stringing the beans, insert them into one end of the machine and turn the crank; they will issue from the other end neatly cut, ready for use.



### A Breeder of Quail

NOT long ago, W. B. Coleman left the employ of the state of Virginia after serving since 1919 as official breeder of quail. In those ten years, Coleman raised more than 20,000 bobwhites on the first and largest farm in the world devoted to the breeding of those shy, wild game birds in captivity. Last season 8,448 quail were hatched, 5,000 of which were grown. All of those birds, as well as their 15,000 predecessors, were liberated on the Virginia game sanctuaries.

Coleman has reduced the breeding of quail to a science and an art. For many years he has studied their habits of feeding and propagating and has carried on researches to find means of protecting them from vermin, snakes, and birds of prey.

As in many other cases of specialization, Coleman's absorbing interest in quail was aroused by accident, and at first he did not dream that raising the birds would come to be his life work. It all began some sixteen years ago, when he was recovering from a severe injury on his family's tobacco farm in Amelia County, Va. During his convalescence, he reverted to a pastime of his boyhood—hunting bobwhite. But all he could find in a long day's tramp would be about six or eight coveys of the birds compared to twenty-five or thirty in a similar period when he was a lad.

It was plain that the quail were disappearing. Although the state game laws protected them by providing a short hunting season and a bag limit, as well as prohibiting their sale for food and restricting shipment, the increasing number of hunters, together with the depredations of hawks, owls, crows, snakes, and other natural enemies, proved too much for them.

Something, Coleman felt, ought to be done, and he had no sooner recovered from his illness than he set about doing it. That year he raised sixty quail on the tobacco farm by setting under bantam hens eggs from six pair of wild quail he had trapped.

In the fall, he exhibited nineteen of them, with their chicken foster mother, at the Virginia State Fair. The exhibit attracted wide-spread attention among sportsmen and bird-lovers throughout the South. As a result, Coleman was given the job of raising quail on the 66,000-acre game preserve of the Okeetee Club of Switzerland, S. C., one of the most exclusive sportsmen's organizations in the country, where he carried on his work with marked success for the next five years.

Following the severe winter of 1917-18,



W. B. Coleman, shown holding quail eggs and baby quail, breeds the birds scientifically to save them from extinction.

## Glimpses of Unusual Men

when thousands of quail died of starvation, the Virginia State Game Department placed an order for 4,000 Mexican birds. The shipment did not arrive, and it was suggested that the state raise its own bobwhite. The department heads were doubtful of the plan's feasibility and were at a loss as to whom to select for the task. M. D. Hart, now Virginia Game Commissioner, was familiar with Coleman's experiments and proposed him for the job.

Coleman first selected a location for the farm, which he established at Boulevard, about twenty-five miles southeast of Richmond, on the banks of the Chickahominy River, where, according to legend, the Indian Princess Pocahontas saved the life of Captain John Smith. Then pens and breeding houses were built under his direction and the work was started.

COLEMAN was responsible for several innovations in quail breeding, among them the use of the incubator and the brooder, and of the cock bird to mother the young. But probably the most remarkable thing he did was to change the bobwhite from a monogamous into a polygamous creature. In the wild state, the male quail has only one mate. Coleman introduced the customs of the hen-house among the birds, mating a dozen hens with four cocks. The new system proved a great success for, while the individual hens laid fewer eggs under the changed conditions, the total of fertile eggs obtained was considerably larger.

At present, Coleman is manager of the Coleman Experimental Quail Farm near Richmond. Here he devotes his efforts mainly to devising methods whereby quail may be bred in captivity at the lowest possible cost.

### An Explorer-Merchant

WHEN members of the Morden-Graves expedition of the American Museum of Natural History sailed for northern Asia in search of the long-haired tiger of the Amur River jungles, they took with them equipment from a little shop in the shadow of the Woolworth Building in New York City.

Here, amid the bustle of the Manhattan money marts, are sold the tools of romance and adventure. Men whose names are synonymous with the thrill of exploration, among them Commander Byrd, Sir Hubert Wilkins, Captain Dyott, and the late Theodore Roosevelt and his sons, Theodore and Kermit, have visited the modest store before starting on their treks into the unknown. Its shelves and show cases contain parkas and sleeping bags to withstand the cutting cold of the Arctic; waterproofed tents to keep out torrential tropic rains; netting to protect the wanderer against the bite of venomous insects; dog sleds and snowshoes to take the traveler far into the frozen spaces of Polar regions; scientific instruments to guide him through trackless wastes of land, ice, or water; knives and guns to hunt wild beasts and ward off hostile natives.

But the men—and a few women, too—who call at this intriguing place do so not merely to be outfitted. They seek also valuable counsel. For the unique establishment is conducted by a man who is himself an explorer. He is Major Anthony Fiala, who participated in two North Pole expeditions, one of which he commanded, and who charted the Papagaio, Jur-uena, and Tapajos Rivers with the late Theodore Roosevelt on the famous "River of Doubt" expedition in Brazil.

It is difficult to imagine that the mild-mannered, gray-haired man with twinkling eyes and the patient, thoughtful expression of a scholar has ever been very far from his old-fashioned roll-top desk in the little New York shop. Yet he has had a career studded with thrilling experiences that rival the most romantic fiction.

Until he was twenty-nine, Fiala had led the




Colonel E. H. R. Green, wealthy son of Hetty Green. Airships are his latest hobby.



Major Anthony Fiala, "the explorers' quartermaster," himself an adventurer.

(Continued on page 147)



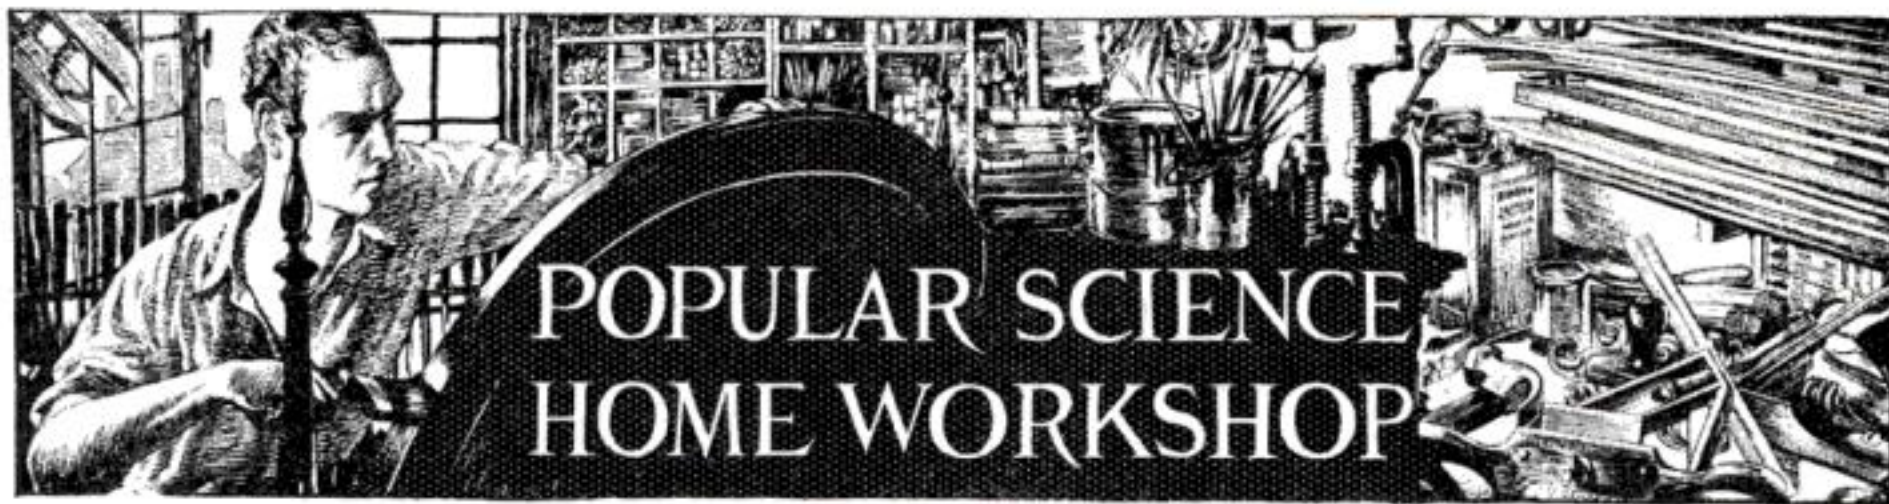

# Linoleum Carving—A New Craft

*How to Cut Designs for Decorating Furniture in a Material Much Easier to Work Than Wood*

By DOUGLAS LEECHMAN

**M**OST men who own a selection of chisels and gouges have promised themselves that they would do some wood carving "some-time," but the closer they get to the job, the bigger it looks. Linoleum carving—a new and fascinating craft—offers an excellent solution.

Linoleum is much cheaper than wood, it can be had in pieces of almost any size, it is easily and quickly worked, it does not warp, and, if a piece is spoiled, the loss is not very serious in either time or money. In wood carving the amateur can at first do relatively little, but in linoleum his early efforts are practically certain to result in presentable and highly decorative work.

The limitations of the material practically confine the craftsman to low relief carving, but the possible applications are numerous. Tiles, sides and tops of boxes, bookends, push panels for doors (which should be heavily varnished so that they may be washed), teapot stands (which are better carved but unpainted), vase stands with a decorated border showing round the foot of the vase, and even elaborate scenic and other wall plaques may be undertaken.

Furniture, however, offers perhaps the richest field. Inset panels for cupboard doors, the sides and tops of bookcases, magazine racks, the tops of occasional tables, door panels, drawer fronts, picture frames, ash tray stands, and many others suggest themselves as suitable for this form of appliqué decoration. Incidentally, an appropriately carved piece of linoleum would make a novel panel for a homemade radio set.

Now that furniture in modernistic shapes and colors has become so much the vogue, there is ample opportunity to apply suitable and effective decoration in this type of



Linoleum carving, reproduced directly from a panel 5 by 8 in. cut and colored by the author.

carving. When an understanding of the possibilities of this new craft is gained, there will be no difficulty in turning out work of striking appearance and considerable intrinsic value.

It is, of course, evident that the Northwest Coast Indian designs in the illustrations are given merely as examples, this type of art being particularly suitable to the work. The craftsman is free to develop his own ideas along any line which he may select, and the scope offered is wide.

The materials needed are of the simplest. A piece of linoleum of the required size, a sharp knife, a chisel, and some oil paints are all that you will find absolutely essential. A heavy grade of good quality linoleum is the most suitable, and it may be of any color. Cuttings can usually be had from furniture stores; and if these are not available, a square yard may be purchased for one's first attempt.

**A**NY sharp knife with a solid handle will do, though a stencil-cutting knife is about the best. You can get along very well with an ordinary kitchen vegetable knife.

If you have a set of wood-carving tools at your disposal, you will find almost all of them useful, especially a U-gouge about  $\frac{1}{8}$  in. wide and a small V-gouge. Flat chisels of two or three sizes are also convenient.

All cutting tools should be kept as sharp as possible, for the linoleum is soft stuff and will sometimes push ahead of the tool rather than stand up to it. The result may be a sudden slip and a badly scarred piece of work.

Bits of sawdust in the body of the linoleum are occasionally troublesome; one must be on the watch for them, as their sudden and unexpected yielding is another cause of slipping.

A carpenter's bench is about the best to work on; failing that, a table which can stand a certain amount of rough usage.



Carved and painted panels of linoleum can be inserted in cabinet doors and applied in various ways to many different types of furniture.



Your design may be drawn directly on the linoleum, but you undoubtedly will prefer to work it out on paper first and then transfer it with carbon paper. This is almost essential if you want duplicate designs.

If the linoleum is light in color, the carbon lines will show up well, but a dark linoleum may require a different process. I have found that a good method is to cover the back of the paper with a coat of white wax crayon and then offset the white wax to the linoleum with a stylus.



After the design has been drawn on the linoleum, a knife cut is made about half way through the material, the cut being vertical.

Whichever way you do it, you will probably find it desirable to go over the transferred design with India ink to prevent obliteration of the lines while you are working.


In drawing your design, it is well to bear in mind that most work of this kind is improved by having a border round it, and care should be taken to allow for this from the beginning.

The work illustrated consists essentially of two contrasted surfaces, the original linoleum surface and a background about  $\frac{1}{8}$  in. below, which is reached by excavating certain areas. Other types of carving may be employed also, just as in the conventional wood carving.

If you intend to follow the type of designs shown in the illustrations, use a knife to cut the outline of the part you wish to work on first. The cut should not be deep enough to go more than half way through the material, and care should be taken to keep the knife vertical so that the excavated area may have straight walls. It is well to rest the forefinger of the left hand on the back of the knife blade near the tip to guide and steady it.

**T**HEN take a U-gouge, if you have one, and run parallel grooves all across the part which is to be cut away. The ridges left between the grooves may be cut down with a flat chisel, and the required depth will soon be reached. All the work may be done with the chisel if necessary.

Very often tool marks can be made to play a valuable part in

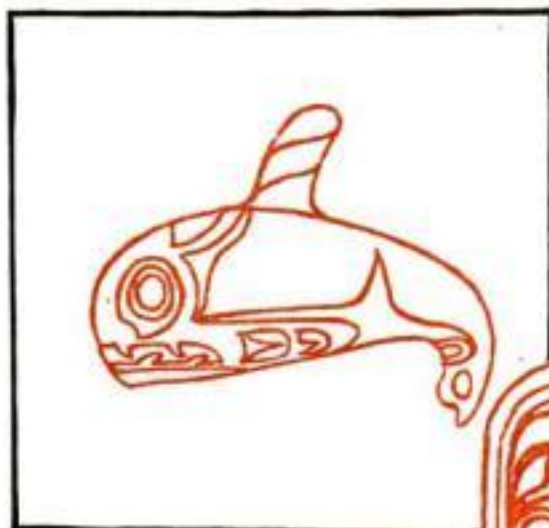

These design motifs were adapted from decorations made by Indians of the Northwest Coast, but almost any type of modern or historic ornament can be successfully employed.



The background spaces are cut down by scoring a number of lines across them with a gouge and then removing the ridges with a chisel.

Cupboard doors which were shown at a handicraft festival in Ottawa by Mr. Leechman. The door panels were made by the method described.



ary. The cupboard doors illustrated below also show the method.

In making use of this scheme, it is well, if it is to be used in your own home, to notice from what angle the light will strike the finished work when it is in place, and to plan your tooling accordingly.

Much, too, can be done with shallow grooves cut with a small V-gouge, and lines can be emphasized or merely indicated by varying the depth of the cut. Beware of cutting too deeply, and be especially careful when the end of your cut is close to the edge of the part you are working on. Sometimes a piece taken out by mistake can be glued back into place, but that is an expedient for emergencies only and is not recommended as standard practice.

When the actual carving is finished and all loose particles have been removed, the work is ready for painting. Oil colors in tubes are what I prefer, and I use turpentine as a medium rather than linseed oil, as it gives a smoother finish.

Do not try to paint as if you were working on a canvas; keep rather to




obtaining the finished effect. Short or long, deep or shallow, narrow or broad, parallel or irregular, each type of working gives a different surface. A judicious use of this idea adds much to the richness of the work and the possibilities of the craft.

Some notion of the general effect may be gained from an examination of the background of the upper illustration on page 81, which is a cut made directly from a sample carving instead of from a photograph as is custom-

broad, flat poster effects, and avoid delicate shading and brushwork. Be careful that your color scheme is harmonious in itself, and also with the surroundings of the finished job, if you know what they will be.

Let the paint dry thoroughly, applying two coats, should that appear necessary. Then, if you wish, give it a coat or two of good clear varnish.


In some cases you will find it desirable to strengthen the material by gluing it onto a sheet of plywood. This may be done with any good glue by coating both surfaces, letting them stand for a few minutes, and then applying them firmly and accurately to each other. Let them remain overnight under a heavy weight.

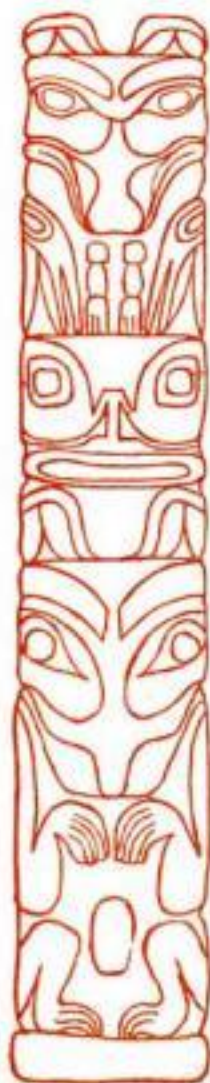

Additional suggestions for Indian designs. Mr. Leechman, who prepared these drawings, is a member of the staff of the National Museum of Canada, Division of Anthropology.

**S**HIP model makers can clear their benches and sharpen their tools in preparation for the November issue of **POPULAR SCIENCE MONTHLY**, which will contain the first of a noteworthy new series of articles by Capt. E. Armitage McCann. In response to many requests from readers, he has been working for months on a model of the *Bluenose*, famous racing fishing schooner. This is the model he will now describe and illustrate.



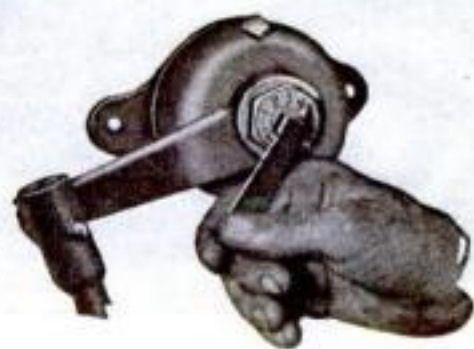

## Tune in on Comfort!

Set the single dial to the point of greatest comfort—and the “carburetor precision” of the Houdaille needle valve does the rest.

That's how easy it is to adjust Houdaille Shock Absorbers to the exact requirements of *your* car—for the weight *you* carry and for just the amount of spring control that pleases *you*.

Get Houdaille Shock Absorbers for your car NOW and you will see that they are provided on the next new car you buy. They are standard equipment on Lincoln, Pierce-Arrow, Jordan, Ford, Stearns-Knight, Nash Advanced Six, Chrysler Imperial, Studebaker President, Graham-Paige and many European cars.

HOUDAILLE ENGINEERING CORPORATION, BUFFALO, N. Y.  
(Division of Houdaille-Hershey Corporation)

# HOUDAILLE

Hydraulic  
Double-Acting

## SHOCK ABSORBERS

Some of the mechanical features which have made Houdaille hydraulic double acting shock absorbers *the world's standard of comparison* are . . .

1. The double or balanced piston which reduces wear to a minimum by balancing the working pressure on both sides of the shaft, thus eliminating one-sided thrust.
2. The large capacity reservoir which holds a reserve supply of fluid and makes it unnecessary to pack the instrument against high working pressures.
3. The patented air vents and replenishing valve which allow for the escape of air and gases and make the instrument *truly hydraulic*.
4. The easy adjustment for accurately adapting their resistance to your individual car.

### New Low Prices

Your car dealer can supply Houdailles at the new low prices . . . \$40, \$50, \$75 and \$100, plus installation. Slightly higher west of the Rockies and in Canada.



# Knocks That Tell of Motor Ills

Unusual Noises Are Symptoms of Trouble, Says Gus, But Don't Let Your Ears Spoil the Fun of Driving

By MARTIN BUNN

**T**HERE! Hear that? There it is again!" Bancroft exclaimed, as he singled the tip of his ear on the hot exhaust manifold in the attempt to listen more closely. "I tell you there's something wrong with that motor."

Gus Wilson listened intently for a few moments.

"Mr. Bancroft," said the veteran auto mechanic, "there's nothing wrong. What you hear is the clicking of the valve tappets. I can set 'em tighter if you want me to, but I'd advise against it. If the tappets are set too tight the valves may not seat when the motor is cold, and the valve seats and the faces of the valves get burned. I'll check 'em to make sure they are as tight as they ought to be."

After Bancroft was convinced that his motor was properly adjusted and had driven away, Gus turned to Joe Clark, his partner in the Model Garage. "It's all right for a man to be fussy about the condition of his car," he growled, "but that bird Bancroft makes me tired. He's always got his ear working overtime trying to hear knocks and things in the motor."


"They're not all that way," grinned Joe. "Fellow left a car here last night just after you'd gone. The windshield wiper was on the blink and he wanted it fixed. He spent ten minutes bragging about what a fine car it is. There it is over in the corner. Start the motor and see what you think of it."

Gus reached in and pushed the starter pedal with his hand and the engine started at once.

"Suffering cats!" he shouted, to make himself heard above the clattering and thumping of the motor. "I don't see that the owner of this car has anything to be proud of. Sounds terrible to me."

"IS THAT so!" snapped the sarcastic voice of the owner, who had arrived just in time to catch the end of Gus's remarks. "Trying to drum up trade, are you? Maybe the car is a bit noisy, but I wouldn't hesitate to start for the coast in that bus any day."

"You could start easy enough, Mr. Dobey," said Gus, noting the name of the owner on the repair ticket, "but it's kind of doubtful if you'd get there. Too many things in the motor in bad shape. Let's take it out on the road so I can hear what's wrong."

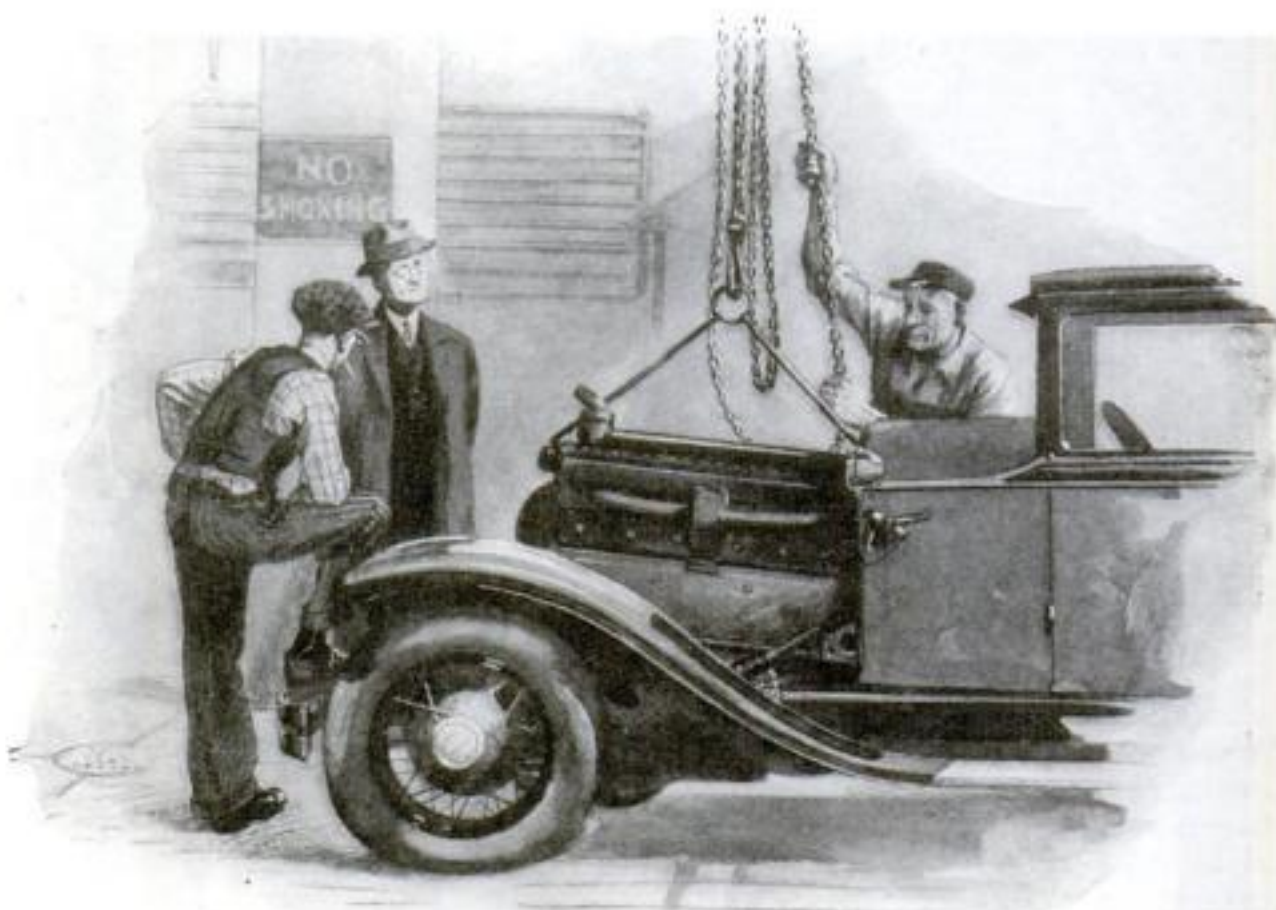

"If any of the things I say are loose turn out to be tight," announced Gus, as he began to hoist the noisy engine out of its frame with the portable crane, "I'll do the rest of the job at half price."

"Now," said Gus as they started down the road, "keep it running smoothly at about fifteen miles an hour till we get to the top of that hill."

"What's the sense of going so slow?" Mr. Dobey inquired.

"At fifteen miles the normal motor noises don't amount to much, and you stand some chance of hearing the queer ones."

They drove on for a short distance, and as they started up the grade Gus said: "It's kind of hard to dope the knocks when there are so many different ones, but that light knock is either loose piston rings, a loose piston, or both."

## Ask Gus—He Knows

**H**IGH compression cylinder heads are all right if you want maximum speed and economy, but there's no denying that they make a rougher-running motor. Also, if you get a tank full of poor gas, a high compression motor will knock like a boiler factory.

If you have a car with a high compression cylinder head fitted to the motor and you don't care about the extra economy and flashy performance to put up with the disadvantages, it's easy to reduce the compression without buying another cylinder head. Next time the carbon is removed, have the service man put in two cylinder head gaskets instead of one. If that doesn't do the trick, try putting in three gaskets.

Those muffled knocks indicate that at least two of the connecting rod bearings are loose, and that thump like somebody pounding on a block of wood with a mallet is the main bearing. The other jumpy thumping noise means the motor is loose in the frame. Of course the sharp, metallic knock means thick carbon deposits on the cylinder head and the top of the piston. The rest of the clatter comes from the valve mechanism. You might as well turn back now."

"What are you trying to do, kid me?" sneered Dobey. "The motor couldn't be as bad as that. How do I know you're not just trying to get away with a fat bill for overhauling?"

"Say, mister," Gus smiled, "I've been in this business long enough to know what I'm talking about. You stick around while I yank the motor out of the frame, and if any of the things I say are loose turn out to be tight, I'll do the rest of the job at half price."

"FAIR enough," Dobey admitted as they rolled into the Model Garage. He watched closely as Gus got the portable crane ready to hoist out the motor.

"Of course if only piston rings and a loose connecting rod needed to be replaced," said Gus, "there'd be no sense in going to all this trouble. We fix things like that by dropping the oil pan. But your main bearings are in bad shape, and I'd rather get the engine out where I can do the job right."

"Now before I start," Gus continued, "take a look at the bolts holding the motor in place. This one here is so loose you can turn it with your fingers. If you'd kept on running the motor in that condition, the pounding would have busted the motor support and then you'd





# This Investment in J-M Insulations PAYS 72% Dividend

*Expert Insulation advice may be as Profitable to you as to the world's largest makers of Sanitary Plumbing Porcelain*

WHEREVER heat does work, costs must be watched if profits are to be satisfactory. Careful conservation of heat by modern insulation practice will produce actual cash savings in any industry. Further, the world's largest manufacturer of sanitary plumbing porcelain has proved that these savings represent astonishingly large returns on the investment of heat-conserving materials.

Fords Porcelain Works, at Perth Amboy, N. J., operate kilns for firing porcelain fixtures of all varieties. The kilns reach a temperature of 2390 degrees Fahrenheit at the end of each firing. Insulating these kilns with Johns-Manville Sil-O-Cel has resulted in saving fuel oil representing a return of 72% each year on the cost of the insulation. In other words, this means that the cost of J-M Sil-O-Cel Insulation was paid for in 16½ months. Also, the working space on the floors above the kilns was made available for a work room through the reduction of uncomfortable temperatures which had existed before insulation was applied — another direct saving.

All kilns wherever used can be insulated to effect large annual savings. Nor is the effectiveness of Johns-Manville insulating materials confined to the insulation of kilns. For every industrial

process which makes use of heat, there is a suitable Johns-Manville Insulation.

## Cold Insulation Too

Johns-Manville insulation service is complete. Not only does it include insulation for the highest industrial temperatures, but J-M cold insulations provide for the preservation of temperatures down to 400° below zero by reducing the absorption of heat.

Let a Johns-Manville Insulation Engineer help you to save money by saving lost heat energy. A J-M expert will be glad to call without obligation. Write us a note or use the convenient coupon. In many cases we can show you savings even greater than those attained at Fords Porcelain Works.

## Widespread Service to Industry

Products bearing the famous J-M trade-mark are of everyday service to industry in conserving and controlling power, in safeguarding lives and property. Johns-Manville insulations include heat and cold insulations for every industrial purpose, besides Asbestocel for home heater pipes. Packings, Industrial Floorings, Asbestos and Asphalt Shingles, Acoustical materials, Asbestos Ebony and Brake Linings are other products on which J-M is the hall-mark of quality.



## Summary of Net Annual Savings Due to J-M Insulation at Fords Porcelain Works

Total annual fuel oil savings per kiln .	\$363.00
Annual charges for the insulation . .	64.89
Net annual savings per kiln . . . . .	298.11
Investment in the insulation . . . . .	412.70
Net annual return on the investment	— 72%
Investment is entirely paid for in about	16½ months
Net annual savings on 6 kilns (Insulated on arches and bases with Sil-O-Cel Brick) . . . . .	\$1,788.66

# Johns-Manville

## INDUSTRIAL INSULATIONS

For all temperatures from 400° F. below zero to the highest industrial temperatures

JOHNS-MANVILLE CORPORATION  
New York Chicago Cleveland San Francisco Toronto  
(Branches in all large cities)

Please send me a copy of the complete Performance Report of J-M Heat Insulations as used by Fords Porcelain Works.

Name .....

Address .....

1-96-10



have been up against a man's size repair bill."

"No doubt about the looseness there," Dobey admitted glumly after he had turned one of the bolts with his fingers. "I thought this talk about telling what's wrong with a motor by the sound was bunk, but I guess there's something to it after all."

"Like most things," Gus smiled, "there's some truth mixed with the bunk. Any smart Aleck who tells you he can spot any trouble in a motor right away just by listening to it is shooting hot air. But a smart mechanic should be able to locate anything that's really loose, by the sound."

"Then there's ways of running down particular troubles. For instance, if you hear a knock that you think is a loose connecting rod bearing, and you can hear it with the motor idling, short-circuit the spark plugs one at a time. When you cut out the explosions in the cylinder with the loose connecting rod, the noise will stop or get weaker. If shorting the plugs doesn't affect the noise, you can be

sure something besides loose connecting rods is setting up most of the clatter."

"Loose connecting rod and main bearings cause most of the noise in motors, I suppose," suggested Dobey.

"Some people have that idea," Gus replied, "and the minute they hear a clank in the motor they suspect the bearings. Most times the noise comes from the valve-operating mechanism. There may be too much play in the tappets, the push rod guides may be worn, or the cam shaft bearings may be loose. Of course, no one wants to ride in a car that rattles and clanks like an old junk wagon, but noises from the valve mechanism are not so important as loose connecting rod or main bearings. When bearings get so loose that you can hear them they ought to be fixed right away. If they're not, pounding may crystallize the shaft and break it, and that is serious. The valve mechanism can be loose enough to make a lot of clatter without causing any particular damage. Timing gears can rattle mighty loud without breaking."

"Gee!" exclaimed Dobey, "I don't

think I'll get any fun out of driving if I have to keep listening for noises all the time."

"Neither would I," Gus agreed. "What you want to do is to get your ears accustomed to the sound of the motor when it's running right. Don't keep *trying* to hear funny noises—just let your ears tell you of noises that really are loud enough so there's no doubt about you hearing them."

"You'll notice, too, that the motor always seems to sound quiet when you're in traffic, but after you've driven for an hour or two at a steady pace on a trip your ears begin to pick out and magnify little sounds that don't mean anything. Then, when you start out again the next day, you wonder where all the noises went to that you heard near the end of your trip the day before."

"I get you," nodded Dobey. "Your idea is to mix a little common sense with the listening."

"Common sense is handy—even in a car," grunted Gus. "But we'd go out of business if it got too common!"

## Mystifying with a Magical Ink Bottle

By GEORGE S. GREENE

**Y**OU have probably noticed the sensation caused at social gatherings by someone, perhaps disguised as a gypsy, who was able to "tell fortunes." Here is a trick which will go the professed amateur palmist one better and with which you can excite double the amount of curiosity. It can be guaranteed as a sure cure for "pepless" parties.

The performer sits facing the spectator across a parlor table in a side room. On the table is an ink bottle. The spectator is requested to write a question secretly and to fold it and place it in the ink bottle. After several moments the performer, in a mysterious manner, answers the question and gives the information desired.

The secret lies in the preparation of the innocent-appearing ink bottle. It has a hole drilled in the center of the bottom, and fitting loosely in the hole is a brass tube that extends up to the bottle mouth. The question goes into the brass tube. Then, as the performer moves the bottle about the table as if "making a spell," he allows the tube to drop into his lap. This he does easily by pulling the bottle slightly over the edge of the table in front of him as shown above.

He "concentrates" with one hand over his eyes, meanwhile looking downward under this cover and reading the question



Answering questions with the prepared ink bottle. The bottle can be corked after the slip of paper is placed in it "to alleviate any possible suspicion of trickery."



How the question drops past the table edge into the performer's hand, and two steps in preparing the hole in the bottle through which the tube slides.

which his other hand has removed from the tube and opened.

At the conclusion, or even before the question is answered, the question slip may be restored to the tube and the latter returned to the bottle, to be fished out afterwards and handed to the amazed spectator.

**T**HE illustrations show how to "trick" the bottle. The hole is drilled with the sharpened point of a file. When you have succeeded in making a small hole, enlarge it with larger round files. Do not hurry; for best results the glass must be filed away slowly in a fine powder.

Paint the inside of the bottle black. When the paint is dry, fill all but the space for the tube with plaster. This is done by inserting a waxed paper tube through the bottom hole and pouring the plaster around it at the wider mouth of the bottle, as shown in the illustration immediately at the left. When the plaster is hard, there is a smooth socket or guide for the brass tube.

The tricked bottle, if presented with reasonable care, is never detected. With sufficient adroit mystification and "patter" from the performer, the effect on the spectator is astonishing.

In his next article, Mr. Greene will describe several effective pocket tricks which can be shown anywhere.





# SAILING SHIPS AND GOOD RED PAINT

+

**I**N the seagoing days of *Moby Dick*, no ship was completely rigged without its carved figurehead at the prow, bedecked in as gaudy a coat of "good red paint" as the ship's store could supply. It was good carving, too. But the paint seemed most important.

Today, connoisseurs pay hundreds of dollars for small figures carved in wood by the hands of a master. To paint them would be prime sacrilege. For the beauty of the wood is a real part of the art, a part rough seafaring men overlooked.

Likewise, in all kinds of cabinet craft, amateur as well as professional, the craftsman's object is to bring out the inherent charm of grain and texture rather than to cover it up as a non-essential under a coat of paint. To this end Johnson's Wood Dye has contributed much. For it enriches even the most plebian of woods, its clear, true color sinking deeply, becoming a part of the wood itself, with not a lap or streak showing. Drying rapidly, it leaves no muddy scum such as cheap, pigmented stains leave.

For the newest and most expert methods of wood finishing write for our professional manual. It's FREE! Just mail the coupon.

**S. C. JOHNSON & SON, RACINE, WISCONSIN**  
*"The Interior Finishing Authorities"*

+



# JOHNSON'S WOOD DYE

S. C. JOHNSON & SON, Dept. (PSM10) Racine, Wis.

**Gentlemen: Please send me your free color chart and wood finishing manual.**

Name.....

**Address** .....

City \_\_\_\_\_ State \_\_\_\_\_



# Ingenious Kinks for Motorists

## Protecting the Face When Under Car—An Emergency Flange Repair—Other Useful Ideas

Each month POPULAR SCIENCE MONTHLY awards a prize of \$10, in addition to regular space rates, for the best idea sent in for motorists. This month's prize goes to Merrill Devore, of Cowiche, Wash., for his suggestion of a face protector useful in automobile repair work, shown in Figure 1. Other contributions published on this page are paid for at the usual space rates.

**P**ROTECTION of the eyes and face from dirt and grease while working beneath an automobile is afforded by the ingenious homemade mask shown in Figure 1. Take a piece of celluloid, such as is used for the windows in the curtains of open cars, and with a couple of pieces of string tie it in semi-circular form about the face. It will afford complete protection for the eyes from bits of caked dirt that are sure to be loosened by hammer or screw driver.

### Emergency Flange Repair

**F**IGURE 2 shows an emergency method of repairing a broken carburetor flange which may prove serviceable on a trip. It will do the trick until a service

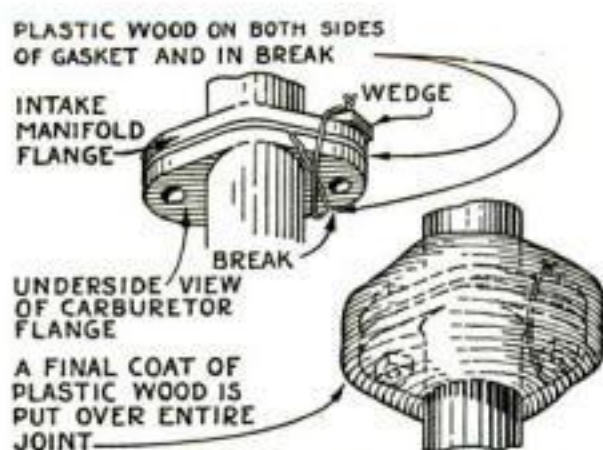


Fig. 2. An emergency repair of a broken carburetor flange, using composition wood to patch.

station or garage can be reached, and the broken flange replaced with a new one.

As shown in the illustration, the broken parts are temporarily wired together and a coating of a wood paste placed over the entire flange. After this has dried, two or three more coats of the wood paste are applied over the joint until it is in the form shown in the illustration. The repair will be surprisingly strong and also will be air-tight. Do not attempt to put a single, thick layer of the composition wood over the joint, as it will not dry as well as if applied in successive layers.

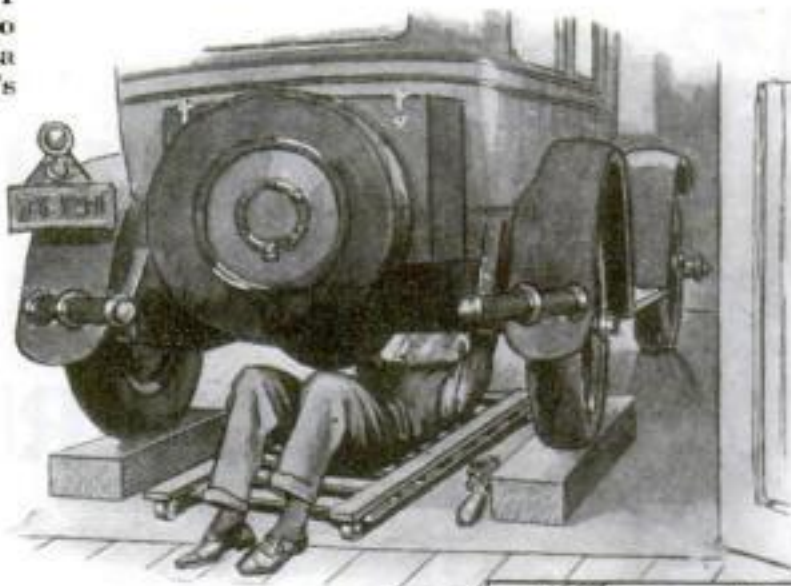


Fig. 1. How the face shield is made of a piece of celluloid.

### An Inner Tube Saves Shoes

**I**N MANY types of cars grease has a tendency to work out, to some extent, around the bottom of the gearshift lever. The shoes of a driver are likely to come in contact with this grease and be stained. To eliminate the trouble, cut a short section from an old inner tube and slip it over the gearshift lever to the bottom, as in Figure 3. This idea will prove valuable particularly in protecting light-colored shoes. If the piece fits too loosely, it can be held in place by a thin band of rubber cut from the same tube and doubled.

### Spark Plug Hole Cleaner

**A**FTER the cylinder head has been scraped free from carbon, it is desirable to remove the carbon from the lower threads in each spark plug hole. A simple way to do this is to grind or file

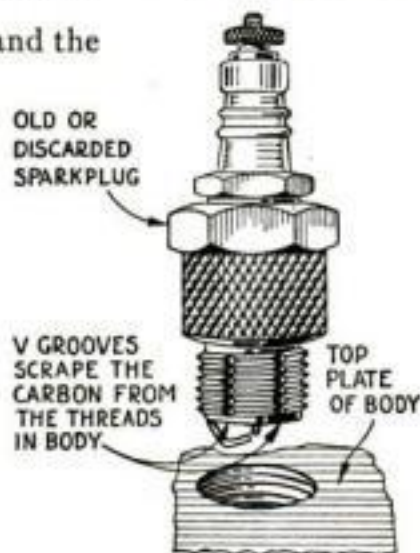


Fig. 4. Using an old spark plug to remove carbon from threads of spark plug hole.



Fig. 3. A piece of inner tube around gear shift base protects the shoes.

grooves across the threads of an old spark plug, as shown in Figure 4. Remove the gasket and screw the filed plug into the hole. It will seat slightly deeper than the standard plug and will remove carbon from the thread groove. A still better method, if a lathe is available, is to turn down the body of the spark plug,

just above the threaded portion, to a diameter slightly smaller than the bottom of the groove. Then slot the threaded portion with a hack saw, so that it can be screwed clear down to remove all the carbon from the bottom of the threads.

### Simple Garage Door Check

**F**IGURE 5 shows a novel and very simple door check that will prevent the door of a garage from blowing closed. A block of wood is screwed to the door and another flat piece of board is hinged to it by means of an ordinary strap hinge. A spring is hooked between two nails, one in the fixed portion and one in the movable portion. When the movable portion is turned up the spring holds it up; when turned down the spring tends to hold it against the ground.

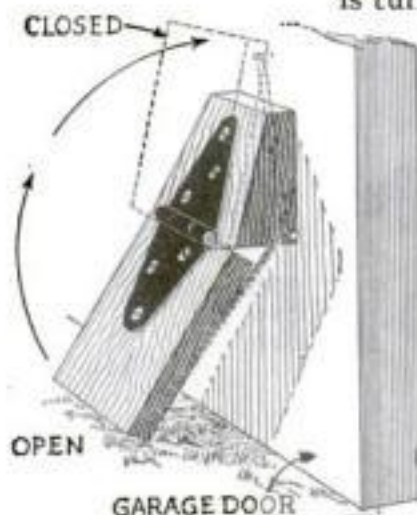


Fig. 5. A simple door check made with hinged blocks of wood and a small spring.

### Front Tire Wear

**F**RONT tires on cars fitted with four-wheel brakes may wear more rapidly than the rear tires if the front brakes are set too tight. This trouble can be eliminated by making sure that the front brakes do no more than their fair share of the work of stopping the car. In most cases, however, where the front tires show excessive wear, the trouble is caused by incorrect wheel alignment.



# NEWS

## for the owners of

### Buick

### Hupmobile

### Auburn 8

### Graham-Paige

### Nash

We have proved in thousands of miles of test driving on the Atlantic City Speedway, and in hundreds of laboratory tests, that the New Mobiloil "BB" gives the greatest summer protection and adds the most power to Buick (1929, 1928, 1927 models), Nash (Advanced and Special Six 1929, 1928, 1927 models), Hupmobile (All 1929 and 1928 models), Graham-Paige (All 1929 and 1928 models), Auburn 8's (1929, 1928, 1927 models). If you own one of these cars remember to ask for Mobiloil "BB". The price is 35¢ a quart (price slightly higher in Rocky Mountain and Pacific Coast States), and there is a

Mobiloil dealer always nearby.

Mobiloil "BB" is also recommended for other makes of cars. See chart at the right. If your car is not listed in it, consult any Mobiloil dealer.

No matter which make of car you drive, the way to be sure of correct lubrication for your automobile engine is to buy oil according to the Mobiloil Chart.

Regular draining and refilling with the New Mobiloil will keep the first-year feel in your engine for at least 30,000 miles.

**VACUUM OIL COMPANY**  
Makers of high-quality lubricants for all types of machinery

## FIND YOUR CAR

Here is a partial Mobiloil Chart covering most of the leading passenger cars made in the United States. Check up now. Find the correct grade of Mobiloil for your car. The recommendations below were made after practical and scientific tests of the New Mobiloil in your type of engine. Make this Mobiloil Chart your guide.


NAMES OF PASSENGER CARS	1929		1928		1927		1926	
	Engine		Engine		Engine		Engine	
	Summer	Winter	Summer	Winter	Summer	Winter	Summer	Winter
Auburn, 6-66.....	BB	Arc	BB	Arc	BB	Arc	A	A
" 8-cyl.....	A	Arc	A	Arc	A	Arc	A	A
" other models	BB	Arc	BB	Arc	BB	Arc	BB	Arc
Buick.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc
Cadillac.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc
Chandler Special Six	A	Arc	A	Arc	A	Arc	A	Arc
" other models	A	Arc	A	Arc	A	Arc	A	Arc
Chevrolet.....	A	Arc	A	Arc	A	Arc	A	Arc
Chrysler, 4-cyl.....	A	Arc	A	Arc	A	Arc	A	Arc
" Imperial 80	BB	Arc	BB	Arc	A	Arc	A	A
and Imperial	A	Arc	A	Arc	A	Arc	A	A
" other models	A	Arc	A	Arc	A	Arc	A	Arc
Dodge Brothers....	A	Arc	A	Arc	A	Arc	A	Arc
Durant.....	A	Arc	A	Arc	BB	Arc	A	Arc
Elcar, 8-cyl.....	BB	Arc	BB	Arc	BB	Arc	A	Arc
" other models	A	Arc	A	Arc	A	Arc	A	Arc
Erskine.....	A	Arc	A	Arc	A	Arc	A	Arc
Essex.....	A	Arc	A	Arc	A	Arc	A	Arc
Ford, Model A.....	A	Arc	A	Arc	E	Arc	E	Arc
" Model T.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc
Franklin.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc
Gardner, 8-cyl.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc
" other models	A	Arc	A	Arc	A	Arc	A	Arc
Hudson.....	BB	Arc	BB	Arc	A	Arc	A	Arc
Hupmobile.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc
La Salle.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc
Lincoln.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc
Marmon, 8-cyl.....	A	Arc	A	Arc	A	Arc	A	Arc
" other models	A	Arc	A	Arc	A	Arc	A	Arc
Moon.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc
Nash, Adv. & Sp. 6	A	Arc	A	Arc	A	Arc	A	Arc
" other models	A	Arc	A	Arc	A	Arc	A	Arc
Oakland.....	A	Arc	A	Arc	A	Arc	A	Arc
Oldsmobile.....	A	Arc	A	Arc	A	Arc	A	Arc
Packard.....	A	Arc	A	Arc	A	Arc	A	Arc
Peerless, 72, 90, 91..	BB	Arc	BB	Arc	BB	Arc	BB	Arc
" other models	A	Arc	A	Arc	A	Arc	A	Arc
Pontiac.....	A	Arc	A	Arc	A	Arc	A	Arc
Reo.....	A	Arc	A	Arc	A	Arc	A	Arc
Studebaker.....	A	Arc	A	Arc	A	Arc	A	Arc
Whippet.....	A	Arc	A	Arc	A	Arc	A	Arc
Willys-Knight, 4-cyl.	BB	Arc	BB	Arc	BB	Arc	BB	Arc
" 6-cyl.....	BB	Arc	BB	Arc	BB	Arc	BB	Arc

the New



# Mobiloil "BB"



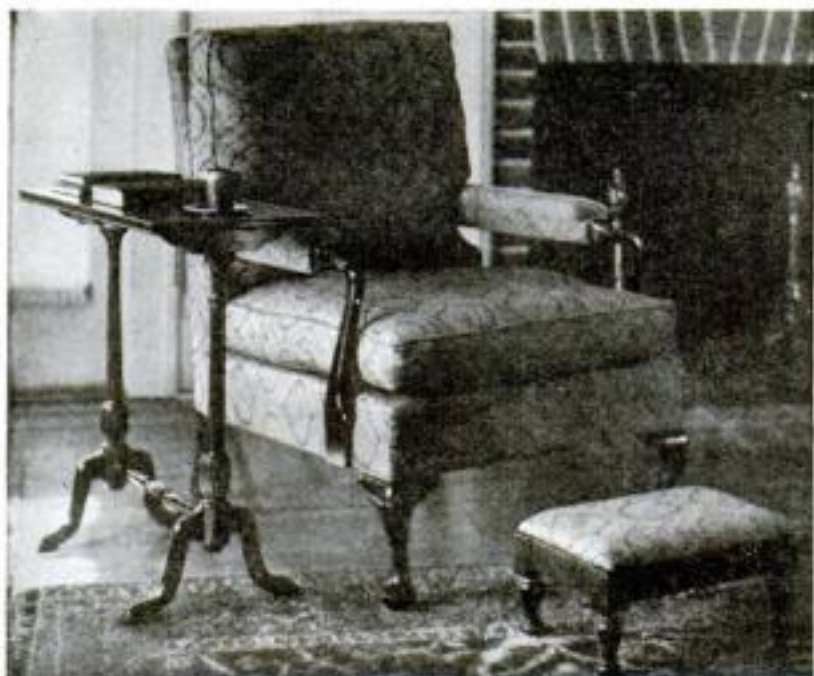

Graceful Maryland end table constructed by Mr. Klenke, who is a manual training teacher of national reputation and the author of *Art and Education in Wood-Turning*.

**I**N LEARNING to use small woodworking machinery or a motorized home workshop, you will find this Maryland end table a particularly instructive and desirable piece of furniture to build. Because of its delicate proportions and graceful lines, it is a little gem; at the same time it is simple in construction, and the materials are inexpensive.

Mexican mahogany is one of the best materials for this table, unless you intend to finish it with colored brushing lacquer, perhaps in some brilliant tone to make the piece individual and outstanding, in which case birch or maple is suitable. Because of the delicate proportions, a hard, strong wood must be used.

With this project, as in the two preceding articles of this series on making the most of small machines, we shall do the work almost entirely by machinery. Obviously, the same general methods can be used in constructing many kinds of tables and, indeed, in much furniture building. If you own any machines or intend to equip your home workshop with them, you will find that a mastery of the few simple principles involved will make possible the production of cabinet-work of professional quality.


**STEP No. 1—Getting Out Stock.** Using the planer and circular saw, get out all the stock in the following manner (the various pieces of wood used to make a piece of furniture are generally known as stock):

On the planer, dress one surface smooth and true; mark this with an X to indicate the working face. Hold this face against the fence of the planer and plane one edge at right angles to the working face. Mark this edge also with an X to identify it as the working edge.


Hold the working edge against the fence of the circular saw and rip the stock to the correct width, allowing  $\frac{1}{16}$  in. for planing. In like manner obtain the thickness. Return to the planer and dress all sawed surfaces smooth and true. Follow this method for preparing all the pieces. At this point it is advisable to cut out cardboard patterns of all curved parts.

# Operating Small Shop Machinery


By WILLIAM W. KLENKE

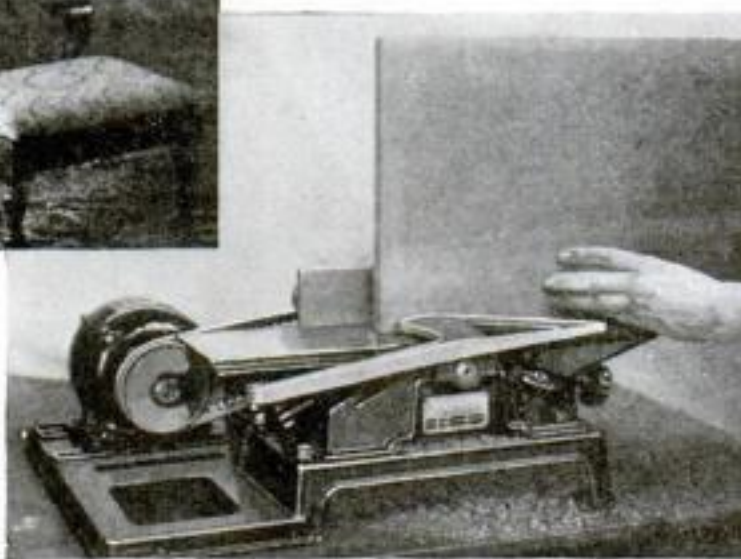

Planing the edges of the table top on a bench jointer. It is essential to hold the wood very firmly against the fence.

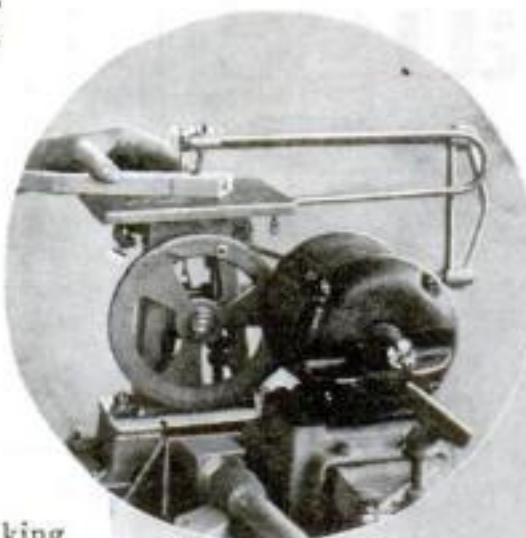

Sawing one of the top braces on the jig saw (at left) and turning a leg (below). Note the position of the hands holding the skew turning chisel.

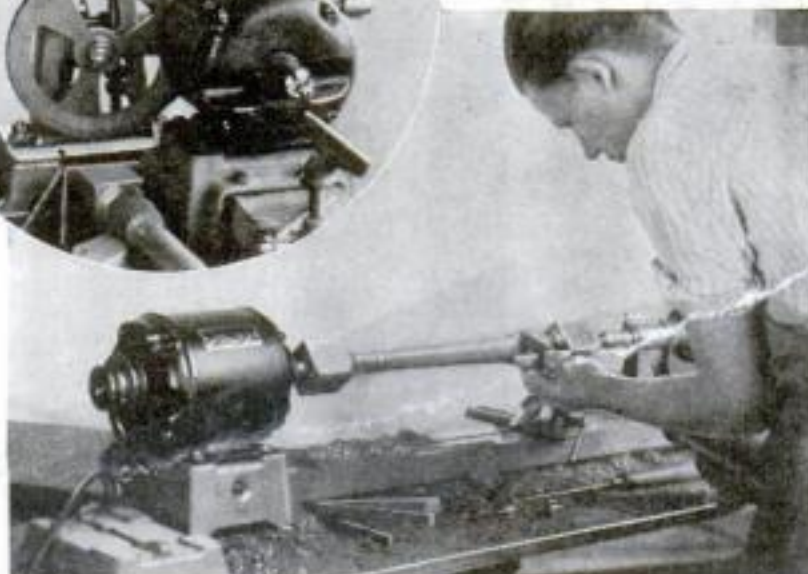

**Step No. 2—Turned Legs.** The stock for the legs should be at least  $\frac{1}{2}$  in. longer than the finished measurement, to allow for turning the bottom end without striking the point of the dead center.

Draw diagonal lines on both ends of the stock to locate the centers. Bore small holes at these points to receive the center pins. Square lines around the stock to locate the portions that are to remain square.

Rough the stock with a gouge and turn to the design. Sandpaper thoroughly while in the lathe. If you lack experience with a lathe it will be worth your while to look up


the series of articles recently published in *POPULAR SCIENCE MONTHLY* on wood turning, or to obtain a good book on turning.

**Step No. 3—Curved Feet.** Cut out the curved outline on the jig saw and smooth the edges on the drum sander. Use the disk sander for the flat bottom and top edges as in step No. 5.

**Step No. 4—Top Brace.** On the jig saw cut out the outlines of the braces; on the drum sander, true and smooth the outline.

**Step No. 5—Joints.** True the top and bottom flat edges of the curved feet on the disk sander. Carefully locate all the dowel holes. Place the chuck and dowel bit in the lathe and bore all the holes the correct depth.

**Step No. 6—Sandpapering.** Before assembling the

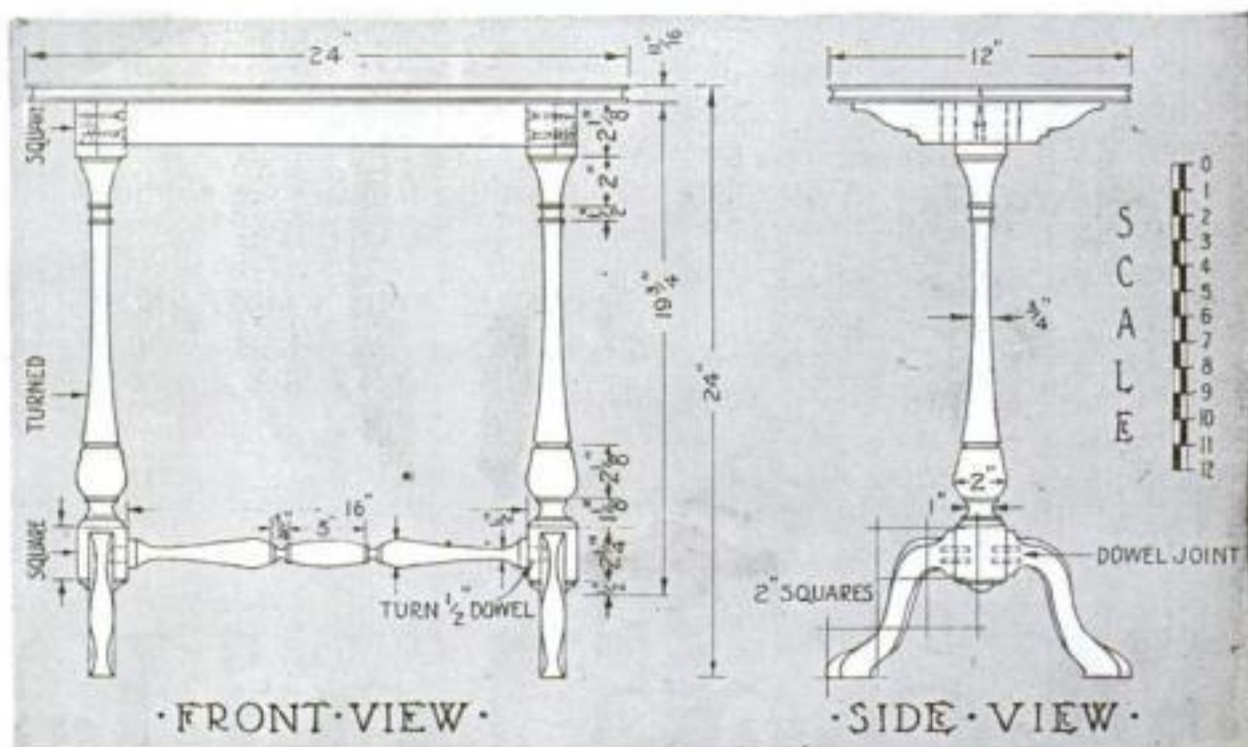

A table slightly simpler in design than the one shown in the upper photograph. The edges of the top can be left unornamented if no suitable molding plane or hand beading tool is available for the work.



## C &amp; L 32

*This is one of the most popular blow-torches we have ever made. It is more expensive than the 158 because it is made for much harder use. It is designed for the man who uses a blow-torch in his daily business and demands not only excellent performance but rugged ability to stand rough handling. 32 contains the most advanced patented C & L blow-torch improvements. It also has a red handle with the gold stripe. Sure sign of satisfaction.*

®

# ARE YOU PARTICULAR ABOUT YOUR TOOLS?



"You bet your life I am," you say. "When I buy a tool it's got to be right and it's got to stay right."

When you buy a Clayton & Lambert torch you're putting a worth-while tool on your work-bench. The most exacting blow-torch uses are considered in the manufacture of Clayton & Lamberts. Lasting materials—the strongest available, selected for long, efficient use. Many of the features of design are exclusive and patented Clayton & Lambert improvements—the result of 40 years' experiment and invention. And Clayton & Lambert torches are made by precision workmen. Men who think of tools and look at tools in the same light as you.

For instance—the vaporizing chamber has an exclusive vein system for quicker, hotter heat. That makes the torch function better and saves money



## C &amp; L 158

*This blow-torch is especially made and priced for the man who likes to do odd jobs around the house, or to tinker with mechanical things. It will last a lifetime if it is not abused. The usual retail price is about five dollars. Most hardware, electrical and automobile accessory stores have it—or can get it for you quickly. Look for the red handle with the gold stripe.*

on your fuel bills. All fittings are built into the tank by a patented method that prevents their falling in or coming out. There's *absolutely no danger* of an explosion with a Clayton & Lambert torch. Even the most delicate part—the gas orifice—is fool-proof. In the No. 158 the orifice has a guard. Slightly higher priced, No. 32 has a patented design so that you'll never ruin the torch by a careless twist of your wrist. And as you close the valve you automatically clean the orifice.

Things of that sort have made Clayton & Lamberts the largest selling torches in the world. There's satisfaction and pleasure in working with such a fine, capable tool.

You can buy Clayton & Lambert torches at hardware, electrical and automobile accessory stores. Look for the handle—it's red with a gold stripe. But to be sure—look for the trade-mark, too. It pays you to be certain that you're getting a Clayton & Lambert.

# CLAYTON & LAMBERT

MANUFACTURING COMPANY

Detroit, Mich.






The drum sander is used for smoothing concave surfaces. The work can be held above or below the drum as necessary.

**M**OTORIZED home workshops, once a rarity, are now becoming common. This is the reason why the hobby of making things is gaining so markedly in popularity. With the aid of small, reasonably priced, highly efficient motor-driven machines, even the beginner is able to accomplish wonders in woodwork. And he is released from the drudgery of sawing and planing by hand.

This article is the third of a series in which Mr. Klenke, through the courtesy of various manufacturers, demonstrates the use of many new home workshop woodworking machines of both combination and individual varieties.

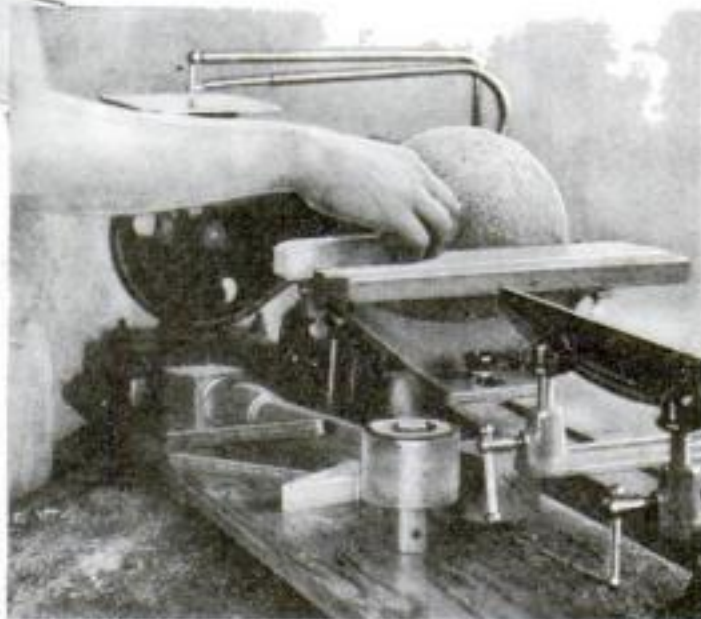

The flat edges of the feet at both top and bottom are speedily trued to an accurate fit on the sanding disk.

table, thoroughly sandpaper all parts with No. 1, followed by No.  $\frac{1}{2}$ , and 0 paper.

**Step No. 7—Assembly.** Make a trial fitting between clamps without glue. First, glue the curved feet to the legs; then assemble the entire project, using plenty of first-class liquid glue or hide glue of good quality. The tops of the legs are held together by gluing a strip on each side of the leg. Fasten the top to the braces with screws.

**Step No. 8—Cleaning Up.** Remove all excess glue with a sharp chisel, working across the grain where possible. Thoroughly sandpaper all parts with No.  $\frac{1}{2}$ , 0, and 00 paper, always rubbing with the grain where possible, and rounding the corners slightly.

**Step No. 9—Finishing.** If a lacquer finish is to be used, first apply two coats of white shellac, rubbing each coat when dry with 00 sandpaper. Apply the lacquer according to directions on the can.

If you have used mahogany or walnut or a wood which is to imitate them, brush on water stain or a prepared wood stain or dye of the desired color, and after it is thoroughly dry apply a very thin coat of shellac. Water stain has a tendency to raise the grain, and the shellac will stiffen these fibers and make them brittle. Sandpapering lightly with No. 00 or finer paper will cut them down clean and smooth.

Apply two coats of good quality paste wood filler (unless you have used some close-grained wood) according to directions on the can. Allow at least two full days—a longer time is even more desirable—for the filler to harden. Then brush on three coats of white shellac, rubbing each coat when dry with No. 00 or finer sandpaper and the last coat with rubbing oil, light machine oil, or crude oil and fine pumice stone powder.

With a spraying outfit, you can spray on clear lacquer instead of using shellac.

## Hints on Constructing Built-in Kitchen Cupboards

**I**N MODERN homes a kitchen cupboard extending from floor to ceiling often is built along one entire wall. If you live in a house without this convenience, you can construct a suitable cabinet yourself without much difficulty or great expense.

Measure exactly the space the cabinet is to occupy and make a drawing to aid you in both ordering the material and constructing the case.

The lower part of the cabinet with the table or work shelf should be of a height to suit the housewife and in no case too low. In a large and elaborate cupboard I built for my own home, I made the lower part 2 ft. deep but left a toe space at the bottom as shown. This space extends 4 in. under the cabinet and is  $2\frac{1}{2}$  in. high.

The upper part can be relatively shallow and entirely separated from the lower part. I screwed  $\frac{1}{2}$ -by-2-in. strips to the ceiling joists to serve for hanging the upper section and, of course, also fastened it to the wall.

The doors can be made with white pine frames and either plywood or pressed wood panels, the latter being thinner and cheaper, yet strong and durable.

A good way to make the table top is to cleat together 1-by-12-in. white pine lumber—I used what is called "boxing"—and then cement floor linoleum on top. To lay the linoleum cement easily, make



A homemade built-in cupboard with linoleum-covered working top. At the bottom is a recess to give toe space.

a trowel or paddle with a chisel edge from a thin board about 4 in. wide and notch the edge in saw-tooth fashion. Apply the cement and scrape the surface with the trowel, leaving only small ridges, not too close together. On this lay linoleum felt, heavy building felt, or even building paper.

Cut the linoleum to fit snugly and lay it on the felt, after applying the cement in the same way. Roll it down well and apply a small hardwood binding strip along the front edge of the top. At the back, along the wall and resting on top of the linoleum, a wooden strip 3 in. or more in width should be placed, to protect the plaster. Three coats of spar varnish will give the linoleum a durable surface.

How attractive the cupboard looks depends mainly upon the good taste and care with which it is painted. A study of modern commercial kitchen cabinets will suggest color schemes. The door panels can be decorated, if desired, with transfer (decalcomania) designs.

A bread board can be made of  $\frac{3}{4}$ -in. plywood. If the plywood is not of the so-called waterproof variety, put together with casein glue, it should be liberally oiled with linseed oil.—CARL G. ERICH.

Good sandpaper is often thrown away before its usefulness is over. Dust and gum, which fill in between the grits, can be removed by snapping the paper forcefully against the work or the top of the bench. Turning the paper around on the block also prolongs its life, because new edges of the gritty abrasive are presented to the work in each position. Ordinarily, for flat work, the paper is held around a block of wood, leather, cork, or rubber.




# How to Choose and Use Files

*Told by the World-Famous Makers of Disston Files*

**I**N the Disston Saw Works, more than 35,000 dozen files are used every year. They are Disston Files, made of Disston Steel, cut and hardened with Disston skill. This daily use of Disston Files, by Disston saw-makers, guards the quality of *all* Disston Files. For Disston Steel puts longer life—and faster, easier cutting—into files as well as saws. It is the world's

great cutting steel, with toughness and temper unequalled. You will find a Disston File still cutting true, long after another file would be useless. Far longer service, mechanics say, and better service *always*. There is no substitute for genuine Disston Files. Ask for Disston! Hand Saws, of course; but also Disston Files—every style, for every purpose.

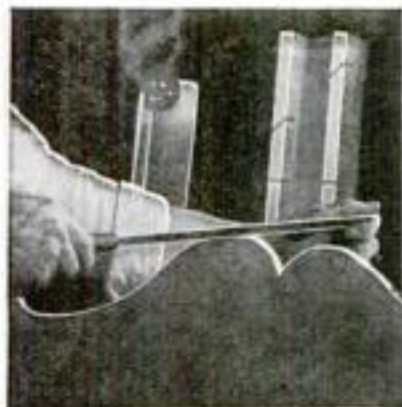

**Files for the Wood Worker**

Disston Cabinet Files (fine teeth) for smoothing and finishing wood surfaces, easing tight doors and drawers, etc. Disston Wood Rasps (coarse teeth) for rough and fast cutting, enlarging holes, etc. Half-round 8" Cabinet File, 65c. Flat 8" Wood Rasp, 50c.



*Making a Weathervane*

**H**OLD file firmly against metal to be cut. Allowing file to slip dulls it quickly. Proper position is with left hand at point, thumb on top of file, with right hand holding handle. For fast cutting, rest ball of left hand on file. Cut on forward stroke, use full-length of file and cut with a straight, regular motion.

In draw-filing, or making a finish cut for flatness, take position shown at right. Always keep file free from chips and filings, by using a file card and brush. Oil file before putting it away. Don't dull teeth by careless handling.

Single-cut files have one course of teeth diagonally across them, as in a taper saw file. Double-cut files have two courses of teeth, as illustrated below, with spacings of teeth differing as shown.



Bastard



Second-cut



Smooth

Bastard double-cut hand, flat and half-round files are widely used for fast cutting, with single-cut mill and taper files for a fine finish.

All good hardware merchants can supply Disston Files for every purpose, as well as Disston Saws and Tools.

## DISSTON

Makers of "THE SAW MOST CARPENTERS USE"



**"The Saw Most Carpenters Use"**

The two handiest saws for the home workshop are the 26-inch 8-point for cross-cutting, and the 26-inch 5½-point for ripping. You will need these on almost every job. The popular "D-8" Lightweights cost \$3.45. Many other styles and sizes to choose from.



**Band Saws for Better Work**

Disston "Thin Gauge" Narrow Band Saws are 2 to 3 gauges thinner. They run better on machines with wheels up to 26" diameter. Saw 9' 8" long, ½" wide, 25-gauge, brazed, \$2.03. Other sizes in proportion.



**For Cutting Dovetails, etc.**

Wherever the finest possible joint is needed, and for dovetailing, pattern making, etc., use a Disston No. 68 Dovetail Saw. Blade extra thin, with fine teeth. The 8" blade, 17 points to inch, is most popular. \$1.60.



**For Your Power Saw Outfit**

Disston Saws insure better work. Cut easier, stay sharp longer. Disston Circular Saws—cross-cut, rip or combination—are made to fit any make of machine. If your dealer cannot supply you, write to us for prices.



Every saw user will enjoy reading "The Disston Saw, Tool and File Book," an illustrated manual on the selection, care, and use of tools. It tells how to file and set saws, etc., and contains helpful information on the correct use of files. Use coupon, or write.



Henry Disston & Sons, Inc., Philadelphia, U. S. A.  
(In Canada, address Henry Disston & Sons, Ltd., Toronto, Ont.)  
Please send me "The Disston Saw, Tool and File Book."  
Name and Address.....



# How to Hold Angular Machine Shop Work

*Setting Up Small Parts—Plates for Obtaining Variations Up to Twenty Degrees—Emergency Jobs*

By HENRY SIMON



How a plain angle plate can be set at a slight angle by the use of a special adjustable plate.

**V**ERY small angles can be produced conveniently by a machinist or toolmaker with the aid of the adjustable blocks and plates of Figs. 1 and 2. In these devices, the angle is obtained by spreading the two "wings" by means of set screws, and holding the adjustment by corresponding lock screws.

As may be seen in Fig. 1 at C, the two wings should have a tendency to "pinch" when free, the set screw therefore being under pressure even when the lock screws are loose. The angle is determined in the usual way, either with the help of a micrometer, as at D, or by measuring the opening of the slot with a feeler gage.

The blocks of Fig. 1, which are small affairs made from machine steel, are mainly intended for "blocking" underneath the work. By enlarging one wing, however, they may also be made into small angular holders, as suggested at E, where a toolmaker's vise clamp is shown set in the block.

Larger than the adjustable blocks are the angle plates illustrated in Fig. 2. The front edge of the slot is milled to a depth of about  $\frac{1}{4}$  in. to allow measuring with a feeler gage.

It need hardly be said that a block or plate of this kind cannot be spread very much, and that it should not be used to obtain variations of over  $1^\circ$ ; yet within this range it is not only very handy for obtaining small angles but is equally useful for making corrections. Quite often some large angle varies "by a hair" from the true, and even more frequently it is necessary to compensate for some fixed error in the machine. When an angle plate is used, in particular, the error in the plate is frequently added to the machine error to produce a noticeable discrepancy.

Such cases can be readily handled by incorporating the adjustable feature in a right-angle plate, as at B. With such a plate it is easy to obtain high accuracy without having to resort to makeshifts such as shimming.

An example is that at D, where the error in a miller table is corrected in this manner. With lighter work, nearly the same result can be achieved by clamping

an ordinary angle plate to the plain adjustable-angle plate shown at A and truing up the whole in the machine, as at C, to eliminate the entire compound error.

T-slots, or tapped holes, or both, may be formed in the surfaces of these small-angle plates. The lock screws must not be too small and the set screws should be made with a round point and given a dish-shaped bearing on the opposite wing.

If the devices just illustrated are for obtaining very small angles, the adjustable-angle plate shown in Fig. 3 is intended for getting any angle from 0 to about  $20^\circ$  accurately and in a positive manner. It is designed for fairly large work or for mounting miller and drill vises. Though requiring some time to make, it will be found handy where work of this kind is regularly done.


The plate consists of a base *a*, to which a work-holding plate *b* is pivoted by a hinge pin *c* at one end. At the opposite end, the parts are held at the required angle by spreaders *d*. These spreaders are parallels of flat stock of different widths; they are a sliding fit in grooves in round seat bars *e*, which are a close turning fit in slots *f*. The two wings are locked together by four screws *g* working in revolving plugs *h*.

**I**N MAKING this plate, both surfaces of each wing should be machined before boring and reaming the hinge bearing. This operation completed, the corner *i* is backed off and about .010 in. ground from the top surface of the base. If the device is made with care, very accurate results can be obtained.

A useful addition for some purposes is that of graduated wedge type spreaders


and a matching seat bar, as at B and C. Each wedge is slanted at a  $6^\circ$  angle and has a run of one sixth of its length; each of the six graduations on the large end, as shown at C, therefore corresponds to  $10''$  of arc. With this accessory, a set of, say, ten spreaders can be made to handle the complete range of angles from 0 to  $10^\circ$ , and adjustment can be instantly made without calculation to within about  $5''$  of arc. As shown in the illustration, the seat bars in this case should be formed with headed ends to prevent lateral shifting and resultant inaccuracy of the angle.

Now for some emergency measures—for, in spite of all that can be done, there will always be many cases where such measures are called for. How a block of wood, though ordinarily considered unfit, may be made to do for an angle plate, is illustrated at A in Fig. 4. A good, sound block of close-grained hardwood should be chosen. The end grain must be against the faceplate, and there should be as much end grain surface as possible. Any good millwright can get the two principal surfaces within, say,  $\frac{1}{16}$  in., and this may

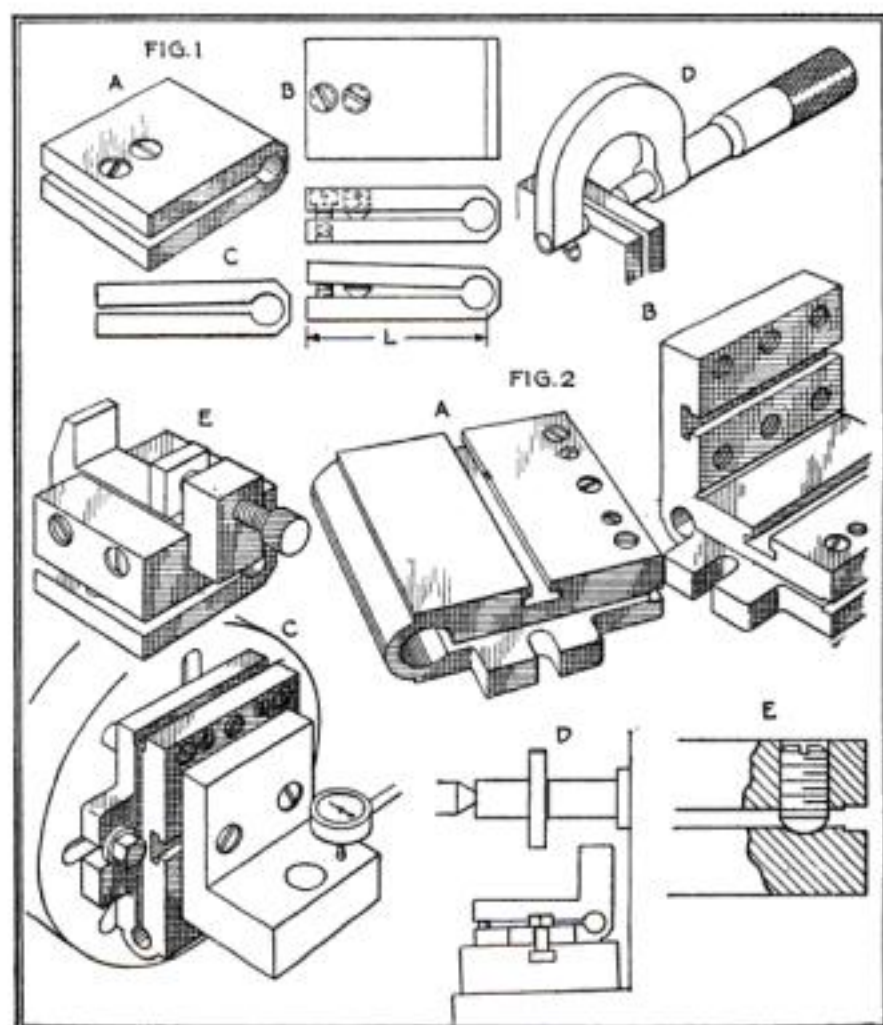

Adjustable block for use under small angular work (Fig. 1); adjustable plates of plain and angle types, and their use (Fig. 2).



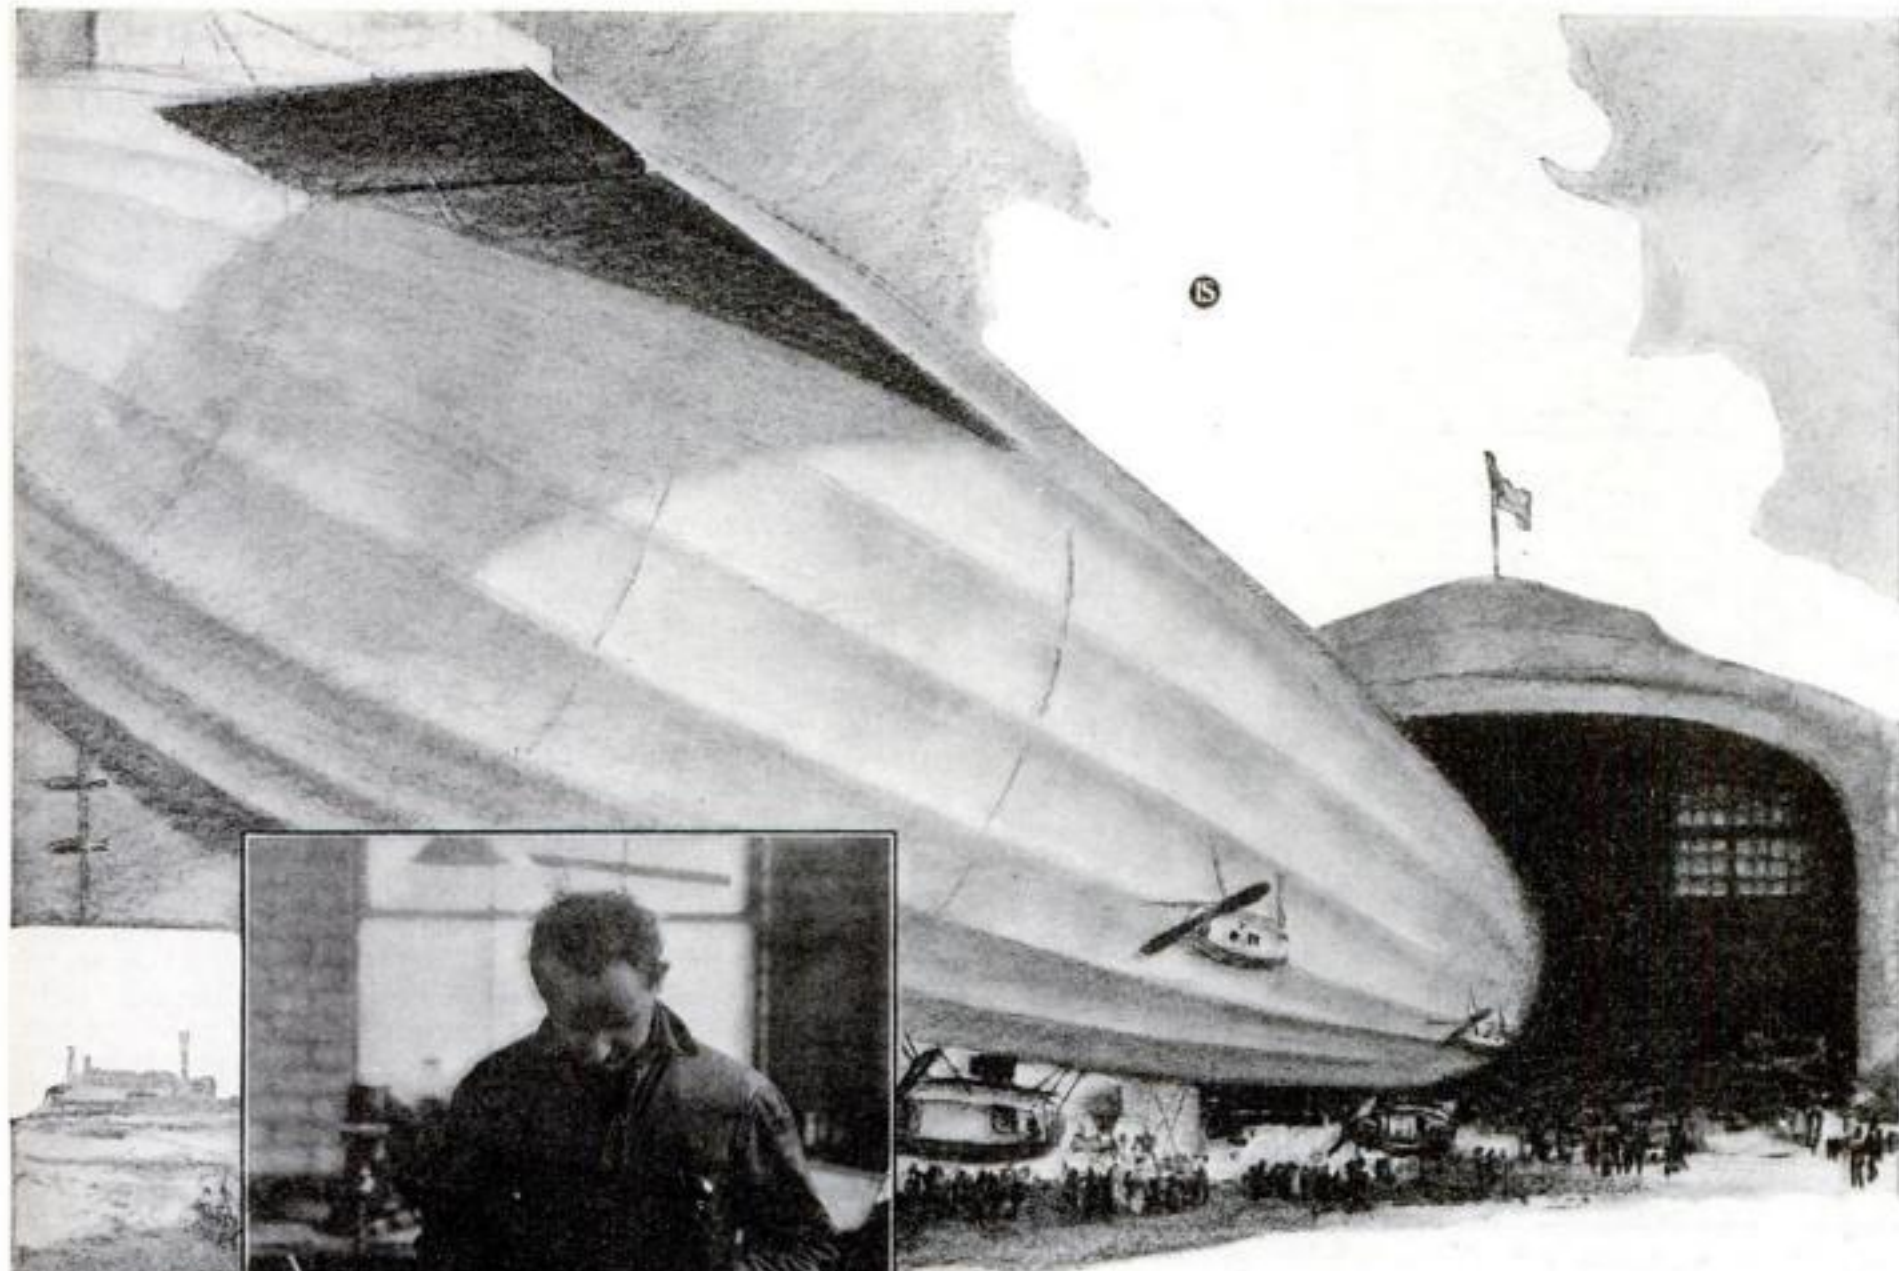


Starrett Tools are invariably selected where accuracy and dependability count most. They offer you equal satisfaction and service whether you use them for work or for fun.

Your dealer has the genuine. Ask him for Starretts.

*Send today for the  
free catalog No. 24 "W"*

**THE L. S. STARRETT CO.**  
*World's Greatest Toolmakers*  
*Manufacturers of Hacksaws Unexcelled*  
*Steel Tapes—Standard for Accuracy*  
ATHOL, MASS., U. S. A.

**Over 2500 Starrett Tools described and illustrated in the Starrett Catalog**

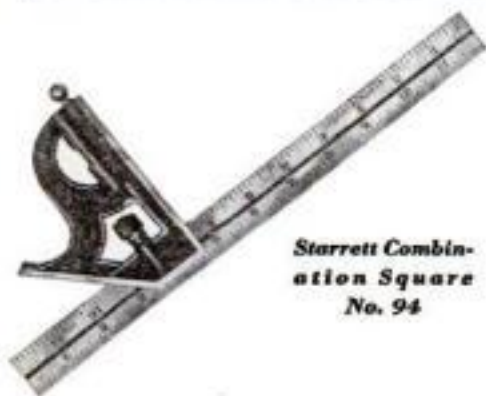


Starrett Combination Square  
No. 94



Starrett Micrometer  
No. 230



Starrett Thickness Gages  
No. 172




Starrett Pocket Slide Calipers  
No. 425

**Use Starrett Tools**





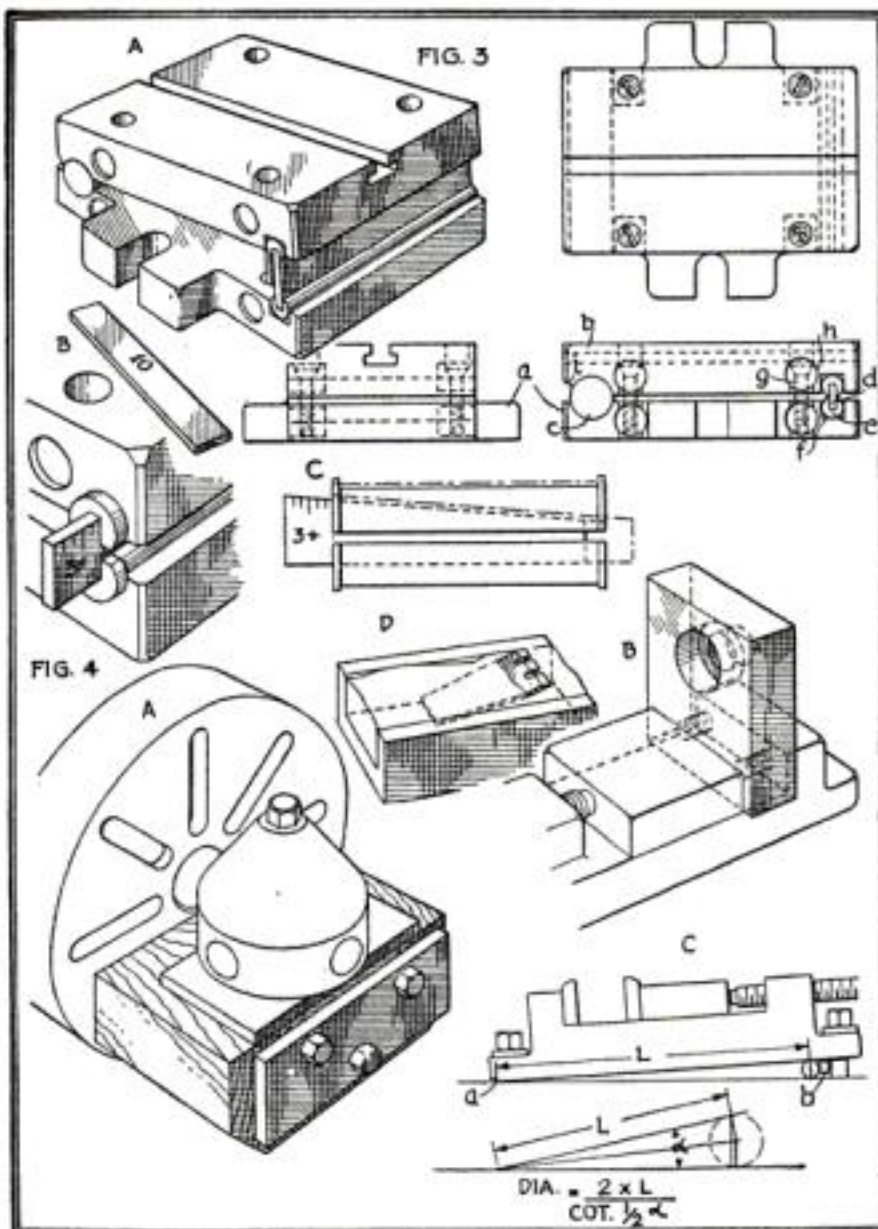

An adjustable-angle plate with range up to 20° (Fig. 3); various emergency measures (Fig. 4).

be reduced to within a few thousandths by shimming. By using good-sized steel plates under the bolt heads as well as under the work, crushing of the wood is prevented.

Where there is room enough, a good angle plate can be improvised by the combination of a flat vise and a heavy flat plate similar to B. As ordinarily used, with the plate held only by the jaw, results are frequently disappointing, because there is not a solid enough hold. By removing the parallel jaws and threading the screws from the head jaw into the plate, the combination can be made quite rigid; and, if the vise is true and in good shape, accurate results may be obtained.

A quick way of aligning a machine vise at a fixed angle by means of a piece of round stock is shown at C. A small offset at right angles to the side of the vise is formed by grinding or milling along the front edge *a*, and two small pins are set near the opposite end at *b*. The pins must be larger than the diameter of the largest rod it is intended to use, which should not be over about one-tenth the distance *L*. The diameter of the rod is found by means of the formula. The use of clamping nuts with semispherical undersurfaces is advisable.

Very occasionally, some light hard-to-hold odd job can be done in a hurry by the use of nothing more than—gypsum. A simple article of this kind, set in such a gypsum holder, is shown at D. The work is temporarily fastened in the correct position in any convenient ring or other suitable frame-like scrap piece with a wad of gum or putty; then the gypsum is poured around to just below where the cut is to come. The clear space for the gypsum should not be too large, or it will

shrink away in drying and be likely to crack loose from the work. It need hardly be said that only the lightest cuts can be taken when the work is held in such a way.

*Editor's Note:* Other problems relating to angular work were discussed by Mr. Simon in an article in the September issue. He will next take up the subject of hardening and tempering steel. The main topics previously treated were the handling and holding of work (December, 1928, January and February, 1929), avoiding distortion (March and April, 1929), measuring instruments (May and July, 1929), and optical aids (August, 1929).



## Old Bill Says—

**ALWAYS** use the arbor press to drive a piercing punch or bushing into its holder.

A cheap way to patch broken teeth in a cast-iron gear is to drive in pins; a good way is to dovetail the job.

Consult your neighbor on a difficult job; two heads are better than one.

When roughing cast iron on lathes, planers, and boring mills, use a round-pointed hog-nose tool with a coarse feed.

Your kit of tools and their quality denote your ability; better check up on them now.

Welding machinery steel to high-speed steel for use in long cutting tools effects a substantial saving.

Before starting to bore a tapered hole, make sure the tool is on the center.

Give immediate attention to a slight injury by visiting the first aid room; it is a healthy practice.

## Drill Extension Has Unusual Strength

**T**HE drill extension shown below combines an unusual number of desirable characteristics. Held as rigidly as if it were solid, the drill is yet instantly removable. The holder can be made to be only twenty-five percent larger than the drill diameter, and the combination of the two will still have the full strength of a solid drill.

The extension is based upon the same broad principle that has for many years proved a success with magazine drills, namely the interlocking end. The tool steel shank *A* is reduced at *B* to a size from .001 to .002 in. larger than the drill diameter, and has the front end at *C* slabbed off to half the diameter.

The rear end of the twist drill itself is halved in a similar way to interlock with the tongue thus formed on the shank, and the two parts are aligned and held together by a sleeve *D*, which is firmly seated on the reduced portion of the extension shank.

A small pin shown at *E* serves merely to keep the drill from pulling out, and is readily removed by way of knockout holes *F* through the sleeve. Sleeve *D* may be made a light force fit on the extension shank, or the end near where it abuts against the shoulder on the shank may be sweated on, care being taken not to get any solder into the open portion where it would interfere with the joint.

It should be noted that only the extreme end of the drill seats against the end face of the extension and that the internal corner at the base of the tongue is made with a radius to avoid hardening strains, the straight edge on the drill tongue being slightly beveled off to make room.

By this construction, neither sleeve *D* nor pin *E* is subjected to any torsional stress, which falls only on the dovetailed ends of the drill and extension. As pin *E*



Twist drill with a simply made extension which holds it rigidly yet can be quickly removed.

is exposed merely to the slight strain of backing out, it should not be made larger than shown. The stress on the sleeve is from the center, acting outward. It is, therefore, well to see to it that the piece from which the sleeve is made has no seam or "cold shut," as in that case it would be apt to burst. It is not necessary to make the sleeve from an alloy steel and to heat treat it, but, if this is done, its size may be reduced even more.

Preparing the drill is a simple matter. The extension itself forms a gage to show when the end is formed just right, and when it is, the drill is slipped in place and the pin hole drilled, using the hole in the tongue on the extension as a guide.

Most drills ordinarily in use in the shop will be found soft at the extreme butt end. Should one be somewhat hard, the trouble can be overcome as a rule by using a few drops of turpentine as a lubricant, or, if necessary, by drawing the temper of the tongue.





# Tools of Dependable Accuracy

IN their daily work, skilled mechanics are not always called upon to conform to limits of thousandths of an inch. However, even for their less exacting measurements, it is second nature for them to want tools of dependable accuracy.

Their experience with Brown & Sharpe Tools has led them to turn to these tools as the final authority for accurate measurements. This feeling of reliability extends from the tools used in the less exacting work to those used where the finest precision measurements are required.

Brown & Sharpe Stainless Steel Rules Nos. 350 and 356 maintain the usual Brown & Sharpe standard of accuracy. They are rustproof and will not stain or discolor. Full descriptions of these rules, as well as over 2300 other tools, are contained in our new Small Tool Catalog No. 31. Ask your hardware dealer for a copy or write direct to us for one. Dept. P. S., Brown & Sharpe Mfg. Co., Providence, R. I., U. S. A.

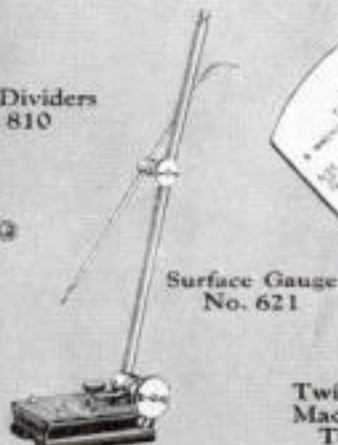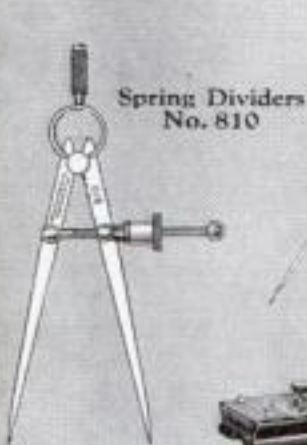

"WORLD'S STANDARD OF ACCURACY"

# BROWN & SHARPE TOOLS



# TO make BRAKE ADJUSTMENTS on BENDIX and other mechanical types also LOCKHEED HYDRAULIC

Get this Free Booklet  
(Use Coupon)



Shows the model of car, type of brakes and the wrench required in making each adjustment on the brakes of all popular cars.

## 8 ADJUSTMENTS COMMONLY MADE:—


### Mechanical Brakes

1. Lock Nut
2. Cam
3. Brake Rod
4. Anchor Pin
5. Bands

### Lockheed Hydraulic

6. Cam
7. Anchor Stud
8. Bands

**WILLIAMS**  
"SUPERRENCH"  
SET NO. 1950

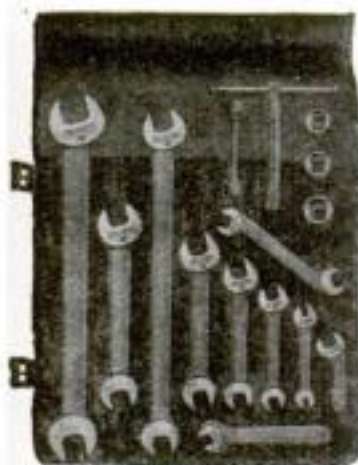

Designed for general brake work, including the new Bendix Two Shoe type. The service mechanic will appreciate these 10 Open End and 4 Socket "Superrenches." Forged from Chrome-Molybdenum steel, heat-treated. Chrome-plated finish, heads polished.



### GUS SAYS

"Everybody ought to have a good set of wrenches my set of Williams is worth three times the price"

### REMEMBER

Every "Superrench" is Guaranteed Against Breakage.

**J. H. WILLIAMS & CO.**

246 Vulcan St.

Buffalo, N. Y.

Please send me free booklet on Brake Adjustments.

Name .....

Address .....

City ..... State .....



Fig. 1. The old blades are softened by heating them to a dull red and cooling them in dry ashes.

## Tools from Old Hack Saws

By EDWARD THATCHER

MANY useful tools for the home workshop can be made from dull or broken hack saw blades. These blades are of fine tool steel and very hard; it is necessary only to heat them to a dull red and allow them to cool slowly, when the steel will be found soft enough to be filed and bent into various tools, which then may be hardened, tempered, and ground. For tweezers and saws, however, the steel remains just hard and springy enough after softening; in fact, no further hardening and tempering need be done except on cutting tools.

There are two kinds of hack saw blades

red but no more. Lay them on a brick to cool slowly, or, better still, thrust them under warm, dry wood or coal ashes and leave them for two or three hours.

When the blades are soft, put them in a vise and use a fine file to remove the teeth, or grind the teeth off before softening if you prefer.

The tweezers *D*, Fig. 2, are made from two 10-in. hack saw blades, with a rivet through the holes already in the ends. Place the riveted pieces in a vise, cut off the free ends just above the holes in them, and file the ends to long, tapering points. Make the bends with flat-nosed pliers.

Smooth up the edges with emery cloth and, if you wish, apply aluminum paint, which prevents rusting and makes the tweezers easy to find on the bench.

Tweezers *B* are made from a

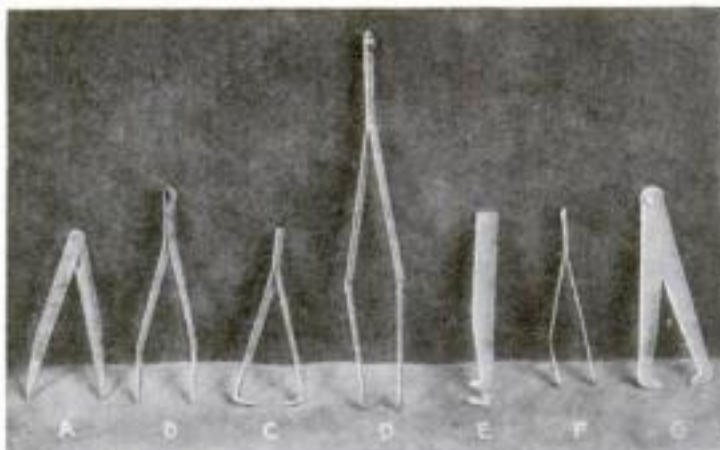


Fig. 2. Tweezers of various shapes, calipers, and scribe made from saws.

in common use, one with the blade hardened evenly throughout and the other with hard teeth but a soft back. The former make the best tools, but either kind may be used. Be sure there are no cracks in the blades you are to use.

To soften the blades (Fig. 1), heat them in the flame of a blowtorch or in a forge or stove to a dull red, so that they show



Fig. 3. Tools for ship model making and other delicate work: knives, saws, small grooving cutter, palette knife.



# Stanley Electric Tools

## 5 Important Points of Superiority of Stanley Electric Drills are:

**POWER**—Motors of the highest quality are used. Plenty of reserve power.

**LIGHT WEIGHT**—Specially designed aluminum alloy housing combines strength and rigidity with exceptionally light weight.

**COOL RUNNING**—A scientifically built ventilating system keeps the drill cool even under continuous operation.


**SMOOTH DESIGN**—No bumps and hollows to collect dirt and grease. Straight line construction permits their use in corners and other places having minimum clearance.

**CHUCK**—Furnished with three jaw type Chuck. Note convenient key holder in housing.

Backed by the reputation of the company that has been supplying you with the best tools for over 75 years.

Catalog S59 upon request.

THE STANLEY RULE & LEVEL PLANT  
New Britain, Conn.

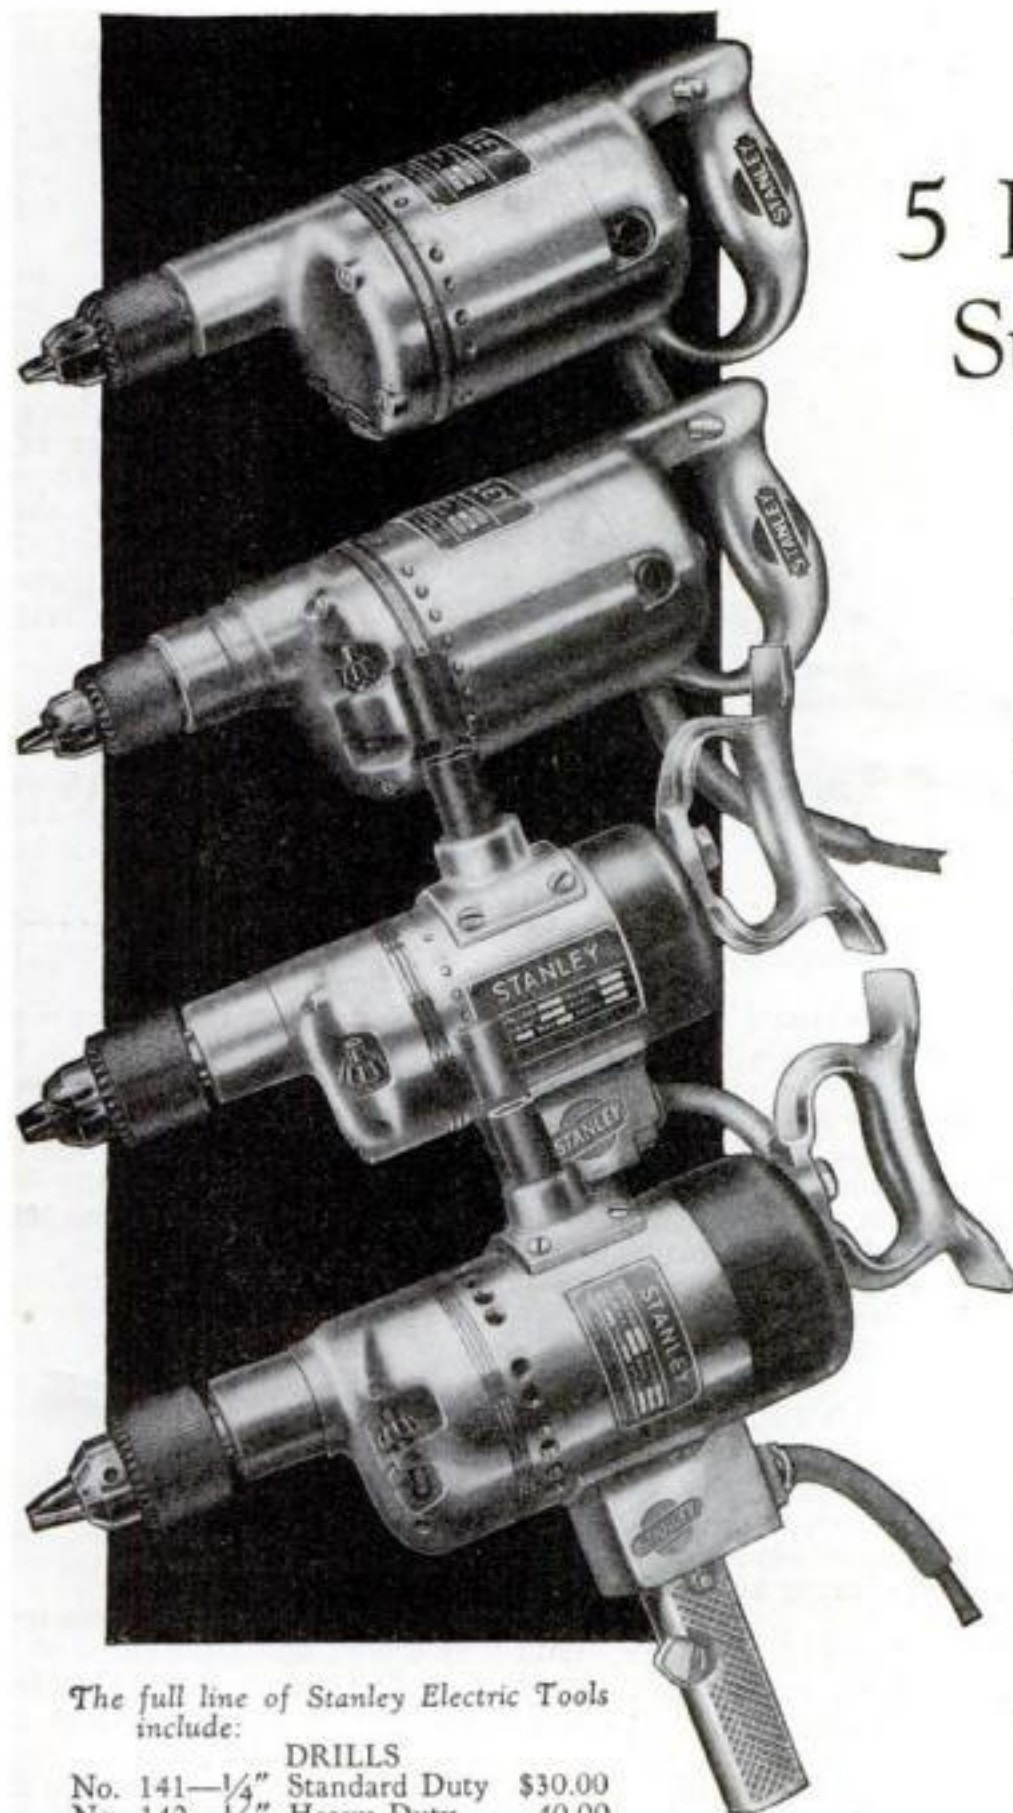

The full line of Stanley Electric Tools include:

DRILLS		
No. 141— $\frac{1}{4}$ "	Standard Duty	\$30.00
No. 142— $\frac{1}{4}$ "	Heavy Duty	40.00
No. 562— $\frac{5}{8}$ "	Heavy Duty	44.00
No. 382— $\frac{3}{8}$ "	Heavy Duty	52.00
No. 121— $\frac{1}{2}$ "	Standard Duty	54.00
No. 122— $\frac{1}{2}$ "	Heavy Duty	60.00
No. 582— $\frac{5}{8}$ "	Heavy Duty	68.00
No. 341— $\frac{3}{4}$ "	Standard Duty	70.00
No. 342— $\frac{3}{4}$ "	Heavy Duty	78.00
No. 781— $\frac{7}{8}$ "	Standard Duty	85.00

GRINDER—No. 556 Bench Grinder  
AC Current, \$46.00 DC, \$48.50  
Drill Stands, Attachments, etc.



®

# STANLEY TOOLS

*The Choice of Most Mechanics*





The nail-holding, nail placing Cheney NAILER is the handiest tool you've ever used. It is a valuable addition to your present collection of hammers.

#### Here's why:

1. Nail-holding device allows for one-hand nailing.
2. A safety factor for nailing in precarious positions.
3. Gives longer reach in placing nails.
4. Saves time.
5. Saves extra scaffolding.
6. Prevents injury to other hand.
7. Nail-holding device found only on well-known Cheney Hammer.
8. Nail-holding device an integral part of hammer—no attachments—no extra weight—doesn't affect "hang."
9. Every Bell Face and Plain Face Cheney Curved Claw Hammer in sizes of 16 oz. and over has the nail-holding device. No extra cost.
10. Not a single good Cheney Hammer point has been sacrificed for nail-holding device—materials, "hang," finish, all up to the Cheney high standard.
11. Securely holds nails of practically any size.
12. Nails quickly inserted, securely held and release themselves.
13. Built to withstand soundest blows. First blow often more than half drives nail.
14. Fully guaranteed.

Ask your dealer for this marvelous hammer. You'll wonder how you ever managed without one.



single 10-in. blade, which is softened and then heated again in the center so that the two ends may be bent.

Tweezers *E* are useful for picking up small objects. The blades are filed down, as shown, to the holes, and the rounded ends squared off.

Two short pieces of blade are riveted together to make tweezers *F*. The ends are left blunt and domed out from the inside with a center punch over a block of end-grain wood. These are for picking up ball bearings, silver balls in jewelry mak-

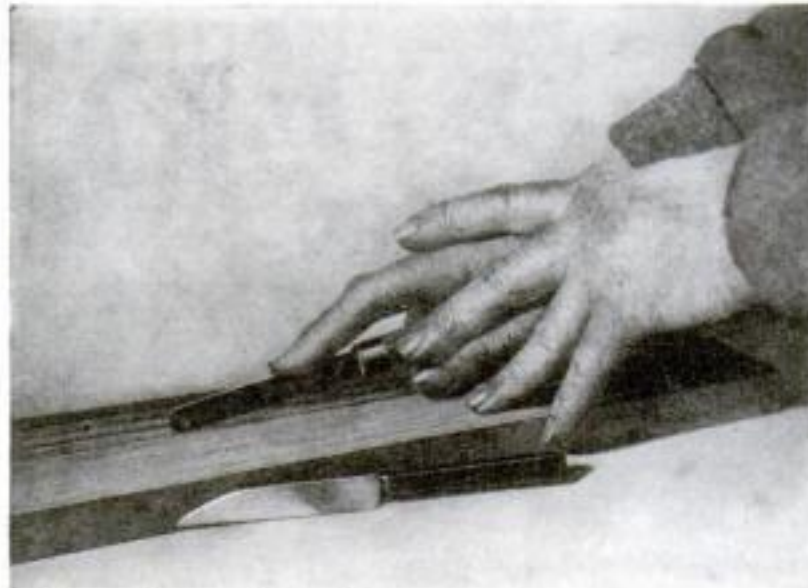


Fig. 4. Two special tools for cutting fine grooves to represent the planks or other divisions in ship models and similar work.

ing, or other small round objects. Tweezers *C*, with in-bent square ends, will be found useful in pulling.

Calipers *G* and dividers *A* are the remaining tools of Fig. 2. The blades of the dividers are given a trough shape by opening a vise to about three-quarters the width of the blade, laying the blade lengthwise over the opening, and hammering it with a cross-peen hammer or a piece of hardwood cut like a blunt cold chisel.

The cutting tools shown in Fig. 3, while not intended to replace regular wood-working tools, will be found advantageous in building ship models, wood carving, making linoleum patterns for block printing, and delicate work of many kinds.

THE knife blades *K* and *H* are made from unsoftened hack saw blades. Grind off the teeth and shape the ends; then, as a preliminary to tempering the steel, grind one side bright or polish it with emery cloth. Heat a flat iron bar red hot. Pick up a knife blade with tongs or pliers at the handle end or tang and rub the blade over the hot iron until the polished surface turns a very light brown for its entire length. At once plunge it vertically into water to cool. The blade then may be ground and sharpened.

Ordinary tool handles may be used for these tools. Drill a row of very small holes across the end of the handle, grip the tool or blade in an iron vise, and drive the handle on it.

When grinding thin tools be careful not to draw the temper. If you use an emery wheel, keep the work cool by dipping it frequently in water. An old-fashioned grindstone with water is really best for this kind of work.

The palette knife *N* is made in the same way except that it is ground thin toward

the point to make it springy. It is softened to a dull straw color as just described. The short saw *J* does not require tempering. Left soft, it is about the hardness of most saws for wood. The keyhole saw *O* is made similarly except that the back is ground or filed to a taper towards the point. These saws may be filed and set when they become dull.

For the back saw *L* the blade is left hard, if it is to be used for metal. It is a 6-in. length of blade with a back of sheet iron or soft steel about  $\frac{1}{2}$  in. thick.

A piece of steel strap used on packing cases will serve for the back. Scribe a line down the center of each side, place it in the vise, and bend the steel over at a slight angle along the center line. Move the strip along and bend the remainder. Then repeat the process, bending the whole length over at a right angle.

LAY it on a flat anvil and bend to a trough shape by hammering along the upper edge. Insert the blade and squeeze the back hard against it in the vise. The back, being left 2 in. longer than the blade, forms the tang.

At *M* is shown a tool for making slight grooves to represent the planking on the hulls of ship models. It may be made from either a hack saw blade or a ten-cent kitchen knife. In the first case, use the rounded end of the blade, grind the sides to the desired thickness, soften the blade

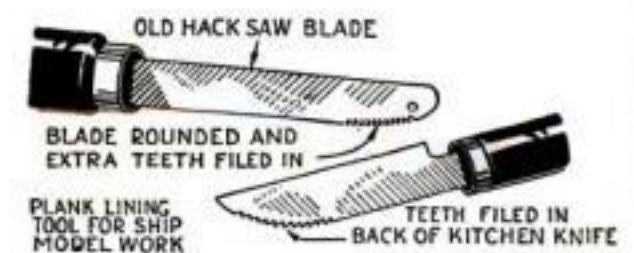


Fig. 5. Either an old hack saw blade or a common paring knife can be used for the tool.

by heating, then file in several more teeth until they extend up on the curve of the rounded end. Then use a fine flat file to dull the points of all the teeth at this end slightly (see Fig. 5).

To use the tool, planking lines are first drawn on the wood, then the tool is moved back and forth with a light pressure as in Fig. 4. For straight lines a ruler may be used to guide the tool.

The blade shown at *P*, Fig. 3, is used as a scraper.

In another article scheduled for early publication, Mr. Thatcher will tell how to make excellent little wood carving tools from old hack saw blades.

MECHANICS sometimes have trouble in trying to drill spring stock, especially if it is of good quality, even if they attempt to anneal it first. A simple expedient is to make a die by drilling a hole of the desired size in a piece of soft steel and to use a steel ball (from a bearing) as a punch. An arbor press or bench vise will push the ball through the stock and leave a perfect hole.—A. E. BODGE.



# Widen the Circle ...

Let the people  
in the *rear* seats  
**H E A R**



**E**QUIP a convention hall or large dining room with the Western Electric Public Address System, and you enable the entire gathering to hear the speakers with equal ease.

This product of the telephone amplifies sound and distributes it to all sections of a crowd, indoor or outdoor, and to any number of rooms desired.

More and more hotels are turning to the Public Address System as a means for making their meeting rooms more popular. It is more-over a medium of economy because it permits

a single orchestra to play at the same time in restaurant, grill, lobby, and everywhere else that loud speakers have been installed.

The apparatus which thus "widens the hearing circle" is made with all the skill and care which have so long characterized the manufacture of telephones and communications apparatus by Western Electric. It is clear toned, faithful in reproduction, dependable, modern. It has a wide variety of uses and is made in sizes to fit every need.



Healing by music—a service of the Public Address System in hospitals.



One of many interesting uses of Public Address in the schoolroom.


## Western Electric

PUBLIC ADDRESS SYSTEMS

DISTRIBUTED BY GRAYBAR ELECTRIC COMPANY; OFFICES IN 72 PRINCIPAL CITIES



## PORTER'S

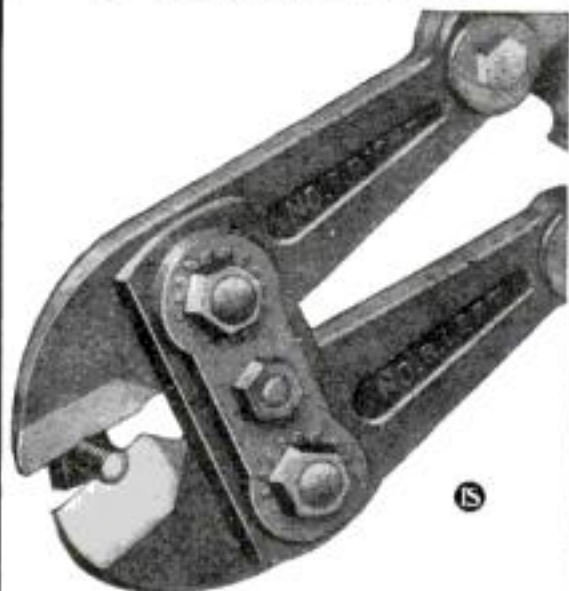

### BOLT CLIPPERS NUT SPLITTERS SHEAR CUTTERS CHAIN CUTTERS

**Tools that multiply man-power and make every precious minute count, cut labor costs and pay for themselves over and over again. Such are Porter Cutting Tools for nuts, bolts, rods, chains and wires. They are portable, with every advantage that term implies over stationary bench and power tools. And they are standard modern equipment in busy shops where "lost motion" has been found.**

Send for illustrated booklet describing Porter Tools, their uses and economies.

**H. K. Porter, Inc.**

7 Ashland St.

Everett, Mass.

Instead of cutting stranded wire rope with many strokes of a hacksaw, do it with the Porter Shear Cutter with a single easy snip. Capacity up to  $1\frac{1}{2}$  x  $\frac{3}{4}$  flat stock,  $\frac{3}{8}$ -inch wire rope.



Instead of struggling for half an hour to get a few rusted nuts off with a wrench, do it in a fraction of a minute with the Porter Nut Splitter. Capacity up to  $\frac{3}{4}$ -inch bolt.



Graceful old "parlor" oil lamps can be converted easily into valuable and decorative table lamps.

**I**N CONVERTING oil lamps into electric lights, the main problem is to find a satisfactory way to support the cluster and stem which elevates the bulbs and holds the new shade.

As explained in a preceding article, "Wiring a Vase for Lights," (July issue, page 112), you can buy a ready-made, completely wired assembly to be screwed into the opening of the lamp. Such an assembly is satisfactory if only one bulb is desired, as when the old glass shade is to be used. This article, however, will describe two methods that provide a support for a new shade of any type preferred.

Special tools needed are  $\frac{5}{16}$ - and  $\frac{3}{8}$ -in. twist drills, and a  $\frac{1}{8}$ -in. pipe tap and tap wrench, which perhaps can be borrowed. The materials required are a brass spun plate, a piece of  $\frac{1}{8}$ -in. running thread pipe from 12 to 15 in. long, a  $\frac{1}{8}$ -in. socket cap, a two-light cluster and stem, two standard pull-type sockets with  $\frac{1}{8}$ -in. threaded caps, a  $\frac{1}{8}$ -in. hard rubber bushing, a  $\frac{1}{8}$ -in. lock nut, an attachment plug, and the necessary silk parallel cord.

**A**FTER lifting out the oil tank, see if there is an opening in the center of the lamp extending from the bottom of the well down to the bottom of the base. This will be the case if a removable rod holds the sections together. Assuming that there is no such passage and that none can be made, the first method (Figs. 1 and 2) is the practical solution. All the work is done on the tank.

Fit the spun plate snugly over the top hole in place of the burner. Then cut the running thread pipe in a vise with a fine-tooth hack saw so as to allow

## Electrifying Old Kerosene Lamps


By HAROLD P. STRAND

a projection of  $\frac{1}{4}$  in. above the plate for fastening the stem and a sufficient projection below the tank for a socket cap to be screwed on. If the cap does not entirely fill the hole in the air shaft, use a large washer and a  $\frac{1}{8}$ -in. lock nut. Screw the assembly together firmly.

Drill a  $\frac{3}{8}$ -in. hole in the bottom of the tank and a  $\frac{5}{16}$ -in. hole directly over it in the top. With a  $\frac{1}{8}$ -in. pipe-thread tap, cut some threads in the upper hole and screw in the  $\frac{1}{8}$ -in. hard rubber bushing. Now pass the cord through and make the connections as shown in Fig. 2. Be sure to solder and tape the two joints carefully and press them down in the cluster body. Attach the sockets in the usual manner and connect an attachment plug at the end of the cord.

The second method (Figs. 3 to 5) is used when a  $\frac{1}{8}$ -in. pipe can be carried all the way down to the bottom of the lamp. Cut off the pipe, leaving enough at the top to project over the spun plate and enough at the bottom for a washer and nut, as shown in Fig. 4. Be careful to ream the burr from the inside of the pipe after cutting it off.

The cluster is screwed on, and the cord is passed up the pipe and connected as in the first method. The lower end of the cord is usually carried out through one of the open holes or ornamental filigree work in the base, but, if none exists, a  $\frac{5}{16}$ -in. hole is drilled where desired, tapped with a  $\frac{1}{8}$ -in. pipe tap, and fitted with a composition or rubber bushing.

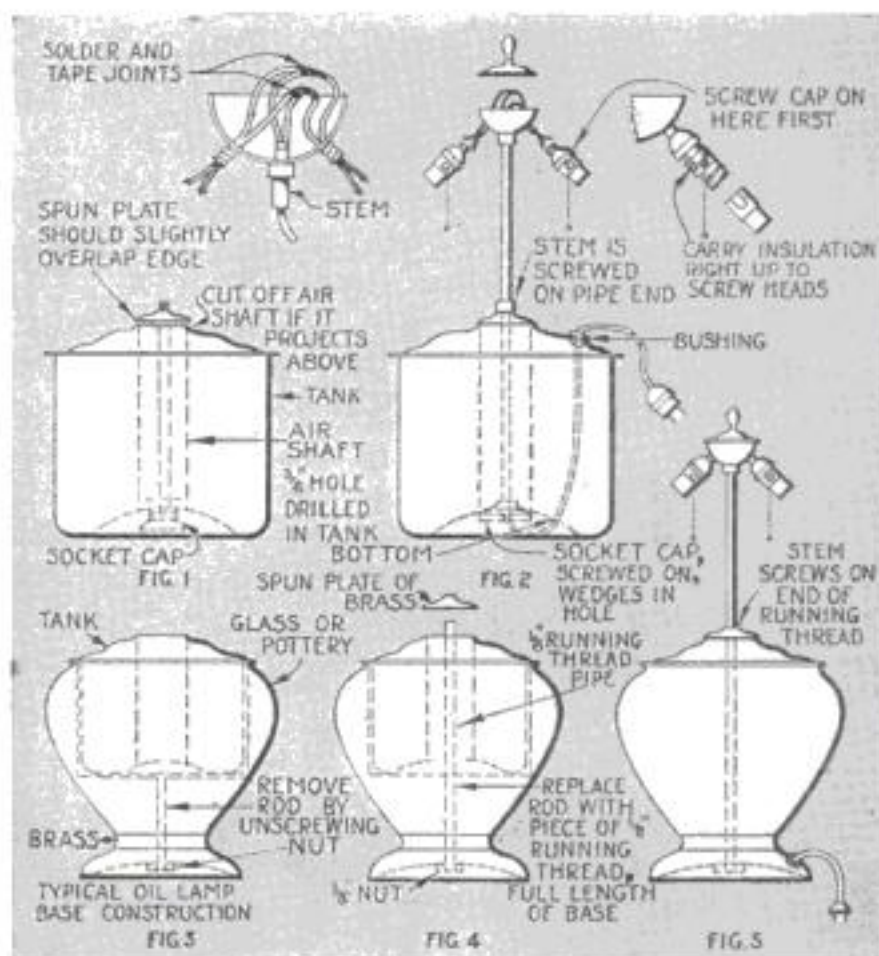

One standard type of oil lamp can be fitted with a cluster and stem as shown in Figs. 1 and 2, and the other chief variety as in Figs. 3 to 5.



# TRIAD INSURANCE.



Tube insurance—a radically new TRIAD idea! An actual printed certificate guaranteeing a minimum of six months' satisfactory service—or a proper adjustment made—with every TRIAD tube. Now—for the first time the tube purchaser can be absolutely sure of quality before he buys!

"Ask for the tube in the black and yellow triangular box."



Tune in on the TRIADORS every FRIDAY evening, from 8 to 8.30 P.M. (Eastern Daylight Time) over WJZ and associated NBC stations.

**RED CERTIFICATE**

This tube has been carefully tested at the factory before shipping and should give you with the instructions accompanying the tube. It is guaranteed to give you good service for a minimum period of six months from date hereof. If overloaded, an average life of one year or more may reasonably be expected. If satisfactory for any cause (except for breakage of glass), and it is returned to the Dealer from whom it was purchased, such dealer will replace it with a new one of equal or better quality.

TRIAD Manufacturing Co., Inc., of Pawtucket, Rhode Island, rated in *Dun's and Bradstreet's* as your assurance of living up to its promises.

*George Coby* President

DEALER'S NAME \_\_\_\_\_  
ADDRESS \_\_\_\_\_  
DATE \_\_\_\_\_

So many quality claims made—so few lived up to! With TRIAD you're sure of quality even before you buy. TRIAD quality is definitely *proved* by the very fact that an actual insurance certificate accompanies every TRIAD tube—guaranteeing a minimum of six months' perfect service or a satisfactory adjustment is made to the user. There's protection for you—protection that is *built* on quality. Protection that has won for TRIAD a tremendous nation-wide popularity! Speak to your dealer today—ask him for a demonstration of TRIAD tone quality—or make the demonstration with your own set at home. Once heard, TRIAD always has the preference. We ask that you try TRIAD—*once*—we know you will use *only* TRIAD afterward!

TRIAD MANUFACTURING CO., Inc.  
Triad Building Blackstone, Middle and Fountain Sts.,  
PAWTUCKET, R. I.





## The Toughest Critic In The World



Out in the oil fields a pipe wrench has got to be better than "good enough." Oil men demand the utmost in safety and strength.

That is why it means something that TRIMO is the favorite wrench of the oil man. He's the toughest critic in the world.

You can get the same safety and strength which the oil man demands by sticking to TRIMO—the all steel pipe wrench.

TRIMONT MFG. CO., Inc.  
Roxbury (Boston), Mass.

# TRIMO

Pipe Wrench

# Decorating with Kalsomine

By F. N. VANDERWALKER

THERE are many ways to handle kalsomine, simple and inexpensive finish as it is, so as to gain uncommonly decorative effects. It should be remembered, however, that most of these decorative wall finishes can be carried out in a more permanent form by using either prepared flat wall paints or white lead and flattening oil tinted to suit.

A mottled wall finish is illustrated in Fig. 1. Three colors of kalsomine were applied at one operation and all blended together. The wall was sized as usual with a weak solution of glue and water—about 1 lb. of glue to 1 gal. of water. When this had dried, pots of kalsomine colors were mixed up and a brush provided for each; they were ivory, a light, bluish gray, and a light, dull red.

A starting was made at the top of the wall and a stretch about 1 yd. square coated in, patches of each of the three colors being daubed on the wall. Then, while the colors were wet, they were quickly stippled with a wad of newspaper; that is, the newspaper was



GIVING a kalsomine painted wall a stippled effect by spattering with a brush.

by brushing one of them on as in any ordinary kalsomine job and stippling the other with a sponge. The second color is first brushed on a board and then picked up on the sponge.

A different pattern is shown in Fig. 2. This was made black on white to insure a clear photograph; it is, of course, infinitely more interesting when done in low contrasting colors or two shades of the same color.

The wall is first coated with a ground color kalsomine and allowed to dry. Then the second color is mixed as the first, and a brushful at a time is spread out on a board. A double sheet of newspaper is crumpled up into a roll and is pressed



Fig. 1. Mottled finish made with paper wad.

Fig. 2. A roll of newspaper was used for the effect as the right.

crumpled into a ball about the size of a large sponge and the wet colors were patted with it to blend them together. The newspaper wad was turned frequently in the hand to bring new creases and patterns into contact with the surface, and only enough stippling was done with it to make an attractive pattern.

Then another space 1 yd. square was done in the same way. This procedure was repeated until the wall was completed, the work being carried on from the top to the bottom of the wall and from left to right.

The ceiling in a room finished in this way may be a plain color—one of the colors used on the wall—or it may be in a two-tone effect produced from two of the wall colors

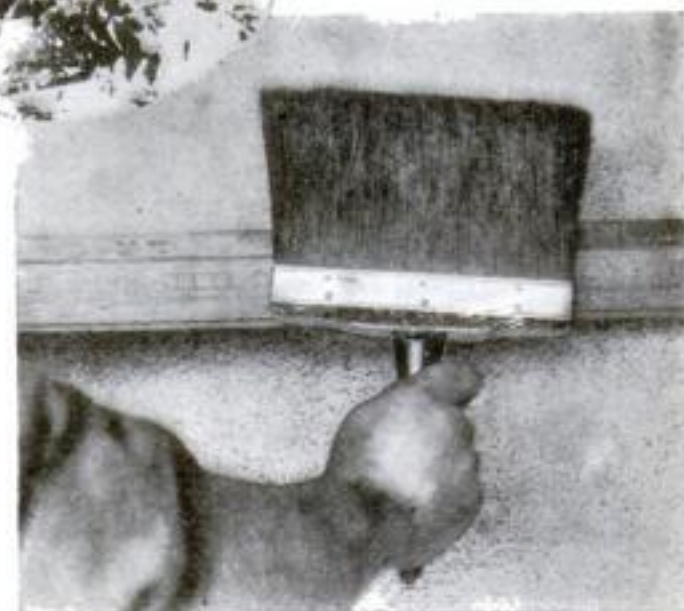


Fig. 3. In producing a spattered finish, the handle of the kalsomine brush is jarred smartly against a stick.



# ◀◀◀ PREPARE YOUR CAR FOR WINTER DRIVING

AN OUNCE OF PREVENTION NOW, WILL PREVENT  
A POUND OF TROUBLE WHEN WINTER COMES



**Eveready Prestone** does not contain any alcohol or glycerine.

## 9 POINTS OF SUPERIORITY

1. Gives complete protection. 2. Does not boil off. 3. Positively will not damage cooling system. 4. Will not heat up a motor. 5. Circulates freely at the lowest operating temperatures. 6. Will not affect paint, varnish or lacquer finishes. 7. Non-inflammable. 8. Odorless. 9. Economical—one filling lasts all winter.



*Thoroughly tested  
and 100% approved  
by the American  
Automobile Asso-  
ciation*

**EVEREADY  
PRESTONE**

(TRADE-MARK REG.)

FOR PREPARATION OF THE  
**PERFECT ANTI-FREEZE**

**A**FTER a summer's use every car should have some simple, inexpensive service to get it ready for cold weather.

There should be a fresh supply of winter-grade oil in the crankcase, transmission and differential. Spark plugs, ignition cables and battery should be at their best. See that the *cooling system* is *clean* and *tight*, then give your car the perfect protection of Eveready Prestone. One supply protects the car all winter.

Any garage will flush out the

cooling system, examine it for leaks, tighten up hose connections or pump glands—look over the complete system for a small fee. The earlier the better, for Eveready Prestone is unaffected by warm weather. One supply of this perfect anti-freeze will last all winter.

Eveready Prestone is the anti-freeze used by Commander Byrd, by the U. S. Navy and U. S. Army air forces. It is approved by automobile manufacturers and possesses *all* the properties which the

National Bureau of Standards has declared essential for an anti-freeze.

Eveready Prestone contains no alcohol and no glycerine—and is a pure, undiluted product.

Be ready before cold weather can harm your car. Have the cooling system of your car serviced and get a supply of Eveready Prestone today.

**NATIONAL CARBON CO., INC.**  
*General Offices: New York, N. Y.*

Unit of  and Carbon Corporation  
Union Carbide Corporation





## Ownership!

You're proud to possess PEXTO tools. Built by a manufacturer with 110 years' experience . . . who knows how! They'll be just as good tomorrow and for years as they are today. That's why "It Pays to Say Pexto".

It's a complete line, too . . . just about everything that you'll ever need. We'd like to send you booklet "S", and then the next time you're in a hardware store, ask the man at the tool counter to show you PEXTO. You'll find worth while

Hammers	Screw Drivers	Snips
Wrenches	Pliers	Squares
Chisels	Pruning Shears	Braces

**"It Pays to Say Pexto"**

**THE PECK, STOW & WILCOX CO**

Southington, Conn., U. S. A.

into the color on the board. The roll then is used to roll the color on the wall to form a decorative pattern.

One, two, or more colors may be applied in this manner. The ground color may be very light with dark overcolors, or the ground color may be a dark shade, upon which light tints are applied with the paper wad.

To produce a radically different pattern, the second and third colors may be spattered on instead of being applied with a sponge or newspaper wad. The ground color may be light or dark, and should be dry before the finishing colors are applied. Exceptionally interesting finishes are obtained by having the ground coat very dark; in fact, black is sometimes used for the ground for modern decorations, because on it the most brilliant of reds, blues, greens, and yellows do not appear too loud or gaudy.

The overcolors are mixed as usual. Then a 4-in. flat wall brush or, better yet, a Dutch kalsomine brush is dipped into one color and wiped out on the side of the pot. Take a heavy stick about 2 ft. long, hold it about 1 ft. from the wall to be spattered, and hit the metal binding of the brush—the handle—on the stick to jar the kalsomine color out in minute round spatters (Fig. 3). Try this on some old wall board or newspaper first to get the hang of it.

You need but little color in the brush. By holding the brush at various angles, you can control the direction of the spatters.

Many color combinations are possible

in this finish. A safe method is to apply a light or dark ground color and then spatter it with two or three shades or tints of the same color which are a few degrees lighter or darker. A single contrasting color may be added to give life, if desired. For instance, an ivory ground color spattered with cream and tan is interesting, but a contrasting color such as dull red, blue, black, or green may be added.

Gold or silver bronze mixed with glue and water or with one of the regular bronzing liquids are also used in these spatter finishes.

It is essential to cover up with newspapers or cloth any wood trim, such as door casings and baseboards, and the floor, while doing such a job, because the spatters cannot be controlled sufficiently to keep the trim clean. The papers may be stuck on to the wood trim

with glue, adhesive tape, or library paste, or may be held in place with pins.

Stencil designs can be used effectively in connection with mottled and blended kalsomine finishes on walls. Suitable designs may be placed on top of the ground coat of color and then the second or other top coats applied right over the designs in order to subdue their contrast. Figure 4 shows the use of a simple stencil motif of a candle in a bedroom finish. It was placed at random, not at regular intervals.

Mr. Vanderwalker, who is one of the leading authorities in the painting trade, told how to apply plain color kalsomine, in the January issue, page 78, and how to obtain various stippled effects, on page 102 of the June issue.

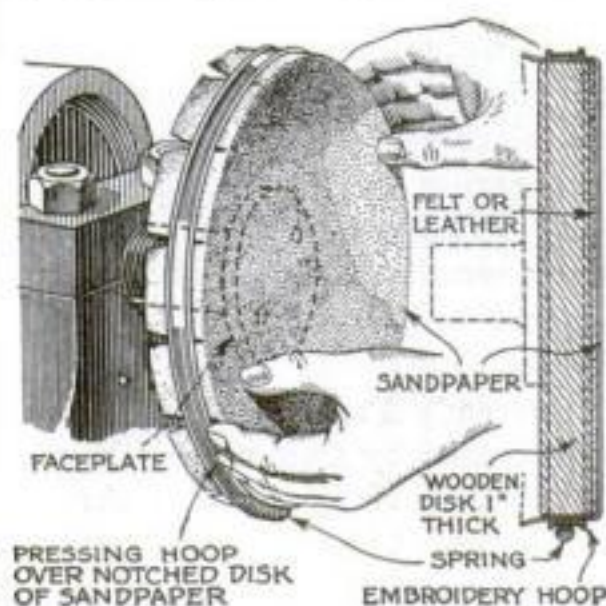


Fig. 4. Candle design stenciled on a bedroom wall to ornament the mottled kalsomine finish.

## Embroidery Hoop Improves Sandpaper Disk

WITH the aid of a large metal embroidery hoop of the kind having a spring to keep it taut, you can make a

practical and convenient disk sander for use on a small lathe or an electrical home workshop.



Disk sander on which the sandpaper is held securely by means of a metal embroidery hoop.

After buying the hoop at a ten-cent store or a department store, screw a block of wood about 1 in. thick to a faceplate and turn it to a diameter slightly larger than the inside of the metal ring. Cut the sandpaper about 2 in. larger in diameter and notch each piece as shown so that the edges can be bent over and fastened to the wooden disk by means of the embroidery hoop. Although not absolutely essential, felt or soft leather may be glued to the face of the wooden disk to make it softer.

This type of disk sander has two advantages; the entire surface is free for sanding, and the sandpaper can be quickly changed from coarse to fine as the work progresses or whenever desired. Furthermore, the work required to make the sander is trifling, and the cost for materials amounts to little.—A. E. MCCALL.





# Day-Fan delivers the NATURAL TONE



THE tone of Day-Fan Radio is distinctively different, simply because this set delivers broadcast sound truthfully, as never before. This is not accidental. It is the result of a well-considered decision by Day-Fan engineers. It is one of the fine achievements of sound, scientific development in the laboratory.

All frequencies are recreated in the audio-amplification system of the Day-Fan, just as they are originally created before the microphone. No attempt to "improve" upon the original by overemphasis of low tones. Instead, the true richness and resonance of the broadcast . . . and a new *brilliance* produced by silvery clear presentation of high notes.

Enjoy too the *responsiveness* of Day-Fan Radio . . . due to its sensitiveness and splendid volume amplification. It search-

es out the stations. It responds instantly to volume adjustments. It responds to tuning with a fine selectivity that separates the programs in a new and highly satisfactory way. It will bring in what you want, in the way you want, beautifully true and free from hum and noise.

Your name and address on the coupon below, mailed to us, will enable us to arrange a free demonstration for you. Don't miss hearing the Day-Fan.

Day-Fan Radio was developed with a sound, proved design as its basis. 9-tube matched unit set with a perfected electro-dynamic speaker is standard in each model.  
Model 69, less tubes \$225.00




Day-Fan employs two 245 tubes in push-pull in the power output stage, for wonderful volume without distortion.

(Left) Model 72, less tubes \$175.00

Accurate matching of impedances, stage by stage, produces a smooth flow of effective power. Day-Fan is surprisingly sensitive, and responsive to tuning.

(Right) Model 68, less tubes \$169.50

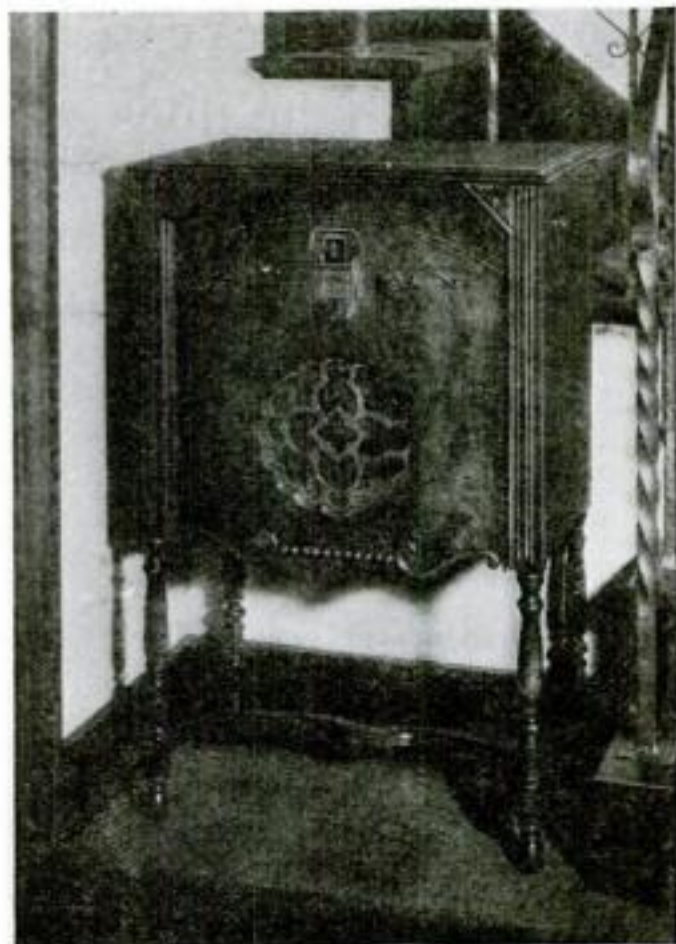

Day-Fan Electric Co., 1710 Wisconsin Blvd.

Dayton, Ohio: Please tell me where I can hear a demonstration of

# Day-Fan

## RADIO

Name \_\_\_\_\_

Address \_\_\_\_\_





**S**trong,  
well built,  
powerful.  
Drives or draws  
screws quickly and  
with little effort.  
The most useful  
tool you can have  
around.

Drop in at your  
dealer's and exam-  
ine these screw  
drivers---if he does  
not handle them let  
us know.

*If you love fine  
tools write for  
a copy of our  
Tool Hand-  
book---it's free  
for the asking.*

**GOODELL-PRATT  
COMPANY**

Greenfield, Mass. U. S. A.

**GOODELL  
PRATT**  
1500 GOOD TOOLS

# Casting Model Yacht Keels

By  
**J. G. PRATT**

**A**LTHOUGH model yachting has become a national pastime and much has been published on both the building and the sailing of miniature boats, little attention has been paid to casting keels, with the result that this work is generally turned over to a foundry. Yet the builder of a model yacht takes greater pride in his work if he makes everything, including the keel, with his own hands.

The 14-lb. keel for the 52-in. sloop shown in the accompanying illustrations was made by a method any beginner can follow successfully.

Fashion a pattern of the keel of white pine as shown at B in the drawing. One with a straight side is easier to make and has been recently pronounced more efficient than the bulb shape. As lead weighs about twenty-six times as much as



Pouring the lead keel of a large racing yacht model. The mold inside the wooden box is made of plaster.


pine, you can estimate what the weight in lead will be.

Float your boat in a tub and pile in 1-lb. bags of sand to find where the weight should be to give it the proper trim—that is, with  $\frac{1}{2}$  in. more freeboard at the bow than at the stern. Then build up or shave down the pattern accordingly, and sandpaper the wood. If there is any taper up and down, the keel should be thinner toward the bottom.

Screw together  $\frac{1}{2}$ -in. or thicker boards to form a strong box large enough to house the wooden keel and leave at least  $\frac{3}{4}$  in. in all directions (except at the top), as in the diagram marked A. With the box upside down, remove the bottom and insert the pattern as at B. Coat the



A 52-in. sloop constructed by Mr. Pratt. It has a 14-lb. lead keel, cast as told in this article.

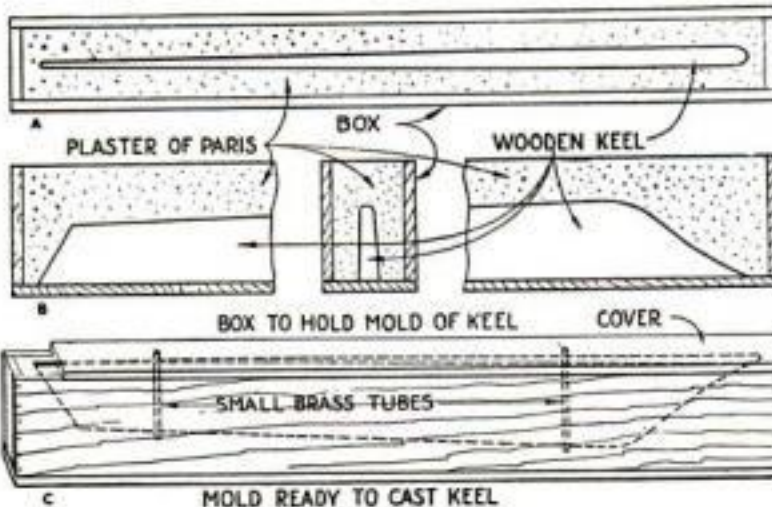

How the wooden pattern is placed in a box and covered with plaster of Paris, and how the mold is finally prepared for pouring.

The plaster mold, which has been cut open longitudinally to show its shape, and the rough casting.

sides of the wood with soft plaster of Paris; then pack the box full of plaster. Screw on the bottom and leave the box bottom up for an hour or more.

When the plaster is dry, remove the box top and withdraw the wooden keel. A grip can be secured by inserting a screw at each end.

To save trouble in drilling holes for the bolts, sections



▼▼▼

# Another Triumph of Alexander Senauke

▼▼▼

## Silvertone

### All Electric Radio

Complete with Tubes  
Delivered and Installed

Super-Electro Dynamic Speaker

Both Tubes and Sets Manu-  
factured under R.C.A. Patents  
and Guaranteed One Year

30 Days Trial  
Sold on Deferred Payments

**\$110**  
CASH PRICE

*Slightly higher in some states  
due to transportation charges*



#### Choose Either

7 Tube Screen-Grid  
(Including Rectifier)

Radio's newest achievement! Using two new type 224 screen-grid tubes and two new type 245 power tubes. Range and volume to thrill you!

Or

8 Tube Neutrodyne  
(Including Rectifier)

The time-tested Neutrodyne Circuit brought to its highest efficiency. Unsurpassed for realism and brilliancy of tone.

## FINALLY— the TONE and BEAUTY that you have looked for so long

Silvertone brings you performance such as you would expect to find only in higher-priced sets.

Acclaimed as the greatest achievement of Alexander Senauke, M. E., E. E., noted radio authority. Proclaimed a *masterpiece* in cabinet design by Lorado Taft, world-famous sculptor and designer!

Yet the new Silvertone costs but \$110—complete! Here is a new standard of radio value. Think of it—\$110 delivered and installed! Fully equipped with guaranteed Silvertone Tubes, super-electro dynamic speaker, and phonograph pick-up jack! *Both tubes and sets guaranteed one year!* Thirty-day trial. Convenient payments easily arranged.

See and hear the new Silvertone in your Sears-Roebuck Retail Store. If you do not live near one of our stores, you may order through the Sears-Roebuck catalog, sent free upon request.


# Sears, Roebuck and Co.

**300 Retail Stores Everywhere for Everybody**

Mail Order Plants at Chicago, Philadelphia, Minneapolis, Kansas City, Atlanta, Memphis, Los Angeles, Dallas, Seattle, Boston

© This seal on an advertisement in POPULAR SCIENCE MONTHLY signifies the approval of the INSTITUTE OF STANDARDS. See page 8.



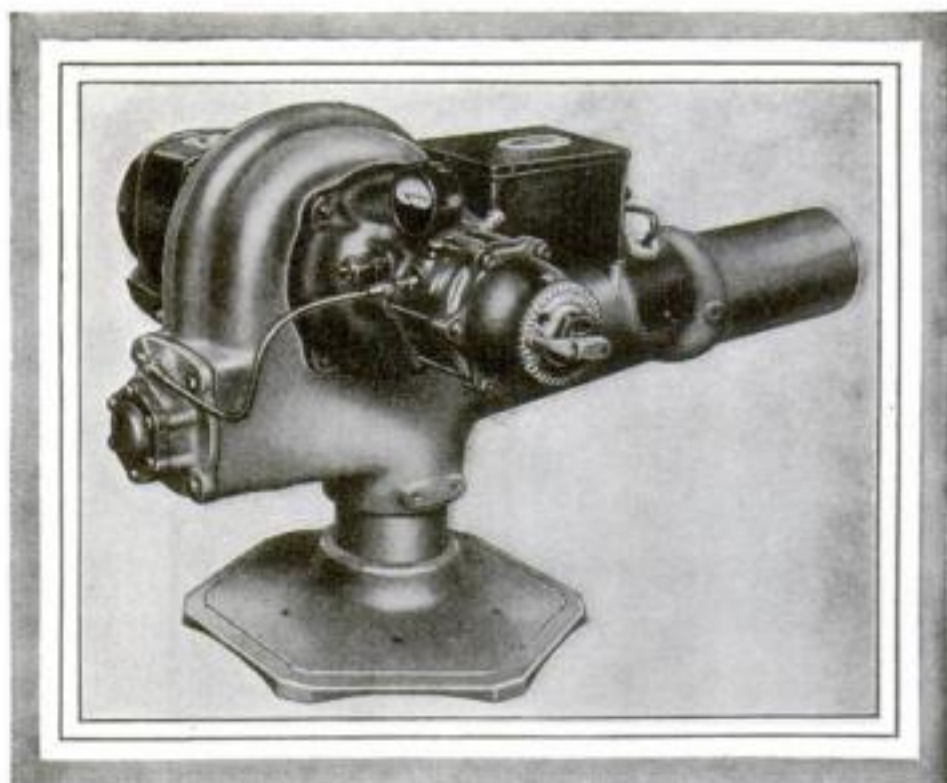

*At a new low price—*  
**FUEL OIL HEATING**  
*"A Williams Product"*  
**FOR YOUR HOME**

Here is the greatest home heating news since Williams perfected the first Oil-O-Matic more than a decade ago. Williams announces a new Oil-O-Matic JUNIOR at an unusually low price!

Has your house nine rooms or less? Oil-O-Matic JUNIOR offers you the comfort, convenience and healthfulness of Williams oil heating which burns lower priced

fuel oil as quietly and efficiently as does its big brother, Oil-O-Matic Model J.

This new fuel oil burner is built and backed by Williams—whose burners are heating more homes by far than any other make. More than 90,000 householders will tell you Oil-O-Matic heating is the greatest home convenience.

Get the facts now—mail the coupon today.

*"Hits of the Air"*

Williams Oil-O-Matics—Tuesday Nights, WJZ, WGN and associated NBC stations, 10:00-10:30 Eastern Daylight Time. Williams Oil-O-Matics—Friday Nights, WGN, Chicago, 8:30-9:00 Central Daylight Time.

**WILLIAMS**  
**OIL-O-MATIC**  
**HEATING**  
**JUNIOR**

WILLIAMS OIL-O-MATIC HEATING CORPORATION  
 BLOOMINGTON, ILLINOIS

**FREE**  
**HOME**  
**HEATING**  
**FACTS**

Williams Oil-O-Matic Heating Corporation  
 Bloomington, Illinois

Please send me all the facts on this new low priced Oil-O-Matic Junior. Tell me how I can install oil heating in my home by paying only a few dollars now.

Name .....


Address .....

City.....State.....

PS-10-9

of  $\frac{3}{8}$ -in. metal curtain rods or other tubes can be used as indicated at C. Get the exact positions by placing the wooden pattern on the boat and marking both where the bolts should go and their proper angle. The tubes are sunk  $\frac{1}{4}$  in. in the bottom of the plaster mold and are projected through the box top. Care should be exercised in centering them accurately.

The top is so placed that  $1\frac{1}{2}$  in. of the

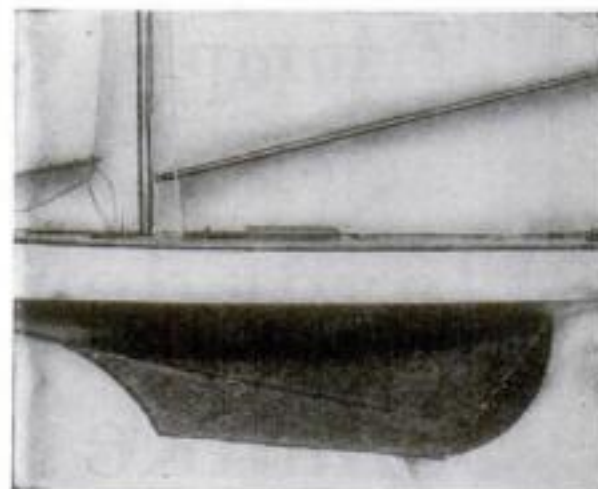


The finished keel in place on the model. The lead is smoothed with plane and sandpaper.

mold will be left open at one end for pouring the lead.


When the mold is thoroughly dried out, it should be blocked up securely at an angle of about  $30^\circ$ . Melt sufficient lead to fill the mold at one pouring if possible; otherwise do the pouring in two or more operations, as in the case of the keel illustrated. The sections weld themselves together, and a soldering iron will smooth out all trace of the crevice. In smoothing the keel, use a small iron plane and sandpaper.

Up to about 14 lb., it is satisfactory to bolt the lead permanently to the ship's keel, as indicated at D, and waterproof the bolt holes with white lead putty. For a heavier keel, however, it is more convenient to have tubes or "wells" from keel to deck, as at E, so that the bolts go clear through the ship. The keel then can be easily detached at the deck to lessen the strain on the hull when being carried.

In the latter case the handle or lift should be fitted on the underside of the deck, crossing the cockpit.

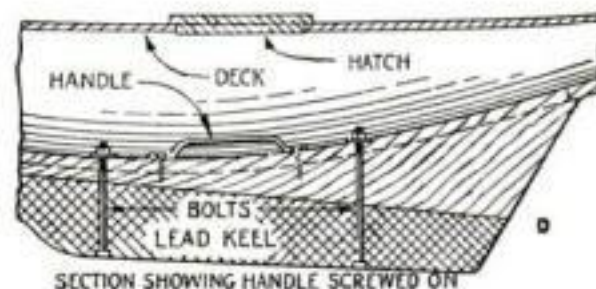

SECTION SHOWING HANDLE SCREWED ON

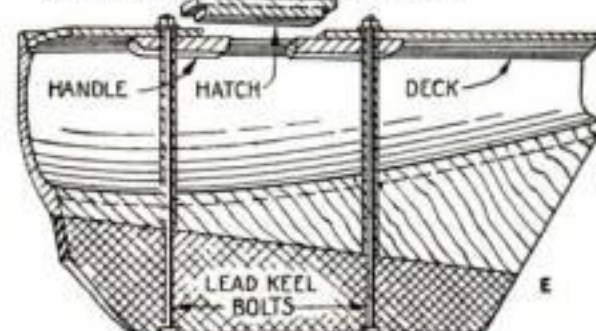

SECTION SHOWING HANDLE FITTED ON UNDERSIDE OF DECK ACROSS HATCH OPENING

Two ways to fit keels and handles to yachts, one for small and the other for large models.



**COMPLETE****\$89****WORKACE Electric WOODWORKER***Recognized everywhere as the standard outfit for home and commercial use!*Jig Saw Attachment for the Workace Electric Woodworker **\$10**14" Workace Band Saw, fast, accurate, economical..... **\$75**Workace Radial Saw quickly set at any angle..... **\$140**Workace high speed, direct drive, portable Electric Shaper **\$95**Workace Portable 4" Planer..... **\$25**

The most complete all-electric wood-working shop made. It's guaranteed for one year against defective parts and you can have it for only \$9 down. The Workace is fast, accurate, powerful and easy to work with; can be made to pay for itself either as a hobby or as commercial woodworking equipment. Nothing like it sold or advertised. Send for complete illustrated description of the Woodworker and other portable machines.

**J. D. WALLACE & COMPANY**

WILCOX STREET AND CALIFORNIA AVENUE, CHICAGO  
45 WEST 45th STREET, NEW YORK CITY  
268 MARKET STREET, SAN FRANCISCO

*Consult telephone directory for branch addresses in other cities***Low Price***includes all this:*

4" Planer  
8" Circular Saw  
6"x36" Lathe  
8" Disc Sander  
6" Buffing Wheel  
5" Emery Grinder  
1/4" Drill Chuck  
1/4 H.P. G.E. Motor,  
110-Volt, A.C., 60  
Cycle.

Endless V-Belt, two 4" and one 2 1/4" V-Belt Pulleys, Cast Iron Sub Base and 10 ft. Cable with separable Plug. The Planer and Circular Saws are each complete units and may be purchased separately at the correspondingly low price of \$25.00 each.

**EASY TERMS**

**\$9 down**  
**\$9 per month**

**MAIL THIS COUPON**


J. D. WALLACE & COMPANY,  
Wilcox St. and California Avenue,  
Chicago, Illinois

I want to know all about the Workace Electric Woodworker. Also interested in (Jig Saw) (Band Saw) (Radial Saw) (Shaper) (Planer)

Name.....

Address.....



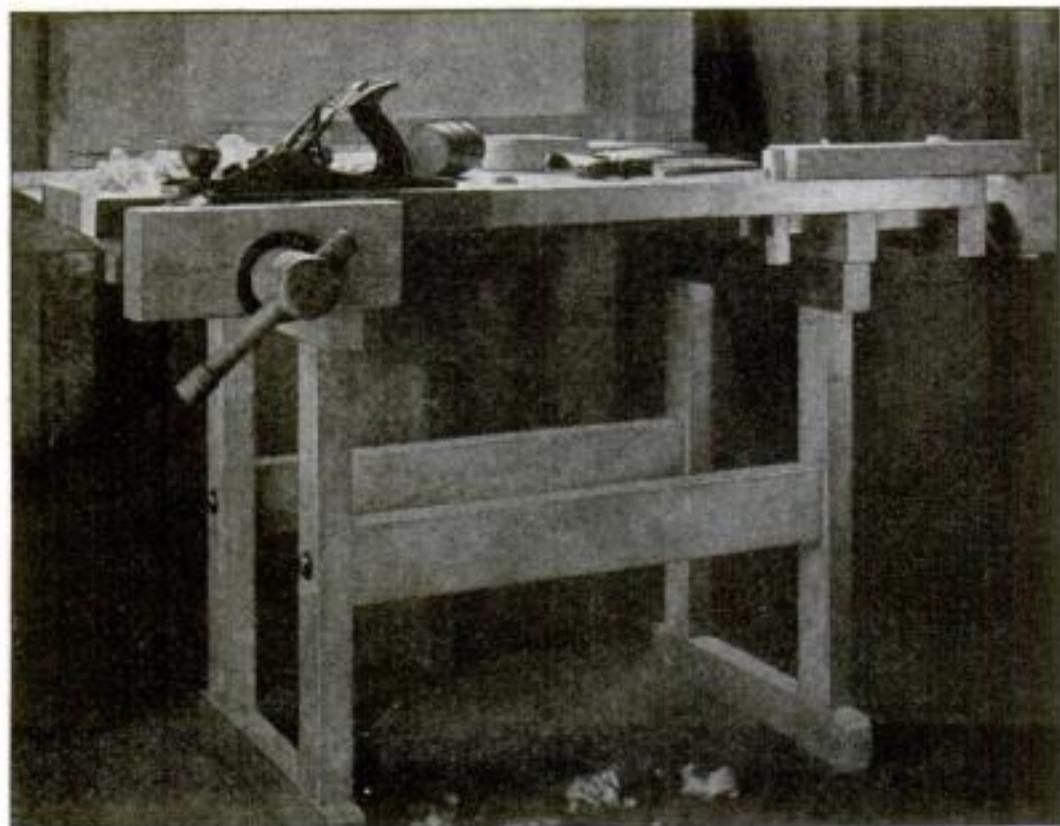

## A Work Bench..you can easily make yourself

### LePage's Complete Plans and Instructions Show You How



**LePage's Third Home Work Shop Book, only 10 cents, Shows How to Make These 20 Projects**

Cape Cod Chest of Drawers, Alexandria Nest of Tables, Old Salem Ship's Cupboard, Plymouth Built-In China Closet, Lady Washington Sewing Cabinet, Set-Back Book Shelves, Modernistic Desk, Modernistic Table, Modernistic Folding Screen, Chess and Checkers Table, Smoking Table, Caned Side Chair, China or Book Cabinet, Book Trough and Magazine Stand, Magazine Carrier, Vanity Case, Book Stand, Fernery Stand and Folding Sewing Screen.

What you have always wanted for your home work shop, a real work bench, in place of a makeshift table. Any man handy with tools can easily make this practical, substantial bench with the help of LePage's step-by-step printed directions and complete dimension drawings. It is an excellent introduction to the eleven other projects you can make with LePage's Job Plans and 20 other projects with LePage's Third Home Work Shop Book.

#### Expert Instruction

You have expert instruction to guide you. The designs, dimension drawings, photographs, step-by-step directions and the actual furniture itself were made by William W. Klenke, Instructor in Woodworking Central Commercial and Manual Training High School, Newark, New Jersey. His experience as an expert gives assurance that each project and the directions for

making it, are thoroughly practical.

To make the Work Bench as shown in the illustration, order LePage's Job Plan No. 24 at 10 cents. Look over the contents of LePage's book and the Job Plans available as shown in the column at the left. The price of the book is 10 cents. The Job Plans are 10 cents each and are for projects requiring more elaborate instructions than those shown in the Book. In all cases the instruction consists in printed step-by-step directions, dimension drawings or full-size patterns, and a photograph of the finished article.

#### Send 10 cents for LePage's Third Home Work Shop Book

Simply use the coupon below, sending it to us with 10 cents in coin or stamps, and we will at once send you a copy of this latest LePage's Book, postage paid.

### Job Plans 10 cents Each. Order by Number as Indicated in Coupon

- |                                  |                                |
|----------------------------------|--------------------------------|
| 16 Sheraton Writing Desk         | 22 Telephone Cabinet           |
| 17 Sheraton Desk Chair           | 23 Stool for Telephone Cabinet |
| 18 Colonial Hanging Book Shelves | 24 Manual Training Work Bench  |
| 19 Smoking and Reading Cabinet   | 25 Home Worker's Tool Cabinet  |
| 20 Colonial Mirror               | 26 Spanish Galleon             |
| 21 Tea Wagon                     | 27 Vanity Table                |

#### LEPAGE'S CRAFT LEAGUE

716 Essex Ave., Gloucester, Mass.

Gentlemen: Enclosed please find 10 cents (coin or stamps) in payment for LePage's New Third Home Work Shop Book. Please send a copy of this book to:

Name .....

Street .....

City ..... State .....

Please also send the following Job Plans (indicate by number those you want. See column at left), for each of which I enclose an additional 10 cents.

## Blueprints for Your Home Workshop

TO ASSIST you in your home workshop, POPULAR SCIENCE MONTHLY offers large blueprints containing working drawings of a number of well-tested projects. Each subject can be obtained for 25 cents with the exception of certain designs that require two or three sheets of blueprints and are accordingly 50 or 75 cents as noted below. The blueprints are each 15 by 22 in.

Popular Science Monthly,  
381 Fourth Avenue, New York

Send me the blueprint, or blueprints, I have underlined below, for which I inclose..... dollars..... cents.

#### Airplane Models

- 50. 36-in. Rise-off-Ground Tractor
- 69. Lindbergh's Monoplane (3-ft. flying)
- 82. 30-in. Single Stick
- 86. 35-in. Twin Pusher
- 87. 30-in. Seaplane
- 89-90. Bremen (3-ft. flying), 50c
- 102. Morris Seaplane (record flight 12 1/2 min.)
- 104. Tractor (record flight 6,024 ft.)

#### Furniture

- 1. Sewing Table
- 2. Smoking Cabinet
- 3. End Table with Book Trough
- 5. Kitchen Cabinet
- 11. Bench and Tilt Top Table
- 13. Tea Wagon
- 17. Cedar Chest
- 18. Telephone Table and Stool
- 19. Grandfather Clock
- 20. Flat Top Desk
- 21. Colonial Desk
- 24. Gateleg Table
- 27. Kitchen Cabinet Table
- 31. Two Sewing Cabinets
- 33. Dining Alcove
- 36. Rush-Bottom Chair
- 37. Simple Bookcase
- 38. Sheraton Table
- 39. Chest of Drawers
- 49. Broom Cabinet
- 60. Welsh Dresser
- 68. Magazine Rack Table and Book-Trough Table
- 70-71. Console Radio Cabinet, 50c
- 77. Simple Pier Cabinet and Wall Shelves
- 78. Treasure Chests
- 88. Modernistic Stand; Modernistic Bookcase
- 91. Modern Folding Screens
- 93. Three Modern Lamps
- 100. Modernistic Book Ends, Book Shelf, Low Stand

#### Radio Sets

- 103. One-Tube (battery operated)
- 42. Three-Stage Amplifier
- 43. Four-Tube (battery operated)

- 54. Five-Tube (battery operated)
- 55. Five-Tube Details
- 79. Electric
- 80. Electric High Power Unit
- 81. Electric Low Power Unit
- 97. One-Tube Electric
- 98. Two-Tube Electric
- 99. Four-Tube Electric
- 109. Screen-Grid Set

#### Ship Models

- 44-45. Pirate Galleon or Felucca, 50c
- 46-47. Spanish Treasure Galleon, 50c
- 48. 20-in. Racing Yacht
- 51-52-53. Clipper—Sovereign of the Seas, 75c
- 57-58-59. Constitution ("Old Ironsides"), 75c
- 61-62. Viking, 50c
- 63-64. 29-in. Toy Motor Boat, 50c
- 74-75-76. Santa Maria (18-in. hull), 75c
- 83-84-85. Mayflower (17 1/2-in. hull), 75c
- 92. Baltimore Clipper (8 in. long)
- 94-95-96. Mississippi Steamboat, 75c
- 106-107. 42-in. Racing Yacht, Sea Scout, 50c
- 66. Ship Model Weather Vane
- 108. Scenic Half-Model of Barque

#### Toys

- 28. Pullman Play Table
- 29. Tea Cart, Wheelbarrow, and Garage
- 56. Birds and Animals
- 67. Lindbergh's Plane
- 72. Colonial Doll's House
- 73. Doll's House Furniture
- 101. Fire Engine, Sprinkler, Truck, Tractor

#### Miscellaneous

- 9. Arbor, Gate, and Seats
- 15. Workbench
- 23. One-Car Garage
- 26. Baby's Crib and Play Pen
- 30. Tool Cabinet, Boring Gage, and Bench Hook
- 34. Garden Trellises
- 65. Six Simple Block Puzzles

Price 25 cents each except where otherwise noted

Name.....  
(Please print name and address very clearly)

Street .....

City and State .....

Mail This  
Coupon

# LEPAGE'S GLUE

HANDIEST TOOL IN YOUR WORK SHOP





# With EVEREADY RAYTHEON 4-PILLAR Tubes, you can get the MOST from your present radio receiver

PEOPLE in all parts of the country are telling of the greater power, increased distance, improved tone, and quick action of these remarkable new tubes. The reason is that

Eveready Raytheons are built stronger—immune to the bumps and jolts of shipment and handling. They come to you in as perfect condition as when they leave our laboratory test room.

types. At your dealer's. He also has the famous B-H tube for "B" eliminator units.

NATIONAL CARBON CO., INC.  
General Offices: New York, N. Y.

Unit of **UCC** and Carbon Corporation  
Union Carbide



Showing the exclusive, patented Eveready Raytheon 4-Pillar construction. Note the sturdy four-cornered glass stem, the four heavy wire supports, and the bracing by a stiff mica sheet at the top.

The Eveready Raytheon 4-Pillar construction is exclusive and patented. Examine the illustration at the bottom of this page. See how the elements of this tube are anchored at eight points.

This is of particular importance in tubes of the 280 rectifier and 224 screen-grid type which have heavier elements, and in tubes used for push-pull audio amplification, where uniform characteristics are most essential. Eveready Raytheon 4-Pillar Tubes come in all



Eveready Raytheon Screen-Grid Tube, ER 224. Without Eveready Raytheon's 4-Pillar construction, this type of tube is delicate, liable to severe damage in shipment.



Trade-marks



# NEW THRILLS

## Every Mile



HEAD your new Harley-Davidson "45" Twin up the longest hill you know—feel the thrill of surging power that whisks you up and over.

Swing out on the straightaway—feel the thrill of the lightning getaway and quiet speed that answer the throttle so eagerly.

Speed over a rough stretch—feel the thrill of the cradle-like springing and big 4-inch balloon tires that smooth all roads out for you.

Hurry down to the nearest Harley-Davidson Dealer—look over the 1930 model "45" Twin—then ride out and feel these thrills, and more! Ask about his Pay-As-You-Ride Plan.

Mail the Coupon for Illustrated Literature.

# HARLEY-DAVIDSON

## Motorcycles

HARLEY-DAVIDSON MOTOR CO.  
Dept. P. S., Milwaukee, Wis.  
Interested in your motorcycles. Send literature.

Name.....  
Address.....

My age is ☐ 12-15 years ☐ 16-19 years ☐ 20-30 years ☐ 31 years and up. Check your age group.

### Home Workshop Chemistry

Simple Formulas that Will Save Time and Money



ONE job in the home that is no joke is polishing tarnished metal. Nickel and nickel-plated articles do not tarnish as readily as some of the other metals such as silver and brass, but to keep them in good condition, they should be frequently washed in hot, soapy water. Dry them with soft cloth or, better still, with paper, especially newspaper, the light abrasive quality of which is well suited to keep nickel in a high polish.

Nickel that has become dull—that is, severely tarnished—requires a mild abrasive like whiting (precipitated chalk) and similar fine scourers. These may be powdered pumice, of which various grades may be obtained, or tripoli (also known as diatomaceous earth, infusorial earth, diatomite, and kieselguhr). The finer and softer the powder is, the less chance is there for destroying the plating or scratching the surface. When the plating is broken, replating is the only remedy.

It makes absolutely no difference what kind of polish is used, whether in liquid, paste, or solid form. The dry powder may be used if dusted on a moist but not wet piece of clean cloth. Rub thoroughly and dry with a clean rag.

A more convenient liquid polish may be made by filling a bottle (of about 2 or 3 ozs.) half full of the powdered abrasive and covering the powder with denatured alcohol. Shake the bottle and fill it with water. This polish must be shaken thoroughly before being used.

A good but inflammable polish may be made by dissolving 1 oz. of paraffin in 7 oz. of gasoline and adding 2 oz. of abrasive, such as F or FF pumice—a grade that is not too fine. This will not only polish the nickel or other metals but also will provide a very thin protective covering of paraffin.

A solid cake is perhaps the most convenient form for the polish. This may be most easily made by mixing thoroughly two parts of plaster of Paris with four parts of abrasive. After the dry powder has been mixed, add water to form a thin paste and pour into forms to dry and harden. To use this polish, moisten a rag, apply it to the cake to take off a little, and then rub the metal.

Acids cannot be recommended. They do take off the worst of the tarnish and even corrosion, but usually the corrosion is back worse than ever in a short time. When the under metal has been exposed, renickeling is all that can be done.



Pouring polish into small molds to harden.



# Have Fun Making Money through the Arts!

Yes, you can—anybody can make a lot of money right at home, and what's more, have real fun doing it. We show you how. We furnish complete outfit for work and give you this big assortment of giftwares without extra charge.



**FREE of extra cost**—Send coupon for details of our amazing new plan. It tells you how to get a big assortment of giftwares worth \$63.10—24 separate articles—without a cent of extra cost.

## Men and Women Earn \$10 to \$50 a week, painting these artistic objects at home this Easy Way

A business of your own. \$10 to \$50 a week. Your own gifts for friends at wholesale prices. Furnishings for your home. Beautiful imported art wares. The admiration and envy of all your friends. All this can quickly be yours. Whether man or woman, you can learn the fascinating new profession of Art-crafter right in your own home.

You don't have to know how to draw. No experience required. We show you everything and tell you the secret of Fireside's famous "Three Step Method." Almost overnight you find yourself decorating beautiful, exclusive Fireside Creations. And the best thing is that you can work

either spare time or full time. There is no limit to the profits you can make.

By our new plan we furnish complete outfit and give you a big assortment of giftwares free of extra charges. When you paint them as we show you they have a value of \$63.10. No extra cost for any of these things. This assures you a good profit and a big start without extra investment.

You don't do any peddling or canvassing. When you have decorated your first gift assortment, we show you exactly how to dispose of it at a profit. From then on you can make from \$10 to \$50 a week as many of our members do.

### FREE MAIL COUPON FOR IDEA BOOK ON DECORATION HOW TO GET GIFTWARES WITHOUT EXTRA COST

Write or send coupon at once for your copy of this valuable book. It is free. It tells you how to become Fireside Member and get all advantages and privileges outlined here; how to get artist's outfit and this assortment of giftwares with membership and

how you can start making money without leaving your home. Don't miss this opportunity. It costs nothing to find out. You are not obligated in any way by sending for the book. Mail the coupon today.

**FIRESIDE INDUSTRIES**  
Dept. 51-P, Adrian, Michigan

*Mail Coupon Today*

**GOOD for PLAN**

**FIRESIDE INDUSTRIES**

Dept. 51-P, Adrian, Michigan.

Tell me how to get (1) Big Assortment of giftwares (2) Complete artist's outfit of materials (3) Privileges of Fireside Membership (4) Plan for profit-making on easy basis. I am not obligated in any way and this information is Free

Name.....

Address.....


City.....State.....

(Write in Pencil—Ink will blot)

**COSTS NOTHING** to learn about our plan. All details are given you free. Send coupon at once for beautifully illustrated idea book telling all about wonderful plan that has made so many women independent. Learn how easy it is to make from \$10 to \$50 a week in the most delightful home work you can imagine. Learn how to get the assortment of giftwares shown on this page without extra charge as part of easy and dignified plan for making money at home. Don't miss this opportunity. Send coupon now. Book and Plan are Free.





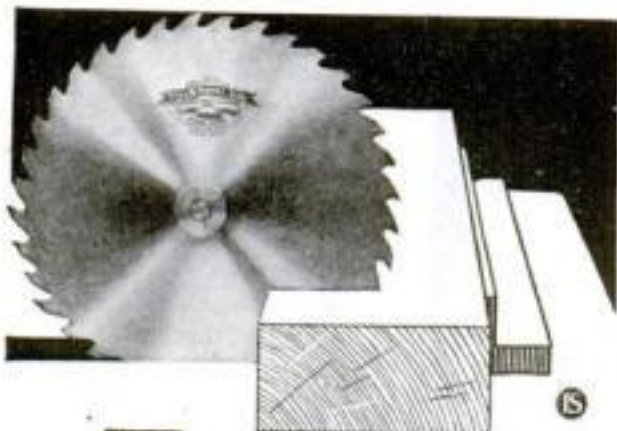

## For every sawing job in the home workshop

**H**ALF the satisfaction in operating a portable rig comes from using saws that hold sharp cutting edges—like Simonds Circular Saws.

Exactly the same steel that's used in Simonds Saws made for the large industrial plants, is used in Simonds Small Circular Saws for all portable types of electric sawing outfits. That's the big reason why these saws cut faster and stay sharp longer.

If your dealer can't supply you we will gladly forward you any of the Circular Saws listed below upon receipt of listed price.

When ordering state size of arbor hole.

6 inch \$3.30	10 inch \$5.60
8 inch 4.40	12 inch 7.00

**SIMONDS SAW AND STEEL CO.**  
FITCHBURG, MASS.

"The Saw Makers" Established 1832

Branch Offices and Service Shops in Principal Cities



# Machine for Molding Edges

*Built at Relatively Low Cost, It Gives  
Homemade Furniture a Professional Look*

By W. CLYDE LAMMEY

**N**O DOUBT every home worker at one time or another has viewed with certain envy the neatly molded curved edges that are a characteristic of many fine pieces of furniture. Such a molding is comparatively easy to form where it is straight; but when it must be applied to curved edges, it gives a hard challenge to every workshop enthusiast.

The ordinary 'commercial type of shaper or former used for such work has one or more vertical spindles extending above a smooth-surfaced table. The spindle carries the former knife and is driven by a friction mechanism that allows reversing it at will, which is often necessary where the knife must cut across the grain.

Two types of cutters, made in a wide range of shapes and sizes, are generally used on these machines. One of these is known as the "wing" cutter and is reversible; that is, it has four edges that cut while rotating in either direction. The other is a "solid" cutter and cuts only one way, but it requires less power and is used for all but the finest work.


The amateur woodworker who already has a motorized shop and is accustomed to using woodworking machines can make this former at relatively small cost and thus open for himself in a moderate way a field seldom touched by any but artisans with the best of equipment. Only a skilled woodworker should use the machine, however, because the exposed cutter revolves at high speed and is exceedingly dangerous. The machine must be operated by a careful, cautious, and well-trained mechanic.

**A**N ORDINARY polishing head of a good quality carries the former knife. The one used by the author cost four dollars. Get two very small compression grease cups with a tap to suit and remove the spindle, ream the oil holes to size, and tap out for the cups. A positive means of lubrication is absolutely essential as the spindle must operate at high speed—not less than 3,000 revolutions per minute for the best work.


Before buying a cutter, the worker should consider the kind of molding that will best serve the need. As a rule a cutter of the form known to woodworkers as "O.G." will be found to give the widest range of usefulness where but one is used. Raised and lowered on the spindle by means of washers, it may be adapted to different thicknesses of stock if the need

arises. The solid cutter is the least expensive, does good work, and in the size adapted to the 1/2-in. spindle of the polishing head ordinarily will cost from seven to twelve dollars. It is made from high-speed steel and may be ground at any time without changing the shape.

Two things must be made sure of when purchasing the cutter (which may be obtained without difficulty from any woodworkers' tool works where these knives are made up): The thickness should not be greater than

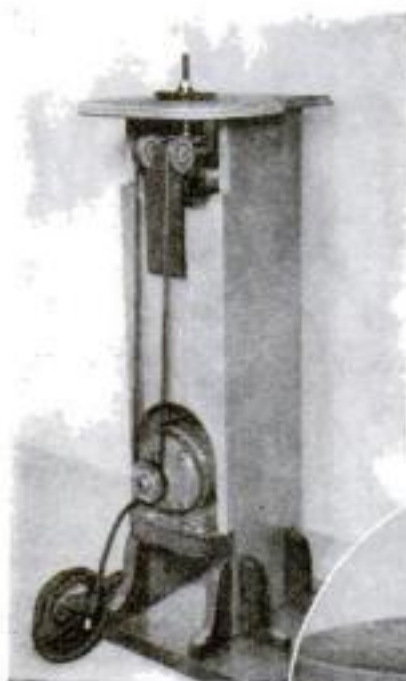

Shaping machine with a dado head in position for cutting grooves in curved parts to be used in making furniture.

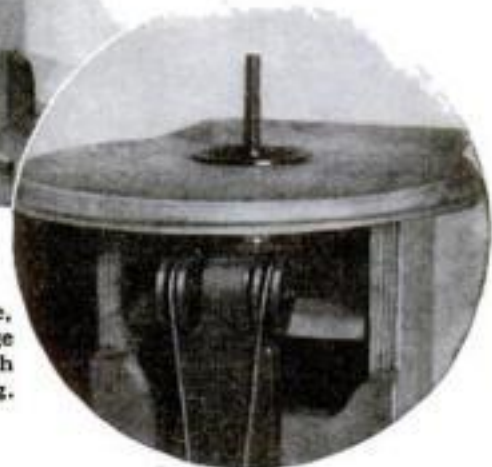

Guide pulleys, table, and spindle. The large fiber collar is used with a cutter for grooving.

3/4 in. or less than 5/8 in.—1 1/16 in. is about right. The lower diameter of the cutter should be 1 1/8 in. to make the proper shoulder on the lower edge of an "O.G." cut. If the cutter cannot be obtained exactly this size or it is otherwise desired to have it smaller, the collars may be filed to fit neatly by hitching the motor on after the head is in place, but use the utmost care in filing.

Put together the base and pedestal in a substantial manner with screws and glue as shown in the drawing marked Fig. 1. Leave the piece on the belt side off for the time. An opening for the motor is cut in this piece, and the space below the shelf is left open so that the bolts may be tightened and loosened easily.


In mounting the polishing head, the inside collar on the spindle (the lower collar when the spindle is vertical) should extend 1/8 in. above the surface of the table as shown. While this dimension is arbitrary and may be more or less, an "O.G." knife 1 1/16 in. thick cuts a symmetrical molding on 1 1/16-in. stock—which is the ordinary thickness of so-called 1-in. hardwood—when mounted in this way.



The small shelf illustrated on page 118 shows the work done by a knife of this description and size. The extension of the collar above the table is important, as in practice the stock is held against it when making the cut, thus enabling the operator to keep control of the work at all times. It is possible to work in any circular form the diameter of which is not less than the spindle collar.

**T**HE maple support under the lower bearing is bored to fit the spindle and serves to steady the head while in operation. Ream out the holes in the iron base and bore two others for small bolts, as screws are likely to work loose and cause trouble. No vibration of the head can be tolerated.

In the drawing marked Fig. 2 is shown the ball bearing guide pulleys adapted

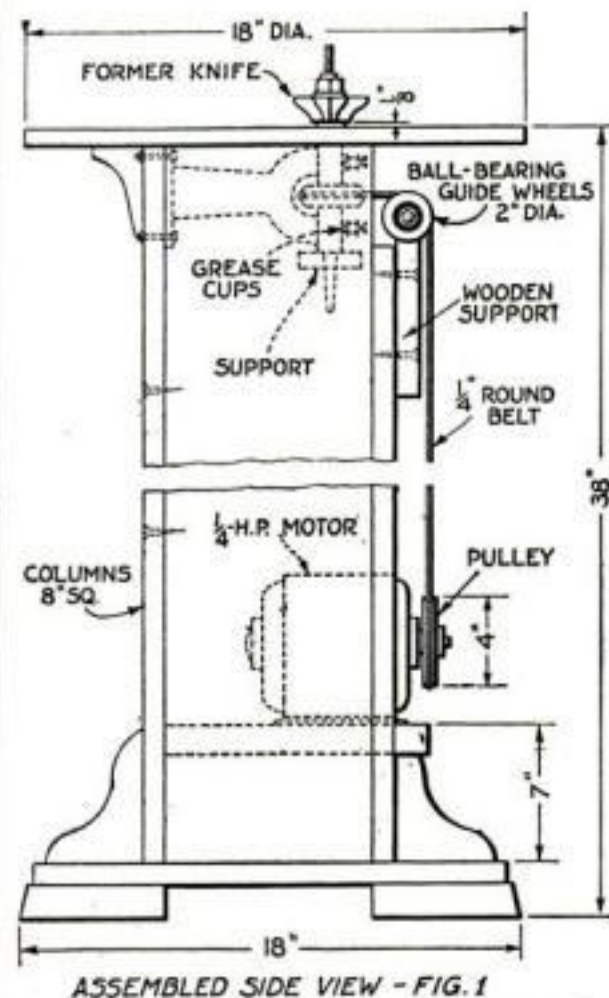

How the grinding head and motor are mounted in a neat, substantially built wooden pedestal.

from the bearing assemblies in two discarded roller skate wheels. The wheels selected should be of the double ball-race type. Cut through the thread of the skate wheel with a hack saw and pry off the rim, which will release the bearing assembly. Turn the guide pulleys from tough hardwood, such as maple. Bore them (while still on the lathe faceplate) so that the cone races will fit snugly on both sides of each pulley. Cut the threaded shaft out of the skate frame with the hack saw and fit it snugly through a piece of wood of the form shown in one of the photographs. Assemble the wheels on this shaft, taking care to have the inside cone nuts tightened against the wood so as to hold the shaft securely. Lubricated with a little heavy oil, the pulleys will run silently and without vibration under a tight belt.

Have the stock carefully sawed to the outline desired and the curves all perfectly true, otherwise the molded edge will be wavy. By using fiber collars of different sizes, it is possible to make diffi-

# Screw-driver for Handymen



Driving screws at express speed.

## It drills holes

countersinks the holes for the screwheads, and drives in the screws — all simply by pressing on the handle. In same way, it runs up small nuts. And all at express speed!



Fast drilling with the "Yankee" Spiral.

**T**AKES out screws same way — by pressing handle. Or it drills holes, countersinks the holes, drives or draws screws, by ratchet movement.

It is a Spiral Screw-driver or a Ratchet Screw-driver, either right or left hand, or a Rigid Screw-driver, at will.

With the spiral movement, the drill or bit is revolved by a spiral in the tool, when handle is pressed down.

With ratchet movement, you turn drill or bit by moving the hand forward and back without releasing your grip on handle.

Both spiral and ratchet movements are instantly available. They may be used successively: sending screw in by spiral and setting it up by ratchet.

A simple adjustment makes it a 13-inch screw-driver, or, for

long overhead reaches, an 18 1/4-inch screw-driver.

With a bit for small screws, another for medium screws, and a third for large screws, it is three different size screw-drivers.

A fourth bit, with the "Yankee" Screw-holder Attachment, places and drives screws one-handed, in hard-to-get-at places.



Screw-holder

A fifth bit holds and drives screw-eyes.


Eight "Yankee" Drill-points, for boring holes 1-16" to 11-64", with special chuck for holding the drills, are supplied for this screw-driver.



Countersink

Countersink is provided, fitting into the tool same as screw-bits.

Sockets for running up nuts, are made to fit into this tool.

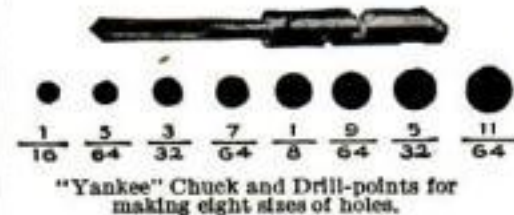

"Yankee" Chuck and Drill-points for making eight sizes of holes.



Simple adjustment makes it 18 1/4 in. driver for long overhead reaches.

Spring in handle makes it the "Quick-Return." Great for working one-handed.



Handymen who want a boring and screw-driving tool that will work any place, will buy the "YANKEE" SPIRAL RATCHET SCREW-DRIVER

With These Attachments:

3 Screw-driver Bits, 1 Bit with Screw-holder, 1 Bit with Screw-eye Holder, 1 Chuck (for holding drills), 8 Drill-points, 1 Countersink. And (for jobs calling for small nuts), 1 Hexagon Socket.

No. 30-A.—Standard Spiral Ratchet Screw-driver used the world over by skilled mechanics. Price, for tool with three screw-driver bits, \$3.00.

Also made Heavy and Light Patterns.

No. 130-A.—Spring in handle makes it the Quick-Return Spiral Ratchet Screw-driver. Price, with three bits, \$3.45. Also Heavy and Light Patterns.

"Yankee" Attachments sold separately. Your dealer can supply you.



## FREE "YANKEE" TOOL BOOK

To Help You Make Things, we will send book with action pictures showing the ingenuity in use of many "Yankee" Tools. Mail this coupon to NORTH BROS. MFG. CO., PHILADELPHIA, U. S. A.

Name..... Address..... (ps)





WHAT YOU SEE



WHAT YOU DON'T SEE

## Tree Surgeon

**WHAT YOU SEE:**

A skilled Davey tree surgeon, saw in hand, climbing a tree with surprising agility. Presently he will use that saw to remove dead branches—to save the life of the tree.

**WHAT YOU DON'T SEE:** The thorough shop training in saw filing which the tree surgeon receives at the Davey Institute. The file he is using is a Nicholson Slim Taper, chosen because the Davey tree surgeons "have always found Nicholson Files unusually satisfactory."

You can obtain Nicholson Files in shapes and sizes for all demands from your hardware or mill supply dealer.


**NICHOLSON FILE CO.**  
Providence, R. I., U. S. A.



**NICHOLSON FILES**  
A FILE FOR EVERY PURPOSE

cult cuts in two or even three operations.

Always have a firm hold of the stock before presenting it to the knife. Be sure that it is flat on the table and work slowly to prevent splintering or otherwise haggling the edge. Take the utmost care to keep your fingers away from the cutter and be sure to roll up your sleeves before starting work. Allow no boys to operate the machine.

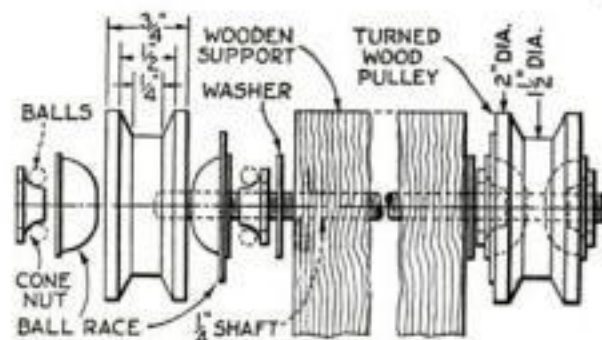


BALL-BEARING GUIDE WHEELS - FIG. 2

Ball bearing guide pulleys made from parts taken from wheels of discarded roller skates.

If you own a small bench saw, the special dado heads will generally fit the  $\frac{1}{2}$ -in. spindle of the polishing head. If this is so, it will add materially to the versatility of the machine. If no dado is available, a small grooving saw may be purchased for a nominal sum and will be useful for internal grooving and rabbeting.

When either saw or dado is used, get a piece of  $\frac{1}{8}$ -in. fiber, and if the dado is 4 in. in diameter and the groove must be  $\frac{1}{4}$  in. deep, cut the fiber to  $3\frac{1}{2}$  in. diameter and bore a hole of such size that it will fit the spindle collar, as shown in one of the photographs. Be sure that the fiber is a true circle, otherwise the cut will vary in depth. Hold the stock (as in making the curved top of a mirror frame, for instance, or where it is necessary to let panel work into a curved frame) against the fiber collar, and an internal groove will be cut

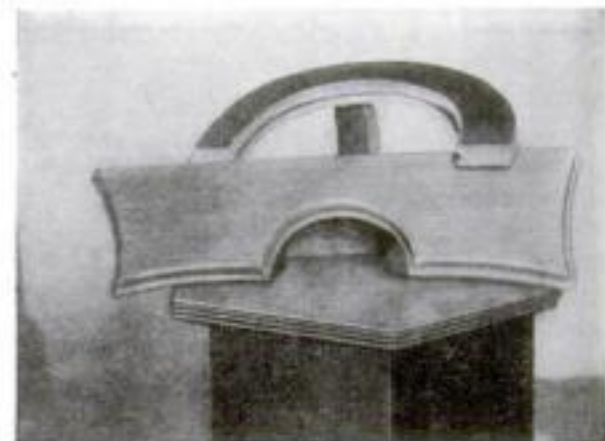

Two examples made with the homemade former. The upper piece shows internal grooving done with a dado head; the lower is a shelf.

in the work as neatly and accurately as could be desired. By means of washers on the spindle proper the position of the groover can be changed to any height within the limits of the thread.

IF AN ordinary T-handle of the type furnished with many lathe chucks is replaced with a handle made on the order of a crank, the operator can change jaws in half the time usually required. When a part is being chucked, the crank wrench can be operated reasonably well with one hand while the work is held with the other.—R. M. KOCH.



## General Utility Tamper Made of Concrete

CONCRETE can be used in making an inexpensive tamper for cement work and odd jobs about the garden. All that is required is a tin can 5 or 6 in. in diameter, with the top removed.

Drive several nails into the end of a suitable hardwood handle so as to form radiating projections. Insert the stick



The concrete for this tamper is cast in a tin can and thoroughly seasoned in some damp place.

into the can and pour thoroughly mixed concrete around it. See that the handle is placed as nearly in the center of the can as possible and that its lower end is  $1\frac{1}{2}$  in. up from the bottom.

The mixture should harden at least twenty days in a damp place, when it will be firm and much more tough than ordinary concrete. This is important, because the tamper must stand severe battering at times. It is ideal for driving stakes, tamping soil, leveling spots about the lawn, and similar uses.—H. W. SWOPE.


## Hints on Model Airplanes

A STRONG type of joint for light model airplanes, especially those having a framework of delicate bamboo members, can be made as shown at A. The members are butted together and fastened with an ambroid type cement; then reinforcing fillets of a plastic wood composition are added. Wing spars less

than half the size ordinarily used are quite practical if the ribs are cut as shown at B. The construction is very strong and light. The silk or paper covering can be stretched tightly on the frames and the

usual warping effect of the dope is minimized.—EDWARD W. BLACKMAN.

SOME home workers fail to realize the importance of tool quality and tool condition. A skilled mechanic finds that even with the best tools his skill is taxed to produce work of first-rate quality.



A reinforced joint and a rib for a light wing.

# 7 Shaves for a Postage Stamp



That is all it costs you to try  
this unique new shaving  
method—we stake every-  
thing on this free trial

### GENTLEMEN:

The postman is our best salesman. For he brings the test that wins men to our new product. The product actually sells itself daily in the greatest laboratory of the world—America's bathroom.

Each morning hundreds of new users try Palmolive Shaving Cream at our expense. And 86% of them, we find, discard their former methods for it. Thus, our problem is to get men to take our test. To sign and mail the coupon.

If we can win so many millions in so short a time, surely you want to try this remarkable cream yourself. We do not want to sell you sight unseen. First let us prove our case—then you will want to buy.

### Mail coupon—learn these 5 points

After rejecting 129 experimental formulas, our laboratories succeeded in embodying—all in one shaving cream—the 5 things men had asked for. 1000 men had been consulted, had given their advice.

- 1: Multiplies itself in lather 250 times.
- 2: Softens the beard in one minute.
- 3: Maintains its creamy fullness for ten minutes on the face.
- 4: Strong bubbles hold the hairs erect for cutting.
- 5: Fine after-effects due to palm and olive oil content.

Now, whether your old shaving preparation suits or not, try ours. *You* risk nothing. *We* undertake, in 7 shaves, to win you. It's an open-and-shut proposition, and you are the judge. So won't you mail the coupon?

To add the final touch to shaving luxury, we have created Palmolive After Shaving Talc—especially for men. Doesn't show on the face. Try the sample we are sending free with the tube of Shaving Cream.



**PALMOLIVE RADIO HOUR**—Broadcast every Wednesday night—9:30-10:30 p. m., E.T.; 8:30-9:30 p. m., C.T.; 7:30-8:30 p. m., mountain time; 6:30-7:30 p. m., Pacific time—over station WEAF and 39 stations associated with The National Broadcasting Company.

## 7 SHAVES FREE

and a can of Palmolive After Shaving Talc

Simply insert your name and address and mail to  
PALMOLIVE, Dept. B-3101 New York City  
P. O. Box 375 Grand Central Post Office

Please print your name and address



# ATKINS SILVER STEEL SAWS

for  
**YOUR  
HOME  
WORKSHOP**



C. Earl Palmer,  
Wilmette, Ill.,  
won the July Home  
Workshop Photo  
Prize with this pic-  
ture of his splendidly-equipped  
home shop.

## Seven Popular Saws and Tools for Your Home Workshop



"400" and "401" are finest Hand Saws made. Silver Steel Blades. Perfection Handles—no wrist strain.



All sizes of Silver Steel Circular, Rip or Cross-Cut Saws for fast cutting on power outfits.



Every shop needs this Back Saw for fine work. Rigid Silver Steel Blade; 8 to 18 in. lengths.



Using these Dado Heads is the quick way to cut smooth grooves of  $\frac{3}{8}$ " to 4" in width.



Nickel steel adjustable frame, pistol grip handle; Non-Breakable or Silver Steel Blue-End Blade.



Atkins makes Silver Steel Narrow Band Saws in many widths and lengths for workshop machines.



We make Machine Knives for small shop planers, up to the largest knife-cutting job.

**WIN  
\$10**

We pay \$10 for best photo of a Home Workshop, each month. Check Coupon for full details.

## Start a Home Shop

**T**HINK of all the useful things you could build in spare time . . . the dozens of repair jobs you could do . . . the dollars you could save and the fun you could have . . . if you had a workshop and a set of good tools.

Start a home workshop now! Select the tools you need at your hardware store. Saws to cut wood or metal are your most important tools, so buy the best. Your dealer can show you a full line of ATKINS Saws, made of the world-famous "Silver Steel" that cuts faster, easier, holds its edge longer and outlasts any other saw steel.


You can get ATKINS Hand Saws for cross-cutting or ripping! Circular Cross Cut or Rip Saws in sizes to fit any power sawing outfit! Back Saws to do fine work in cutting mitres, grooves, etc.! Dado Heads to cut smooth grooves quickly! Hack Saw Frames with Blades that cut metal twice as fast and last six times longer! Narrow Band Saws for scroll work, etc.! Machine Knives for small planers! Cabinet Scrapers, Grinding Wheels and Files, Saw Filers, Saw Sets and hundreds of other fine tools for home craftsmen.



Send coupon below for helpful booklets every tool user should have.

**Mr. Happy Man Says:**

**"GET THESE 4 FREE BOOKS"**

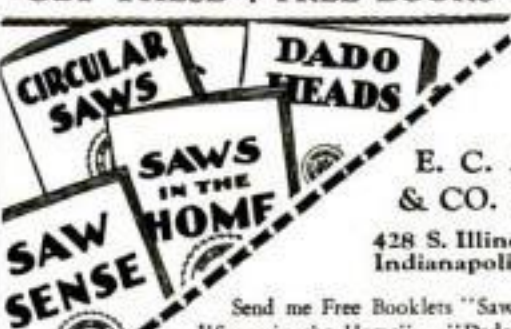

**E. C. ATKINS  
& CO. Est. 1857**

428 S. Illinois Street,  
Indianapolis, Ind.

Send me Free Booklets "Saw Sense" —  
"Saws in the Home" — "Dado Heads" —  
"Circular Saws" — and full details of your  
Home Workshop Photo Prize —


Name.....

Address.....

My Dealer Is.....

## Comical Ash Trays for Bridge Fans

**T**HE accompanying designs for an amusing bridge table set were submitted by George Gordon, Jr., of the Congress High School, Bridgeport, Conn., in a contest conducted by the Educational Department of POPULAR SCIENCE

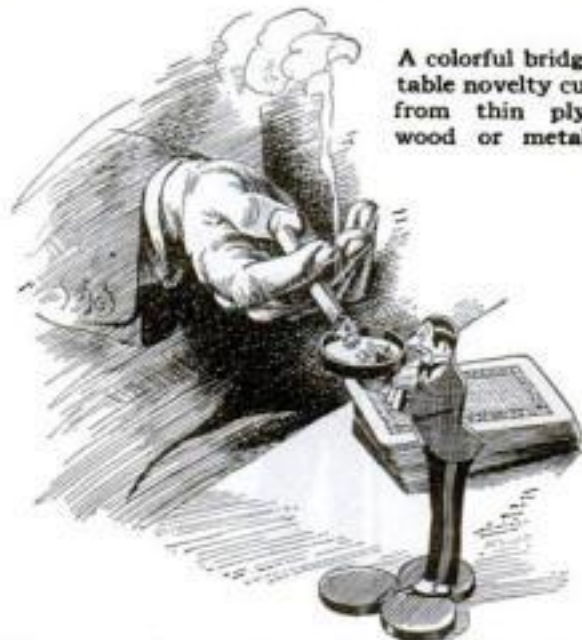


A colorful bridge table novelty cut from thin plywood or metal.

MONTHLY for teachers of shopwork. Mr. Gordon won first prize in the advanced metalworking division of the same contest with a design for andirons, which will be published in another issue.

The ash tray figures can be laid out in  $\frac{1}{4}$ - or  $\frac{1}{8}$ -in. plywood by enlarging the squares, and cut with a fret saw. The bases are similarly cut out in heart, club, and spade shapes.

To complete the set, Mr. Gordon made a fourth figure similar to the first but a

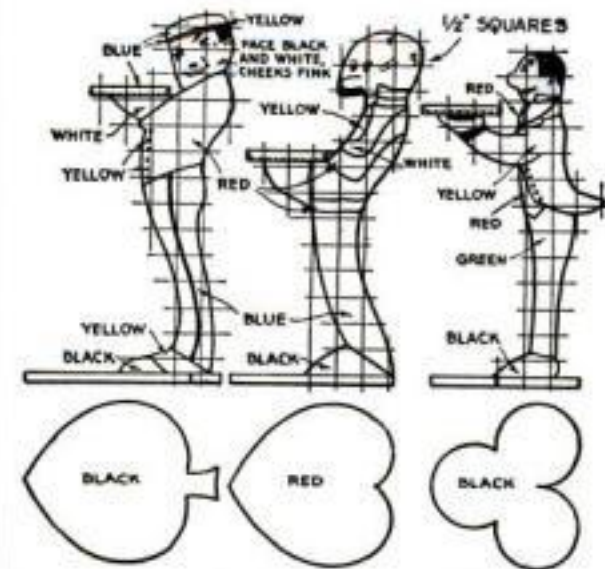

Three figures in the bridge set. The fourth, not shown, is only a shorter version of the first.

trifle shorter and placed it on a red diamond-shaped base.

Tin covers will serve for ash trays, or suitable trays may be purchased for a few cents each.

These novelties also can be made of  $\frac{1}{16}$ -in. sheet brass, in which form they have proved a successful project in advanced metalwork classes.

MUCH time may be saved in using steel stamps if a small notch is ground on the top side of each figure or letter to indicate when it is in the proper position for stamping.—R. M. KOCH.



# Mounting a Small Shop Motor



The motor slides along the lathe bed and can be used to drive any of the small bench machines.

IN MY home workshop I run several bench woodworking machines with one motor, as shown in the accompanying illustrations. The motor is mounted on a wooden sub-base, which slides on the lathe shears or bed and may be clamped solidly at any desired point. This system allows me to have almost any desired length between lathe centers, for turning, as both the tail- and the headstock are movable.

The diagram below is of the end of the bench with the motor belted to the saw. If the rotation of the motor is not readily reversible, the belt must be crossed.

The motor sub-base *B* is made of hardwood with the grain crosswise to the shears *J*. The guide *C* is screwed to *B*,

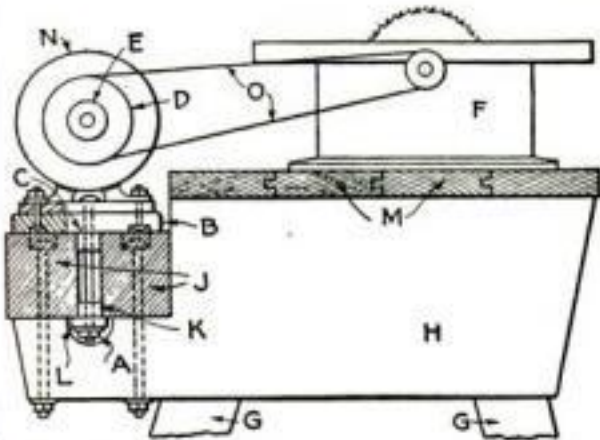



Diagram of end of bench showing the lathe shears with the sliding motor belted to a saw.

which can be clamped wherever necessary by the nut *A*. The other parts in this particular set-up are as follows: *D*, 4-in. flat face pulley; *E*, 2-in. grooved pulley; *F*, saw table; *G*, legs to floor; *H*, 2-in. thick hardwood framing; *K*, hardwood guide block; *L*, 1/2 by 2 in. iron of required length; *M*, 1 1/2 by 6 in. tongue-and-groove stock; *N*, motor; *O* belt to bench saw.—GEORGE W. ROYER.

Do NOT use sappy wood, under any circumstances, for repairs to outside woodwork. If moisture can get at it, such wood will rot in a very short time. Sound knots are not to be rejected, but be sure they form an integral part of the board.

# This FREE BOOK answers important questions

—  
this famous  
**PLEDGE**  
removes  
*risk* in  
buying  
a used car!

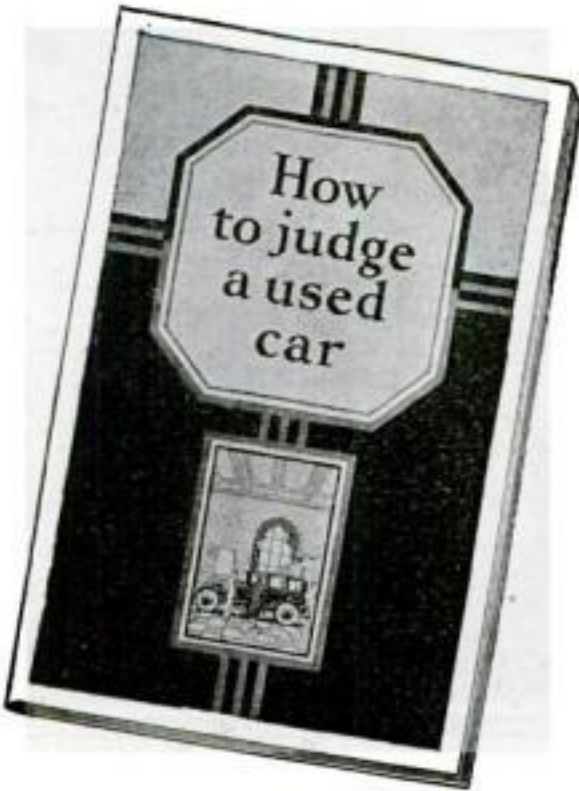

“How to Judge a Used Car”—written out of the experience of men who buy thousands of used cars for resale—shows you step by step how to pick a *good* used car at lower cost! Send the coupon now for your *free* copy.

This valuable free book explains how to judge a used car’s actual condition, how to learn the year model, how to set a fair price on a car offered you by a friend, what speedometer figures show; how to avoid “orphans,” what code prices mean—why you get five days’ driving trial, 30-day guarantee on certified cars and plainly marked prices under the terms of the famous Studebaker Pledge.

Read this free book, “How to Judge a Used Car.” It will bring all of this expert counsel to you without cost. Use the coupon below *now*!

## Pledge to the Public on Used Car Sales

- 1 Every used car is conspicuously marked with its lowest price in plain figures, and that price, just as the price of our new cars, is rigidly maintained.
- 2 All Studebaker automobiles which are sold as CERTIFIED CARS have been properly reconditioned, and carry a 30-day guarantee for replacement of defective parts and free service on adjustments.
- 3 Every purchaser of a used car may drive it for five days, and then, if not satisfied for any reason, turn it back and apply the money paid as a credit on the purchase of any other car in stock—new or used. (It is assumed that the car has not been damaged in the meantime.)

© 1928 The Studebaker Corporation of America

### MAIL THIS COUPON

THE STUDEBAKER CORPORATION OF AMERICA, Dept. 1610, South Bend, Ind.  
Send me free booklet, “How to Judge a Used Car”

Name.....  
Street.....  
City.....State.....

# STUDEBAKER

Builder of Champions








## Building the Wing for a Lockheed Model Plane

By VINCENT JOHNSTONE



**I**F YOU are building the flying scale model airplane described in the article "How to Build a Lockheed Model" published last month, your next step will be to construct the wing.

You will need the following materials: 3 pcs. balsa for wing ribs,  $\frac{1}{20}$  by 2 by 20 in.; 2 pcs. balsa for entering edge,  $\frac{1}{8}$  sq. by 20 in.; 1 pc. balsa for wing beam,  $\frac{1}{8}$  by  $\frac{1}{4}$  by 31 in.; 2 pcs. balsa for trailing edge,  $\frac{1}{16}$  by  $\frac{3}{16}$  by 20 in.; 2 ft.  $\frac{3}{32}$  in. diameter white German reed for wing tips; 2 pcs. of

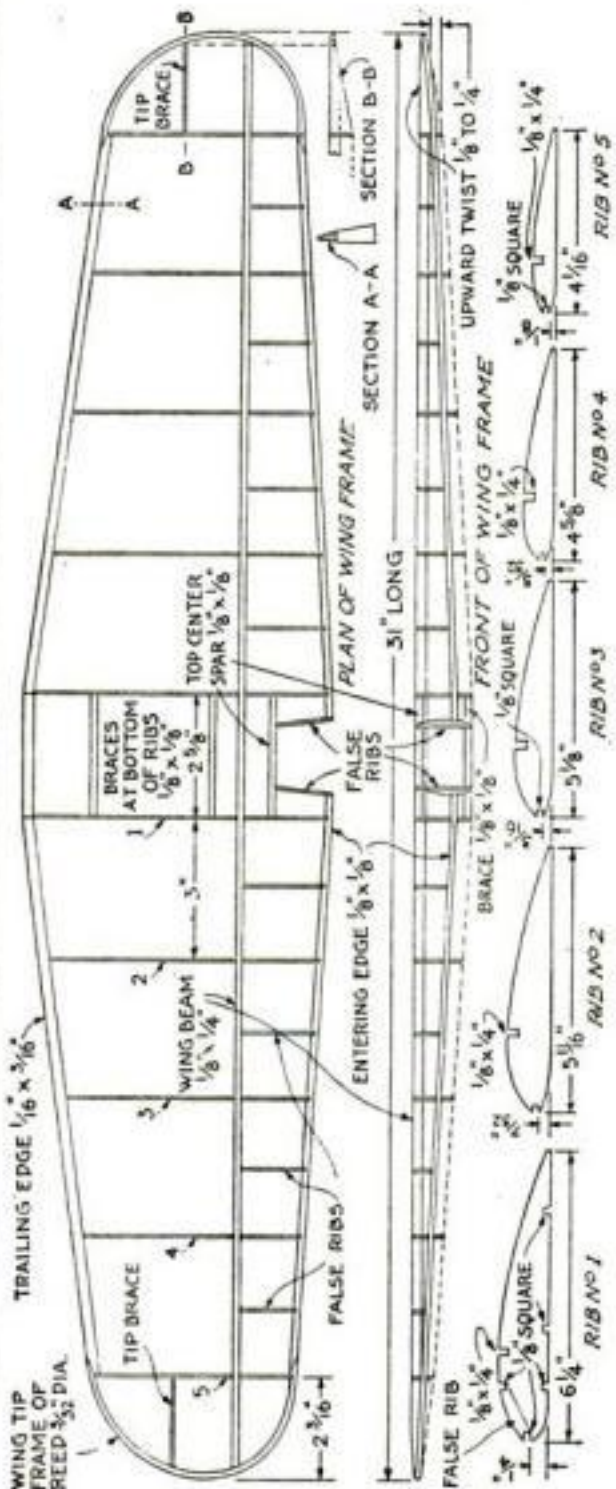

The wing framework. Lay out a full size plan and make templates for the various ribs.

# Alluring color makes NEW ... the old BATH and KITCHEN



"I am ashamed to have folks see our bathroom," a frequent assertion of housewives, is no longer heard in thousands of homes where the bath has been made a room rich in color, new in beauty, and smart in appearance through the use of UPSON FIBRE-TILE.

**T**IME and vogue decree a happy and colorful transformation of the bath and kitchen... so oft neglected.

With Upson Fibre-Tile and Upson Board, it is possible to make these drab, dreary rooms into rooms of joyous color that charm and satisfy...rooms that the most fastidious housewife will be proud to show her friends.

The cost is comparatively small. Any good carpenter, by following the simple directions furnished, can apply an Upson Fibre-Tile wainscot...with Upson Board upper walls and ceiling...easily, quickly and with little muss or dirt. Right over old plaster...or direct to studs in new construction.

### Upson Relief Ceilings—The Aristocrat of Ceilings

The New Upson Relief Ceilings have that attractive quality which in people is called "personality".

Their distinctive appearance and permanent

lasting quality support the assertion that they are the nearest-perfect ceilings. They give the beauty of expensive hand-modeled plaster at a fraction the cost. They can never crack or fall.

Two or more layers of Upson Decorative Strips are superimposed on the edges of Upson Board panels so that a design, with pleasing contrast of high light and shadow, is created. There are patterns suitable for any room, large or small.

Try Upsonizing one room. Then you will want Upson Board all through the house, as have tens of thousands of home owners all over the country.

The Upson Studio of Decoration and Color will gladly furnish directions for finishing, meeting your individual requirements, and which can be carried out by any good painter.

Both Upson Board and Upson Fibre-Tile excel in resistance to jars, blows, heat, cold, moisture...even ordinary leaks...as compared with needlessly heavy and brittle boards.

## UPSON FIBRE-TILE

THE UPSON COMPANY, 1027 Upson Point, Lockport, N. Y.

I want to know more about Upson FIBRE-TILE and Upson Board. Please send me samples and copies of your new booklets, "Characterful Walls and Ceilings," and "Upson Relief Ceilings," for which I enclose 10 cents.

Name \_\_\_\_\_

Address \_\_\_\_\_


We invite you  
to mail  
the coupon  
today



© 1929, The Upson Company, Lockport, New York



# Waco's NEW 1930 WONDER SHOP

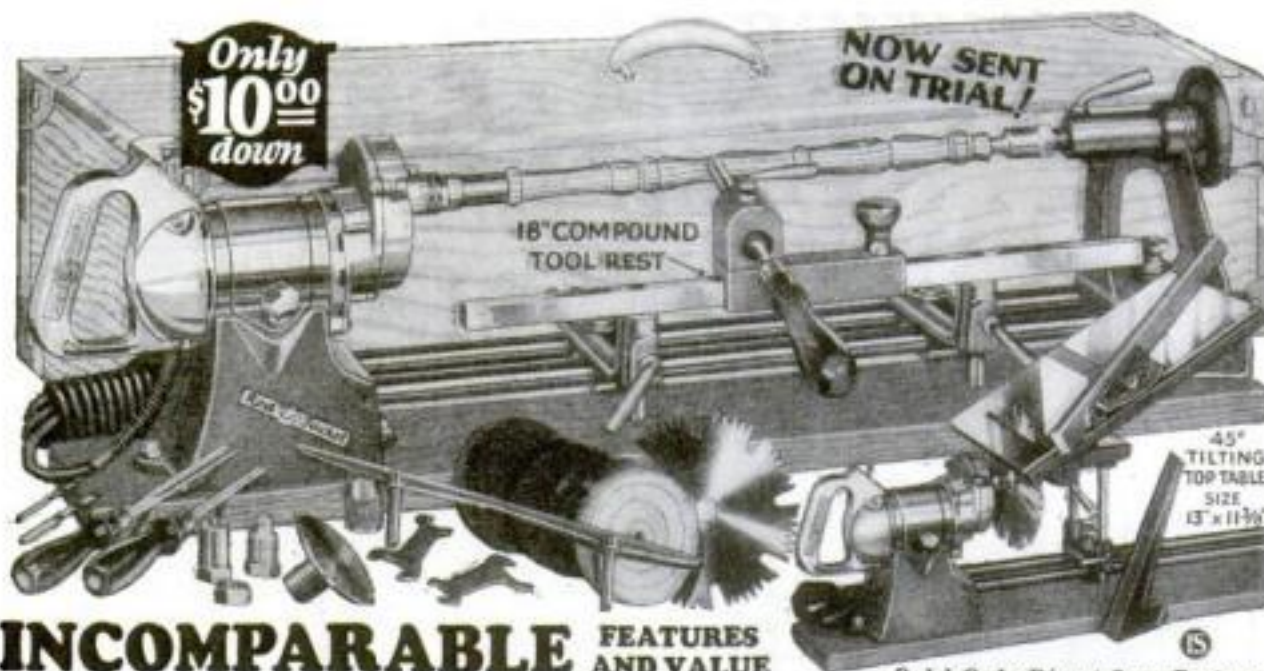

## INCOMPARABLE FEATURES AND VALUE



4 years of testing, experimenting and improvement is wrapped up in each new Red Jacket Home Work Shop. The finest tools and accessories that can be made go with each assembly order. Red Jacket equipment is designed, tested, approved and guaranteed by Wm. L. Aylward, a nationally known craftsman and manufacturer, who has developed his hobby into a co-operative association of thousands of craftsmen.

### Portable-Interchangeable-Complete RED JACKET HOME WORK SHOP

The new Red Jacket Combination of Electric tools brings you a Red Jacket Band Saw and in addition the powerful Red Jacket Master Drill Motor with direct drive to the Waco Craftsman's wood turning lathe (capacity 9" x 36"), also compound and 18" rests, a tilting top mitre saw with both depth and side gauges, scroll and jig saw, and all accessories for both portable and stationary power drilling, buffing, grinding and cleaning. Attaches to light socket and converts your work bench into a complete private tool and machine shop. It is a complete chest full of electrically driven tools designed for the private use of tool lovers and men who create, repair and appreciate handy tools at home.

### Make Things at Home Electrically

Send coupon at once for information valuable to those interested in beautiful handiwork. It is FREE. It tells you how easy it is to operate a Red Jacket set of tools and lists the advantages and privileges that are free to member craftsmen. Don't miss knowing all about Waco. You are invited. Look out for imitations. There is only one Red Jacket—use Waco—you will not find WACO TOOLS sold by retailers. All sales made direct from factory.

### Special Crafts Course FREE

SPECIAL CRAFTS COURSE and blueprint service is free to Red Jacket Shop owners—all there is to know about handcraft methods, raw materials, woods, carving, sawing, turning, designing, carpentering, decorating, is taught by special correspondence.

### Buy On Your Own Terms

Only \$10.00 down. Liberal discount for cash. Easy monthly payment plans. It is no hardship to own a Red Jacket.

45° Tilt Top Table

The FAMOUS WACO GUARANTEE  
If it is not what you want when you get it—send it back.

free BLUE PRINTS

Send the COUPON → Interesting Literature Free

Send the coupon. You will be surprised with all it contains. Beautiful, instructive, fascinating, interesting. Fill in and MAIL TODAY.

WACO TOOL WORKS, Inc.  
5216 W. Kinzie St. Chicago

Manager, Dept. 10. Please send me all free information and literature on Red Jacket Assemblies and FREE Services.

Name.....  
Address.....

### Make It Yourself!

Exclusive Features with WACO—

All Aluminum Master Drill Motor  
Perfect Tilting Saw Table 13 x 15 in.  
Patented Compound Tool Rest  
Finest Quality Hand Tools  
Unconditional Guarantee  
Unlimited Service  
—Read One Case of Business Ethics—  
Ask 7000 Happy Waco Owners





Loving Cup Won By Waco Grand Prize of America Master Craftsmen's Association.

superfine Japanese tissue 18 by 24 in. for covering the wing; one 2-oz. bottle of light dope.

It is advisable to lay out a full size plan of the wings and ribs. Using the actual size patterns of the ribs, cut out two of each size. Notch them very accurately for the wing beam and entering edges. A broken razor blade will be found handy for this work. Slip the ribs in place on the wing beam at their correct locations and fill around the joints with cement.

In order to counteract the torque of the propeller, the right wing tip must have a little more angle of attack to the air (known as angle of incidence) than the left wing tip, when viewed from the front. This is important. The trailing edge is sandpapered down to a triangular section with the knife edge to the rear. Install it on both sides of the wing by cementing

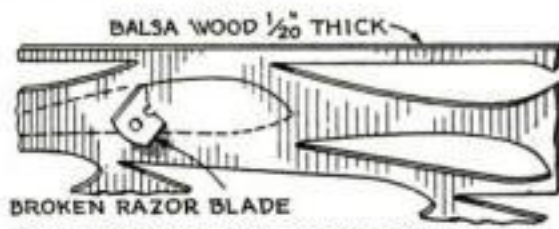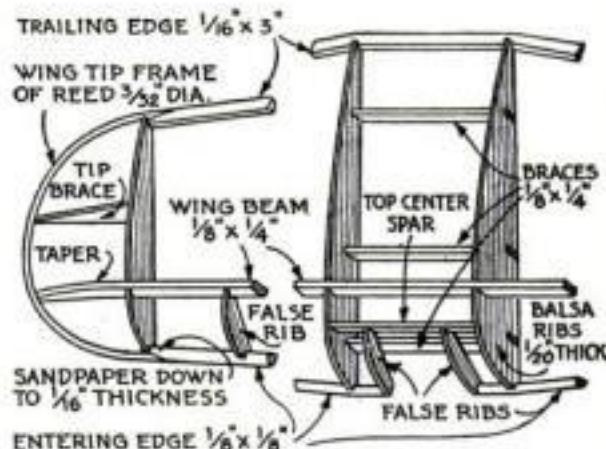

Details of the wing framework at tip and center; how the ribs are cut from balsa wood veneer, the grain, of course, running with the length.

it securely to the rear tips of the ribs. Very slightly round one half of the 1/8 in. sq. balsa entering edges. The entering and trailing edges should end at the outer rib.

Bend two wing tips from the 3/32 in. diameter reed. Leave the ends about 3/8 in. longer than necessary. Cut them at a slight angle for a lap joint and attach them to the wing tip with cement. The beam will have to be tapered equally from the top and bottom to make a support for the wing tip. In addition, the wing tip should also be supported by the riblike piece of balsa extending out from the end rib.

Install three 1/8 in. sq. braces in the bottom of the wing, just between the two center ribs for attaching the wing to the body. The wing in this condition should weigh somewhat less than 1/2 oz.

The appearance and efficiency of the wing can be improved by installing a short false rib between each of the full wing ribs, as shown. These false ribs prevent wrinkles from forming in the covering, and help to hold the wing curve to its proper shape for aerodynamic efficiency.

Now cover all the wing, except the bottom between the two center ribs and the top between the same ribs from the entering edge to the main wing beam. The top of the wing should be covered

## 25 POWER \$1 GERMAN POCKET MICROSCOPE

A marvelous German 25 power microscope, size of pen-2. Enlarges diameter 25 times, area 625 times. Fine lenses give extra large field and great light. Only 4 3/8 inches x 3/8 inch; weighs but one half ounce. Used in schools and colleges throughout the country. Fine for biology, geology, botany, nature study, examining stamps, finger prints, insects, cloth, metals, photographs and thousands of other things. Equipped with handy fountain pen clip.

\$1 prepaid. Money back guarantee. Discount for 6 or more. BINOCULARS Over 200 Glasses All Makes \$1-\$110

Everything in binoculars, field glasses, telescopes and optical instruments. The finest and largest assortment in America. Catalog gives all information how to choose the best for your individual needs at the LOWEST PRICE.

Try America's Leading Binocular House First DuMaurier Co., Dept. 310, Elmira, N. Y.



**OTTAWA LOG SAW**  
only \$39  
GREATEST OFFER EVER MADE  
Make Money! Wood is valuable. Saw 15 to 20 cords a day. Does more than 10 men. Ottawa easily operated by man or boy. Falls trees—saws limbs. Use 4-hp. engine for other work. 30 DAYS TRIAL. Write today for FREE book. Shipped from factory or nearest of 4 branch houses.  
OTTAWA MFG. CO., 1801-W Wood Street, Ottawa, Kansas

## How to set up a "POWER" WORKSHOP

This book contains valuable information for those interested in learning how to get the most out of power (electric) tools, either for home workshop use or small shop operations.

It tells in simple terms the best method of setting up a home workshop.

Chapters on the use of a wood turning lathe. Use of the dado and circular saw. Operating the jig saw, jointer, belt sander, etc. Wood joints and how to make them, illustrated. Different glues and their uses. Uses for the flexible shaft illustrated. Also eight blueprints with specifications and bill of materials of useful furniture easy to make.

### "THE DRIVER MANUAL"

By the Manufacturers of "DRIVER" Power Tools

Walker-Turner Co., Inc., 70 York St., Jersey City, N. J.

NAME.....  
STREET.....  
TOWN.....






between the two center ribs from the wing beam to the rear edge.

Apply a light dope and hold the wing with a slight twist by depressing the left entering edge and raising the right entering edge when viewed from the front. When the light dope dries, there should be an incidence in the right wing tip, when viewed from the front, of from  $\frac{1}{8}$  to  $\frac{1}{4}$  in. This will depend upon the amount of rubber used to fly your model.

Attach the wing to the body by securely cementing the square crosspieces on the bottom—those between the two center ribs—to the flattened portion of the hollow balsa fuselage.

Make two extra false ribs to the pattern of the front part of the largest rib, as illustrated. Use these as a starting point and build around them a neat little pilot's inclosure, which can be covered with thin

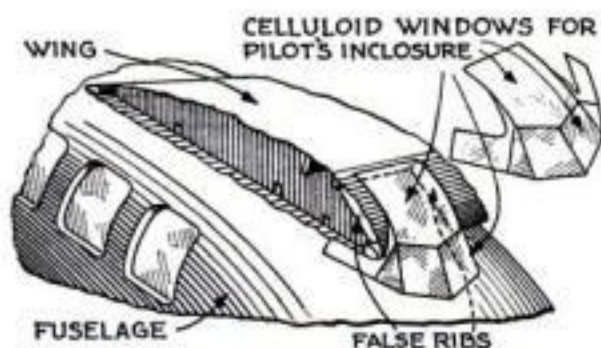

Broken-away view of the wing on the fuselage, to show how the pilot's inclosure is constructed.

celluloid or a cellophane type candy wrapping. Cover the underside of the wing between the two center ribs and the body, as well as the small spaces between the two center ribs and the two false ribs for the pilot's inclosure. Dope them with light dope.

If you wish to make the model a realistic copy of the famous *Yankee Doodle* plane, which was blue and white, paint it as shown on page 123.

If you have made the fin and the elevator at the rear of the fuselage and the fuselage itself as light as instructed, you will find that the propeller, the dummy motor, the landing gear, and the heavier front part of the fuselage will cause the machine to balance at a point between the entering edge and the wing beam.

You are now ready to give your model a trial glide and flight. In flying trim with about eight strands of rubber for a trial, the model should glide rather steeply when unwound.

When launched gently at about the flying speed with its nose pointed slightly downward, the tail of the model may drop; then the machine stalls and falls quickly. In this case you will have to add a little weight to the nose or bend down the elevator slightly.

If in these trial glides the model noses over steeply without apparently recovering or stalling first and lands on its nose, repair any damage with a little cement and raise the rear edge of the elevator slightly. If the model dives to the left in a circle, the inner wing tip on the wing which is low in the glide should be warped up considerably and held in this position until set permanently.

Note: To make an inch scale for measuring dimensions on the body drawing (page 81, September issue), draw a line  $2\frac{1}{16}$  in. long and divide into ten equal parts.

## FREE!

A whole week's better shaves. Just mail the coupon below.



# How to feel Clean-Shaven Longer!

Now a closer shave because of extra efficiency of small-bubble lather.

**M**EN who use Colgate's do not worry around five o'clock as to whether to shave again . . . or to try and "get by." Such men know the superiority of Colgate's small-bubble lather—that it gives a longer-lasting shave—one that makes you feel comfortable and clean-faced. Colgate's small-bubble lather, as its users know, is vastly different, quickly moistening the beard at the base, as big bubbles can't.

## Just Plain Reasoning

The minute you lather up with Colgate's small-bubble lather, two things happen: 1. The soap in the lather breaks up the oil film that covers each hair. 2. Billions of tiny, moisture-laden bubbles seep down through your beard . . . crowd around each whisker—soak it soft with water.

Instantly your beard gets moist . . . easier to cut . . . scientifically softened right down at the base.



COLGATE LATHER

Colgate's lather (greatly magnified) showing moisture contact with beard and minimum air. A common-sense principle scientifically authenticated and proved out practically by millions of men.



ORDINARY LATHER

Ordinary, big-bubble lather (greatly magnified). Note air-filled bubbles which can't soften the beard efficiently. Only water can do the job. Only small bubbles permit sufficient water.



COLGATE, Dept. B-1773 P.O. Box 375 Grand Central Post Office, New York City.

Please send me, FREE, the seven-day trial tube of Colgate's Rapid Shave Cream; also a sample bottle of "After-Shave."

Name.....

Address.....



# Here it is! The Complete Handbook for Everyone who wants to Get into Aviation

Now, for the first time, the whole subject of aviation is covered thoroughly in one profusely illustrated handbook—an encyclopedia of flying—a complete exposition of planes, their construction, equipment, and operation, presented simply and clearly for the beginner. If you want to get in **START NOW**—This is the day of golden opportunity. If you want to succeed **START RIGHT**—by equipping yourself with *The Indispensable Guide Book for Everyone Who Wants to Fly*.

## The AVIATION MANUAL

Over 600 pages, 150 illustrations including diagrams, drawings, and photographs. Flexible Bound in Handbook style—gilt edged.

### A Complete Ground Course for Beginners In a Single Handy Volume

"How can I get into aviation?" many men are asking. "And what must I know before I can take flying lessons?" This great new book is the answer to both questions. In a clear, thorough, and practical way it completely explains all of the things the beginner must become familiar with—it offers the background needed by the man who wants to fly—it presents the knowledge he must have of planes, motors, and instruments; of the theory and practice of flight; of license regulations, air traffic rules, and the requirements of commercial aviation. And it is all presented clearly in non-technical language with a wealth of photographs, diagrams, and tables.

### 24 Carefully Graded Chapters on Airplane Construction, Equipment, and Control

- |   |  |
|---|--|
| Chapter 1. Opportunities in Aviation                      | Chapter 12. Power Plants                   |
| Chapter 2. The Business of Flying                         | Chapter 13. The Manufacture of Engines     |
| Chapter 3. License Requirements                           | Chapter 14. Instruments                    |
| Chapter 4. Qualifications for Flying                      | Chapter 15. Elementary Airplane Design     |
| Chapter 5. Training to Be an Aviator                      | Chapter 16. Materials and Their Properties |
| Chapter 6. Your Background of Knowledge                   | Chapter 17. Wings and "Props"              |
| Chapter 7. Aviation Schools and Flying Clubs              | Chapter 18. Wind and Weather               |
| Chapter 8. How to Get the Most Out of a Flying Course     | Chapter 19. How a Pilot Inspects His Plane |
| Chapter 9. Your First Outfit                              | Chapter 20. Learning to Fly                |
| Chapter 10. Standard Airplanes, Seaplanes, and Amphibians | Chapter 21. Advanced Flying                |
| Chapter 11. The Construction of Planes                    | Chapter 22. Laying an Air Course           |
|   | Chapter 23. Air Traffic                    |
|   | Chapter 24. The Laws of Aviation           |

### Prepares You for Flying Lessons

Here's just the book you have been waiting for—the easy-to-follow guide that will introduce you to every phase of aviation—the complete handbook that will answer all your questions about flying—the one volume that will give you the best start on the road to success—an entire beginner's course in a single volume that will save you time and money and make your advanced work quicker and easier for you. Whether you look forward to being a pilot, a mechanic, a radio operator, a photographer, a salesman, or an expert in any other branch of aviation **THE AVIATION MANUAL** will start you **RIGHT** and guide you to the big opportunities in this rapidly growing field for air-minded men.

### FREE EXAMINATION Low Special Price NOW

We want you to take no risk and to run no chance of being disappointed. Therefore we offer to send the book to you for ten days' examination. Within that period you may return it and owe nothing. Our unusual manufacturing facilities together with the large

edition it is possible to make of a book in such great demand, enable us to place the amazingly low price of \$5.00 on this book. And you may own it **FOR EVEN LESS THAN THIS**. For we are offering for a short time only a 10% advance of publication discount which brings the price down to \$4.50, if you act at once. If you wish to take advantage of the special price send the coupon at once. **NO MONEY IS REQUIRED** until you have seen the book itself.

#### ORDER ON THIS COUPON


Popular Science Publishing Co.,  
381 Fourth Ave., New York.

Please send me upon publication a copy of *The Aviation Manual*. Within ten days of receipt I will either return the book or remit \$4.50—the special advance price.

Name.....  
Address.....  
City & State.....

POPULAR SCIENCE  
PUBLISHING CO.

381 FOURTH AVE. NEW YORK

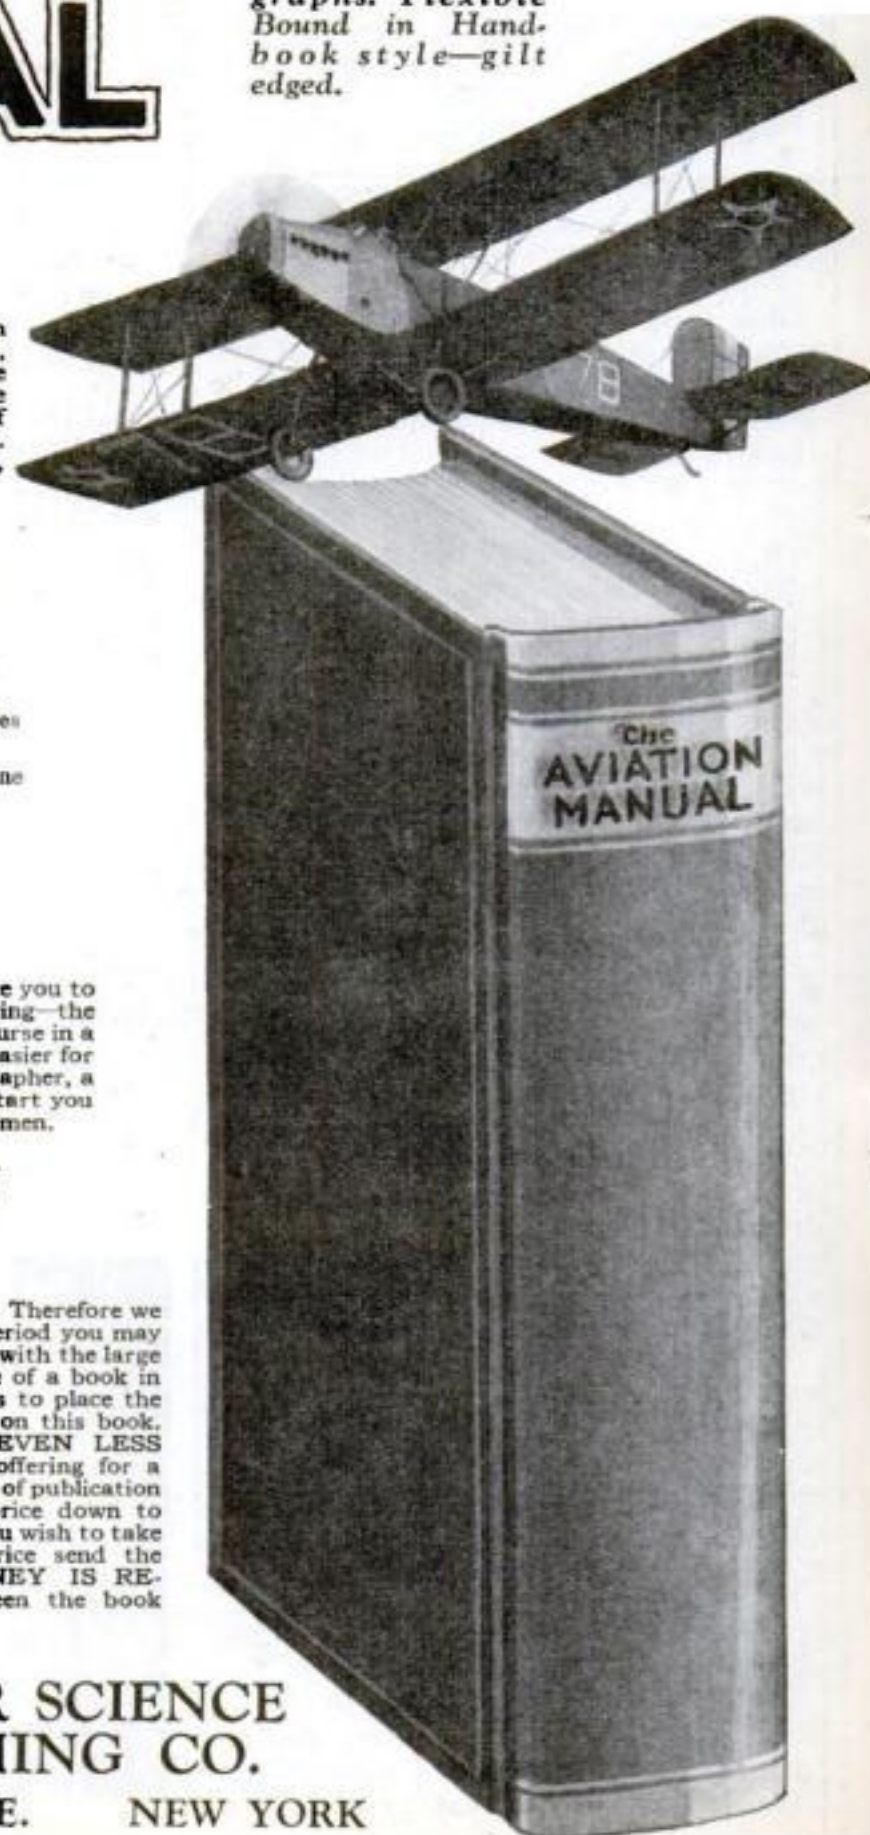



## Roll Roofing Transforms an Ugly Garage

IN ONE corner of a recently acquired suburban property was a shed that was spoken of as a garage. Its walls were of unpainted rough clapboarding, there was no trim around the windows and doors, and the lean-to tool shed was built of boards that had once formed a real estate sign.

The new owner took immediate steps to make it more presentable. As he did not want to go to the expense of shingling



Although an eyesore, this hastily built garage was too useful to be torn down.

it, he solved the problem by covering it with roll roofing surfaced with crushed green slate. The roofing, cut into lengths reaching from ground to eaves, was nailed at the edges, and the joints were covered with strips of wood  $\frac{1}{2}$  by 2 in. All bulging was prevented by placing horizontal strips in the centers of the panels.

Strips of the same size formed the trim around the doors and windows. It would



The same garage after being covered with roll roofing and trimmed with strips of wood.


have been a tedious and painstaking job to paint the strips after they were nailed on, and time and effort were saved by painting them beforehand—three coats on the edges, and two on the flat surfaces, which received a third when in place to protect the nailheads.

Aside from the preliminary painting of the strips, the work was done in one day. The cost of the materials was twenty dollars.—R. B. W.

AT CERTAIN seasons of the year, moisture condenses on cement, stone, and brick floors and accumulates under any mats or rugs. A simple way to keep the mats from becoming moldy is to place sheets of waxed sandwich paper under them. These can be obtained almost anywhere, cost little, and are readily changed or removed.—A. E.

A new method of making decorative leather articles will be described by F. Clarke Hughes in the November issue.

# "Blind Man's Buff" made a lot of MISTAKES!

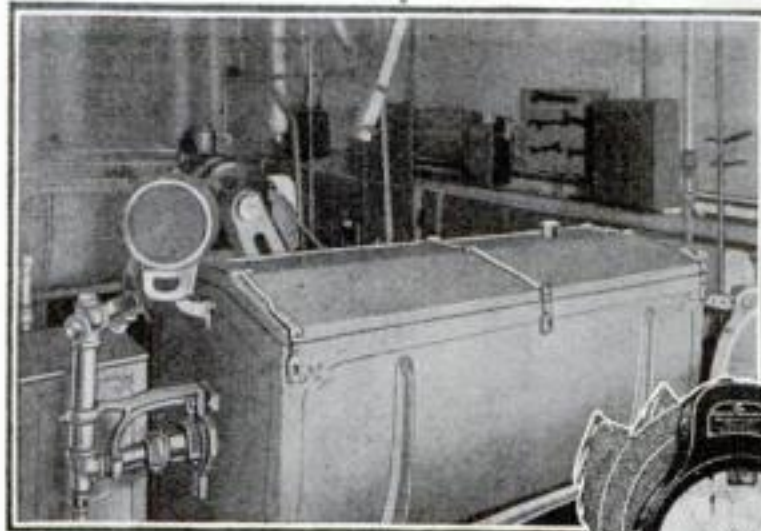

"Up until about a year ago we had been having almost continuous trouble, expense and waste—If it wasn't one thing it was another until we decided to put in regulators."

Says — Superintendent of one of the largest Carton plants in the U. S. A.

## Tycos The Sixth Sense of Industry INSTRUMENTS

Tycos Instruments were put in this carton manufacturing plant even though their initial cost was greater than others on the market, because the process of controlling paraffine wax temperature is the basis of the manufacturing process—the temperature must be maintained within very close limits—and they have more than justified the cost.

### TO MANUFACTURERS

If your process is annealing—baking—steam cooking—boiler regulation—vulcanizing—anywhere that temperature control is a factor—Tycos instruments are made to do that very job—They are the watchmen on the job to many manufacturing processes where heat treating is a factor.

Informative literature will be sent on any type of instrument on request or—

Our engineers will consult with you on the application of Tycos to your particular problem.

### Taylor Instrument Companies

Main Office and Factory

ROCHESTER, N. Y. . . . U. S. A.

Canadian Plant: Tycos BUILDING, TORONTO  
SHORT & MASON, Ltd.

Manufacturing Distributors in Great Britain

## Tycos for the Home

### Tycos Office Thermometers

An aid in promoting human efficiency.

### Tycos Bath Thermometers

### Tycos Home Set

Bake Oven Thermometer, Candy Thermometer, Sugar Meter. The secret of accurate results in cooking.

### Tycos Wall Thermometers

To help you to maintain a temperature in your house conducive to good health.

### Tycos Quality Compasses

### Tycos Fever Thermometers

### Tycos Stormguide

Forecasts the weather twenty-four hours ahead with dependable accuracy.

### Tycos Hygrometer

To enable you to keep the humidity of the atmosphere in your home correct at all times.

## Tycos for the Medical Profession

Tycos Sphygmomanometer, Recording Pocket and Office types.

Tycos Fever Thermometers.

## Tycos in Aviation

A full line of Aviation Instruments for ships and airports.

Your dealer will show them to you. Ask us, on a postal, for booklets on any of the above.

Bulletins on request



THE ~ SIXTH ~ SENSE ~ OF ~ INDUSTRY  
**Tycos Temperature Instruments**  
INDICATING • RECORDING • CONTROLLING





## Where's the can of PLASTIC WOOD?

Reg. U. S. Pat. Off.

Baseboard cracks and floor cracks—not only eyesores, but gathering places for dust and dirt. The baseboard cracks are drafty, too—why not fill them up with Plastic Wood. Your home looks better if it's ship-shape—and it is healthier as well. For cracks and holes, loose handles and loose casters, damaged furniture and woodwork, splinters, broken mouldings use Plastic Wood—it handles like putty, hardens into wood, adheres lastingly, and takes paint, varnish, and lacquer perfectly.

# PLASTIC WOOD

[Reg. U. S. Pat. Off.]

Plastic Wood is extensively used by automobile body repair shops. It makes an ideal filling for dents to fenders or in the body, and permits many repairs to roof tops, rails, and bows that formerly required new parts. It is waterproof and weatherproof, and stands the hardest kind of wear. A folder "Plastic Wood for Automobile Body Repairs" sent free on request.

### Plastic Wood Solvent

To thin or soften Plastic Wood, and to remove it from hands or tools, use Plastic Wood Solvent. At dealers, in 25 and 50 cent cans.

Handles  
like  
Putty



Hardens  
into  
Wood

1 lb. can  
\$1.00


¼ lb. can  
35 cts.

At Hardware and Paint Stores  
ADDISON-LESLIE COMPANY  
320 Bolivar Street Canton, Mass.

## These Book Ends Will Not Slip

ORDINARY book ends or blocks, no matter how heavy, are likely to spread apart when a number of volumes are placed between them. The book holder illustrated, however, will not slip, because of a locking effect obtained by means of two dovetailed slides.


This ingenious method was used by G. A. Buck, of Roanoke, Va., in making a

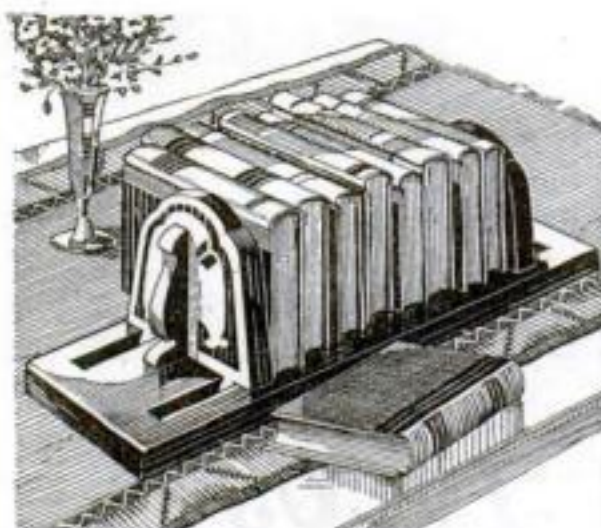

The end supports have dovetail-shaped feet which lock automatically in the long grooves.

book holder of black walnut for a set of books which he desired to hold in perfect shape on his desk. As he is an expert craftsman, he followed a design which would be too difficult for the average amateur. The simplified design shown was prepared by William H. Varnum, Associate Professor of Applied Arts, University of Wisconsin, and it can either be left perfectly plain or ornamented with inlaid or colored designs such as those suggested below at A and B.

While it would appear to be difficult to make the dovetail slides, Mr. Buck used a simple method, requiring only a hand

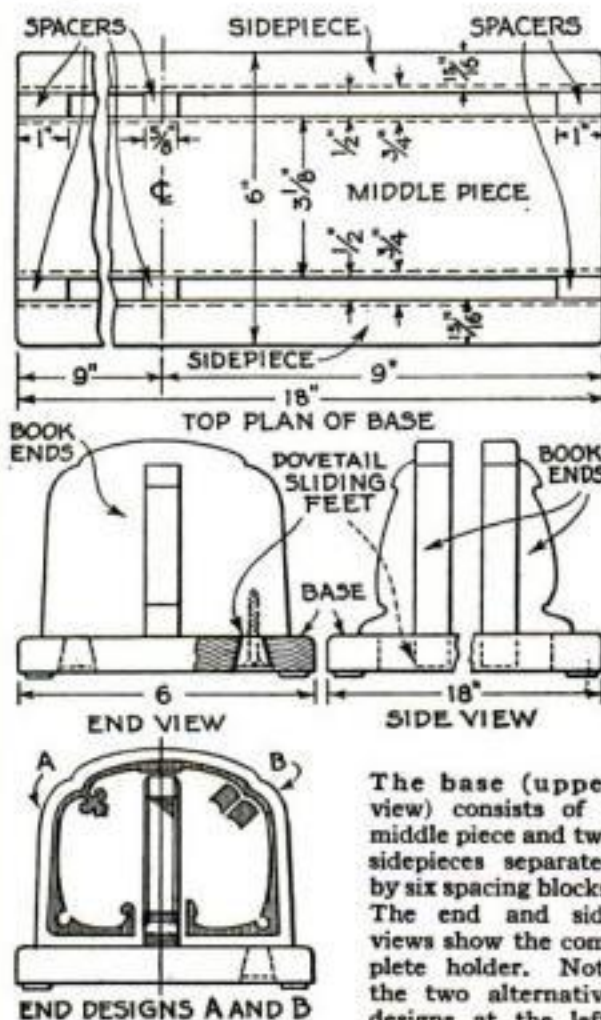

The base (upper view) consists of a middle piece and two sidepieces separated by six spacing blocks. The end and side views show the complete holder. Note the two alternative designs at the left

# NIGHTS OF JOY IN STORE FOR you!

Free Lessons!



## START TO PLAY VERY FIRST DAY

Even if you can't read a note of music right now, you play a simple melody on the very day you get your Deagan Xylorimba. Free, easy lessons show you how. Soon you are amazing friends and relatives. Then a new life begins—long, happy evenings of joy; parties; popularity; radio engagements—and the same chance to make \$5 to \$25 a night as Ralph Smith, Chicago—"Played 20 minutes at wedding; received \$20." Or the Hallmann family, Reading, Pa.—"Made \$300 in 5 weeks, spare time."

**FIVE DAYS' FREE TRIAL**—Our big FREE book tells all about this fascinating instrument—the 5-day free trial offer—the free lessons—the easy payment plan. Send in the coupon today—the booklet will be mailed promptly without cost or obligation.

**MAIL COUPON TODAY!**

J. C. Deagan, Inc., Dept. 1557 1770 Berteau Ave., Chicago  
Send me, without obligation, full details of Free Trial offer and easy-payment plan on the Deagan Xylorimba.

Name \_\_\_\_\_

Address \_\_\_\_\_

## YOUR EXERCISER - QUICKLY BUILT - AT LITTLE COST!

Build your own Exerciser and Reducer. The **SCIENTIFIC EXERCISER KIT**—costs only \$12.00—comes to you complete except for motor—with simple instructions showing exactly how to assemble it. Takes less than one-half hour—offers all the benefits of highest priced machine—at a fraction of their cost—4 strokes—2 speeds. Send no money—three days free trial. Order by post card—today! Delivered anywhere in U. S., parcel post, prepaid, C. O. D., for \$12.00.



Money Back Guarantee.  
SCIENTIFIC ELECTRIC  
WORKS

90 G BROOKLINE AVE.,  
BOSTON, MASS.

Only  
\$12.00

TAKES ONLY ½ HOUR TO ASSEMBLE

## FACTORY PRICES!

21 JEWEL—Thin Model  
**STUDEBAKER**  
The Insured Watch

The only high-grade watch sold direct from factory! Let us send you one of these superb 21-Jewel Studenaker watches direct from factory. No obligation. If you like it and believe our low factory prices save you money—keep it. Pay for it in easy monthly payments or cash.

**FREE—6-Color Book**

To those who write immediately we will mail a beautiful 6-color style book showing complete line of Studenaker watches—all at factory prices. Write for it TODAY!

**WRITE!**

Handsome strap and bracelet watches in newest styles—at big savings. Write for FREE style book at once!

**STUDEBAKER  
WATCH COMPANY**

Directed by the Studenaker Family—known three-quarters of a century for fair dealing

Dept. NU104 South Bend, Indiana  
Canadian Address: Windsor, Ont.





plane and an ordinary marking gage.

First, he dressed a piece  $3\frac{1}{8}$  in. wide and 18 in. long for the middle part of the baseboard. Then he prepared a strip  $\frac{3}{4}$  in. wide and 12 in. long and planed both edges of the strip to the same taper as the edges of the middle piece. This was cut into ten pieces, six of which were used as spacers between the middle section and the outside strips of the base, and four of which were later glued and screwed to the end pieces to form the dovetailed feet which slide back and forth in the grooves.


The middle piece and the six spacers were placed on a level surface with tissue paper underneath to prevent the glue from sticking to the bench, and were glued together. No nails were used.

The outside strips next were prepared with a taper on one side only; these were fitted against the spacers and glued.

Before the four dovetailed feet were attached to the end pieces, a fraction was planed from them so that they would fit the grooves nicely. A small hole was drilled through each of the pieces for small screws. Then the ends were placed square with the edges of the base and the feet were inserted in the slots from the bottom, glued, and allowed to dry. Finally the screws were driven in flush.

### Releasing Bombs from a Model Airplane

**B**OMBS and parachutes can be dropped from a model airplane by means of the simple releasing device illustrated. When the propeller shaft turns, it pulls

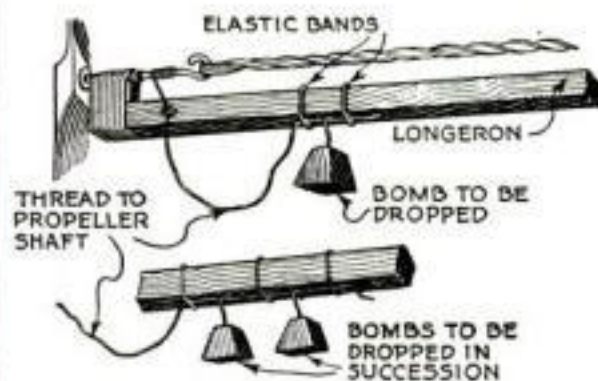


As the propeller shaft revolves, the thread is wound up and releases the bomb or bombs.

the thread through the rubber band and allows the bomb or parachute to drop. Several can be dropped in succession, if desired.—JAMES J. DOYLE, JR.

### Pulling Electric Plugs

**T**O DISCONNECT an electric appliance by grasping the cord near the point where it is connected to the plug will soon loosen the connections. It is better to fasten a loop of strong string, such as chalk line, to the plug on the inside.

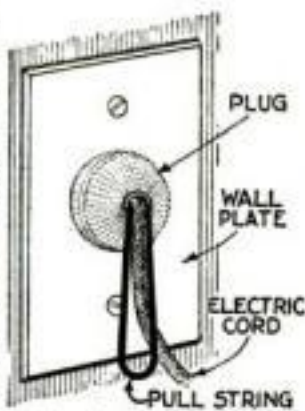

The loop is pulled instead of the cord.

TIGHT unions, ells, tees, and the like may be loosened by heating them with a blowtorch and applying kerosene or lard oil to the threads.

"JUST NOTICE THE FINE SKINS OF MEN WHO USE WILLIAMS"



## FACES—and WILLIAMS

For millions of faces, Williams begins the day!

¶ Men choose Williams Shaving Cream who want the proven things. Blended from 89 years of highly specialized study. Uncolored. Cool as morning. Mild as cream.

¶ Saturated with beard softening moisture, too, is this Williams lather. Ten per cent more of it, by authentic test, than in any other we know of.

¶ Williams—for the exacting man—the sensitive skin—the tough beard! For *any* water—weather—razor! No shaving experience is complete until Williams has been tried.

¶ "Oh, yes," the drug clerk says, "sometimes they change . . . but they all come back to Williams!"

THE J. B. WILLIAMS COMPANY, GLASTONBURY, CONN. MONTREAL, CANADA.

*Next time say*

**Williams Shaving Cream**  
*please!*

Then a dash of AQUA VELVA. Gives proper care to the newly shaven skin.



# Screw Cutting PRECISION LATHE

SIZE 9"x3" ONLY

\$169



## New Model SOUTH BEND

Junior Back Geared Screw Cutting Bench Lathe (size 9"x3") complete with Countershaft and Equipment shown.



for the Manufacturing Plant, Tool Room, General Repair Shop, Machine Shop, Service Station, Electric Shop, Engineering Shop, Maintenance Airport, Flying School and Laboratory.

### All on Easy Payments

We ship any South Bend Lathe immediately upon receipt of only 20 per cent of Catalog price. Balance in 12 equal monthly payments. Write for Time Payment Catalog.

### Free Catalog Shows All Sizes from 9 in. to 18 in.

Countershaft Driven Lathes, Motor Driven Lathes, Quick Change Gear Lathes, Standard Change Gear Lathes, Tool Room Lathes, Gap Bed Lathes, Brake Drum Lathes and Bench Lathes.

### Prices of Popular Sizes of Quick Change Gear Lathes with Equipment

Size of Lathe	Shipping Weight	Countershaft Drive	Silent Chain Motor Drive
9" x 3'	490 lbs.	\$294.00	\$398.00
11" x 4'	725 lbs.	359.00	498.00
13" x 5'	1110 lbs.	443.00	602.00
15" x 6'	1550 lbs.	513.00	720.00
16" x 8'	2035 lbs.	638.00	817.00

WRITE FOR FREE CATALOG

South Bend Lathe Works 827 East Madison Street South Bend, Ind., U.S.A.  
Lathe Builders for 23 years—45,000 users

96 Types and Sizes

South Bend LATHES

CATALOG No. 90-A

SOUTH BEND LATHE WORKS, Ind., U.S.A.  
827 E. Madison St. South Bend, Ind. ( ) Time Payment Catalog.  
Name Address City State

## PARKS

WOODWORKING MACHINES  
Guaranteed ten years

Cabinet Shop Special No. 10 \$290 with Motor



You ought to have this handy Parks in your shop. Compact, complete machine designed like a big production outfit at 1/5 the cost. Floor space required only 42x72 inches. Does any kind of cabinet or joinery work. Write for circular.


The Parks Woodworking Machine Co.  
1547 Knowlton St., Cincinnati, Ohio  
Canadian Factory: 338 Notre Dame East, Montreal

## WITTE ENGINES

The famous line of WITTE Engines are now sold by established dealers throughout the country. 300,000 already in use the world over. 2 to 30 H.P. Wico Magneto equipped. A lifetime guarantee with every engine. Ideal for the home, farm, shop or mill. The cheapest reliable power available. Catalog Free, on request. If your dealer cannot supply you, write us.



WITTE ENGINE WORKS  
KANSAS CITY, MO.  
ENGINE BUILDERS SINCE 1870

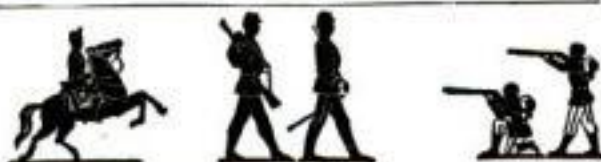

FORMS TO CAST LEAD SOLDIERS, INDIANS, TRAPPERS, Hunters, Wild and Farm Animals. 222 Wonderful "True to Life" models. Easy and inexpensive to make. I furnish all necessary material. Send 5c Stamp for Illustrated Catalogue.

Henry C. Schiercke, 1034-72nd St., Brooklyn, N. Y.




## AIRPLANE

12-inch scale model of Lindbergh's Spirit of St. Louis. Scientifically designed and very realistic. Runs from ground by own power and flies 40 ft. or more. Stays in air 8 to 10 seconds. Easily built in 3 hours. No tools needed. Construction

set, with all parts and full directions, postpaid in U.S., only 50c. (No stamps.) Satisfaction or money back. Send today. MANN & BENTON Box E Chillicothe, Ohio

## Build It With a Boice Workshop!

No matter what you want to build of wood, Boice-Crane can help you. He'll send you this heavy-duty Saw-Jointer-and-Lathe motorized workshop on easy monthly payments with an ironclad guarantee of satisfaction or money back.

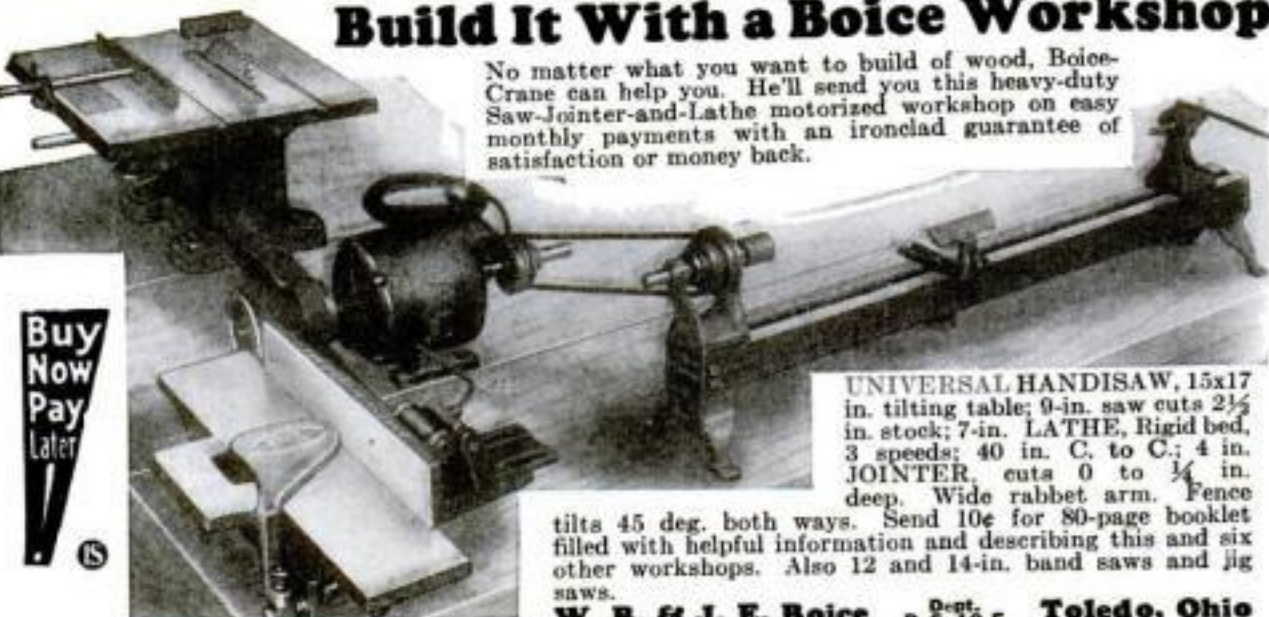

UNIVERSAL HANDISAW, 15x17 in. tilting table; 9-in. saw cuts 2 1/2 in. stock; 7-in. LATHE, Rigid bed, 3 speeds; 40 in. C. to C.; 4 in. JOINTER, cuts 0 to 1/4 in. deep. Wide rabbet arm. Fence

tilts 45 deg. both ways. Send 10c for 80-page booklet filled with helpful information and describing this and six other workshops. Also 12 and 14-in. band saws and jig saws.

W. B. & J. E. Boice P.O. Box 10-E Toledo, Ohio

Buy Now Pay Later

## Finger Grip Improves Paint-Pot Hook

IF YOU make two paint-pot hooks of the type illustrated, you can ascend a ladder with two buckets of paint and two or three brushes and still place the hooks without difficulty over a rung wherever you desire.


To use the hook, place your fingers, in the ring made for that purpose, drop the paint pot between the rungs, and catch the hook on the rung above. If you prefer, you can even hook the



Suspending the pot from a window sill.

wire over the rung with the paint pot hanging on the outside of the ladder.

In making one of the hooks, squeeze the crook together so that it will snap over the bail of the paint pot; then it will not easily become unhooked. File the other end



Two ways in which the pot can be hung.


slanting with a long beveled point on the near side, so that the hook can be set on top of a porch railing, or even on a slanting window sill, without its slipping.

—LOYAL R. JONES.

## Innocent Looking Spool Rolls Erratically

WHEN given a slight push on a smooth table or floor, the trick spool illustrated will perform unexpected spins and turns, but if rolled hard, it will go in a relatively straight line.

To make the toy, a section of curtain pole about 1 3/8 in. in diameter and 2 1/2

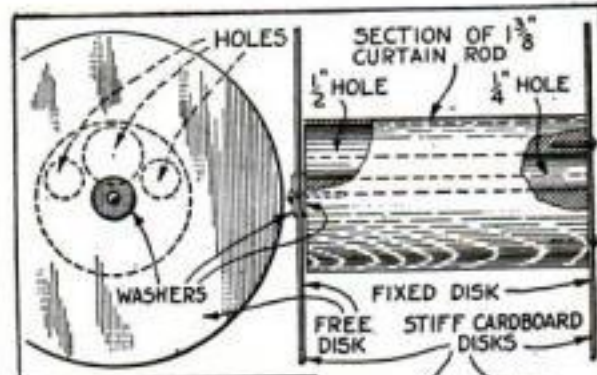

Because of the holes bored lengthwise through the wooden core, the spool performs unexpected spins and turns when it is rolled gently.



in. long and two stiff cardboard disks about 3 in. in diameter are required. The wooden core is prepared by drilling one 1/2-in. and two 1/4-in. holes through it lengthwise in the locations shown. One disk is tacked permanently to one end of the core, while the other is attached so that it will turn freely, with a washer on each side.—DONALD W. CLARK.




## Simple Way to Make Small Ship Models

By LIEUT. A. R. McCracken, U. S. N.

**S**MALL and medium sized ship models may be simplified by making the hull in two parts. The work is more convenient to handle and the rigging is made taut without tying knots in inaccessible places.

In making a 10-in. model of the *Constitution*, two pieces of wood were selected for the hull, each large enough to take the deck plan of the model. One was a little thicker than the depth of the hull above the water line, and the other a little thicker than the depth below the water line. Dowels were inserted tightly enough to hold the blocks firmly together yet allow them to be pulled apart later.

The hull was carved and sandpapered in the usual way, the blocks pulled apart, and the dowels removed. Deck fittings and other details were built up, holes for

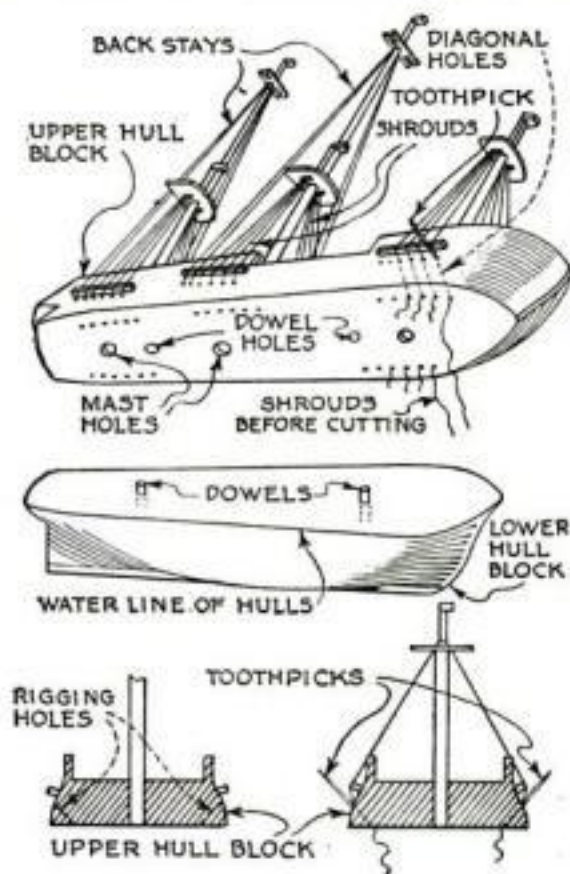

Small model divided along the water line to lessen the work of painting and rigging it.

masts drilled completely through the upper block, and the two halves of the hull painted separately, making a clean-cut water line.

At the points in the sides of the upper half of the hull where the shrouds and backstays would be normally attached, holes of a size a little larger than the thread to be used for the rigging were drilled diagonally into the block and out through the bottom. When the masts were stepped, the standing rigging was run right through the holes and left with long ends. A little quick drying cement was rubbed on the tips of the threads to make them stiff enough to be pushed through without using a needle. The threads were drawn taut from the underside in pairs, one from each side of the ship, and held with toothpicks dipped in cement and then broken off flush.

After the model had been finished, the two halves were redoweled and cemented.

# Carborundum Stones


## *in the Hands of a CRAFTSMAN*



F. E. TUSTISON  
HEAD OF THE  
SCIENCE AND HOME MECHANICS  
DEPARTMENT,  
STOUT INSTITUTE

*Says* --

«I have used Carborundum Stones for years for sharpening my shop tools. As an abrasive I have found Carborundum to be fast cutting and yet producing the keen edge necessary to good work.»

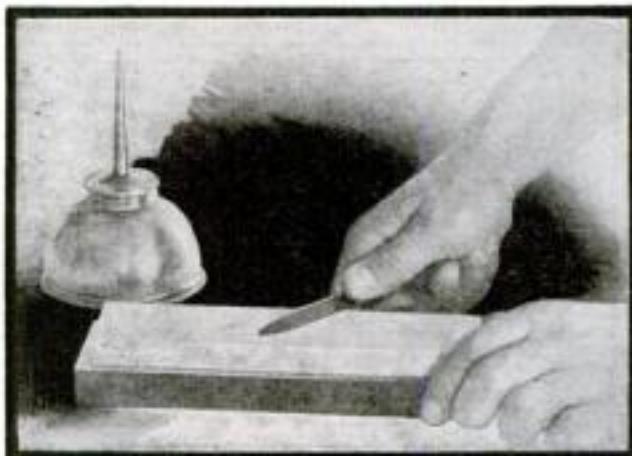

**A** CARBORUNDUM Brand Sharpening Stone is one of the most useful items in any tool kit or workshop. The amount of work any mechanic can turn out and the quality of the finished product is largely dependent on properly sharpened tools.



Every user of edge tools should have a Carborundum Brand Sharpening Stone to complete his kit. There are Combination Stones—Slip and Gouge Stones, Extra Hard, Extra Fine Stones—for all edge tools.

Sold by Hardware Dealers  
Everywhere

# Carborundum

## BRAND SHARPENING STONES

THE CARBORUNDUM COMPANY  
NIAGARA FALLS, N. Y.

Canadian Carborundum Co., Ltd., Niagara Falls, Ont.  
Carborundum is the Registered Trade Mark of The Carborundum Company for its Products

Advice on  
HOW TO SHARPEN  
WOOD WORKING  
TOOLS



THE CARBORUNDUM COMPANY  
NIAGARA FALLS, N. Y.

The Carborundum Company, Niagara Falls, N. Y.

Send me your booklet: "How to Sharpen Wood-working Tools" P1

Name .....

Address .....



## Longer Life Higher Efficiency

for  
A. C.  
Radio  
Tubes



## BENJAMIN Shock-Absorbing Sockets

Lessens the possibility of short circuiting the elements of the tube.

Heavy spring contacts provide excess current carrying capacity.

Special side wiping contacts assure positive tube to terminal connections.

Bronze suspension ring, contacts and soldering terminal all in one piece.

Terminals plainly marked.

For direct attachment to panel... \$ .75

For mounting on top of panel.... 1.00

At all Radio Dealers

Manufactured by

**Benjamin Electric Mfg. Co.**  
Des Plaines, Ill.

New York Chicago San Francisco

## ... A New IDEAL Model Airplane



### The "American Eagle"

Wing Span 26 in. Weight, 3 3/4 oz.

Distinctive in design... new in construction... a light, durable, fast-flying model with IDEAL'S twenty years experience behind it, and months of dependable performance before it! Wonderful stability in the air, and GUARANTEED TO FLY when hand or ground launched. Constructed largely of Balsa wood, with many new features; motor can be wound with winder without removing from fuselage; indestructible landing gear; new type propeller. Construction is easy; also sold completely assembled.

**Construction Assembled**  
**Set \$2.50 Model \$5.00**

FORD Tri-motor MONOPLANE. 3 ft. Model.  
Construction Outfit... \$8.50

Sold by Toy, Sporting Goods and Department Stores. Ask for IDEAL Model Airplanes. If unobtainable, order direct. West of Denver, prices are 50c higher.


64 Page Catalog of Models, Parts 5c  
and Supplies for Builders

IDEAL AEROPLANE & SUPPLY CO., Inc.  
28 West 19th St., New York City

## How I Motorized My Home Workshop

By G. R. W. ROBERTS

FOR a home workshop where only one machine is in use at a time, I have found after considerable experimenting with other arrangements that the one illustrated in Fig. 1 is practical and economical. When I want to use any particular machine, I simply put on the belt for it and leave off all the other belts. Then I use the nearest switch to start and stop the motor.

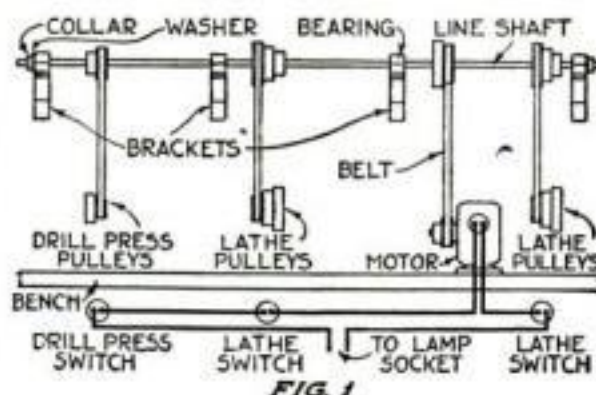


General arrangement of the motorized workbench with motor, line shaft, and switches.

The machines—two lathes, a drill press, and a grinder—are arranged on the 2 by 10 in. by 12 ft. plank that forms the front of my bench. The line shaft, consisting of 10 ft. of 3/4-in. cold-rolled steel, is mounted by means of four homemade bearings on the wall over the bench.

A two-speed pulley on the motor and another on the line shaft give a choice of 500 and 650 revolutions a minute. At the proper locations on the line shaft, I placed some cone pulleys to correspond with those on the machines.

For bearings I use the method of construction illustrated in Fig. 2. Two oak blocks 1 by 1 1/2 by 3 in. are bolted together and bored to receive a piece of brass pipe or a brass bushing. To keep the bushing from turning, I solder on a small piece of brass, which fits into a recess in the lower block. A hole is

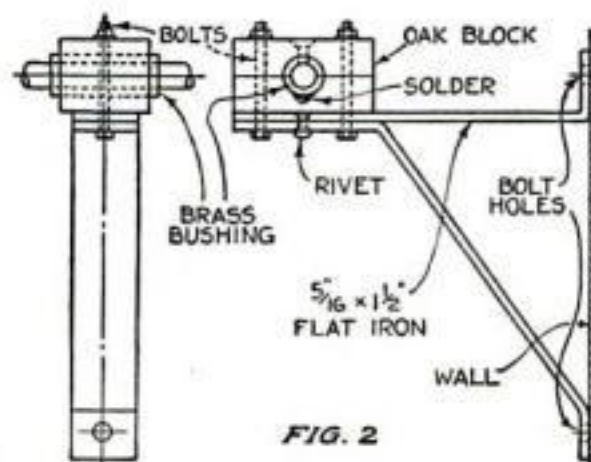

Front and end views of one of the homemade shaft bearings. The shaft is 3/4 in. in diameter.

drilled for oiling the shaft, and the blocks are bolted to flat iron brackets.

All the belts are 1-in. single-ply leather, which I cut to the correct length and take back to the belt supply dealer to have him fasten the ends with a special machine.

To make each of the line-shaft pulleys, I use two pieces of 1 1/8-in. thick wood, as

**"STERLING HOMES"**

The "Pontiac"

**THIS MODERN 6 ROOM HOME NOW ONLY \$1024**

**PAY ONLY \$15.65 Per Month**

Why not live in a modern new home of your own instead of in an old and shabby rented house that is costing you a fortune every year? You can build a new home on the **STERLING PLAN** and pay for it with your rent-money—as low as \$8.10 per month for a 6-room house. We even advance cash to help you build, if you own a well located city lot.

**Build Now and Save Money!**

We ship you any home you select, ready to erect—lumber cut to fit. **FREIGHT PAID TO YOUR STATION.** Big discounts for cash. Lowest prices in the history of our company. Send 25c in coin today for beautiful Color book of Sterling Home Plans and select the home that you want us to ship you.

International Mill and Timber Co.  
91010 S. Wenona Ave., Bay City, Mich.

**Popular**

LEARN saxophone, cornet, trombone—any band instrument. Be popular—make more money. It's easy. Play tunes first day. Ready for band or orchestra in 60 to 90 days. The world's greatest band leaders and soloists endorse Conn. Easiest blowing qualities; speediest action. Yet these superior instruments cost no more. Write for Free Book and full details of FREE TRIAL and Easy Payment offers. Mention instrument.

C. G. Conn, Ltd., 1002 Conn Bldg., Elkhart, Ind.

**CONN**  
WORLD'S LARGEST  
BAND INSTRUMENTS

**Reduce This Pleasant Easy Way**

**Better Figure Better Health**

30 DAYS FREE TRIAL  
LOW PRICE  
EASY PAYMENT

**GET MY FACTORY PRICE!**  
Down goes weight—up goes health and spirits—reduce hips, back, thighs, calves. Write for Free Book—low factory price and special offer. The Wm. Campbell Company, Dept. 403 Alliance, Ohio.

**CAMPBELL'S Electric Exerciser**

## The Real Estate Educator

A most comprehensive yet concise arrangement of useful facts about buying, selling, leasing and sub-letting of Real Estate, contracting, for erection or repairs, mortgaging, transferring, insuring, etc.

256 pp. Price \$2.00, postpaid.

**POPULAR SCIENCE MONTHLY**  
381 Fourth Ave. New York, N. Y.

**FREE 10 DAYS TRIAL**

**\$1.50 INKOGRAPH PENCIL POINTED PEN**

Writes with ink smooth as a lead pencil on cheapest or finest paper, without miss, skip or blur. Won't blot, scratch or leak. Makes 3 carbon copies at one time with original in ink. Anyone can use your Inkograph—hard pressure cannot spread or injure its 14 Kt. gold point. Patent automatic feed prevents point from clogging. No complicated mechanism. Best materials and workmanship. Fully Guaranteed.


Send No Money. Pay postman \$1.50 plus postage. Sent prepaid if remittance accompanies order. Money back if dissatisfied in 10 days.

**INKOGRAPH CO. Inc.** 161-61 Centre St., New York City

**AGENTS** Send for Inkograph or FILK Sales plan booklet. Sells on sight—no investment.



in Fig. 3. Two of the edges are fitted together, and the center and the diameter of the pulley are marked. In the joining edge of each piece at the center, two V-cuts are made with a saw so that

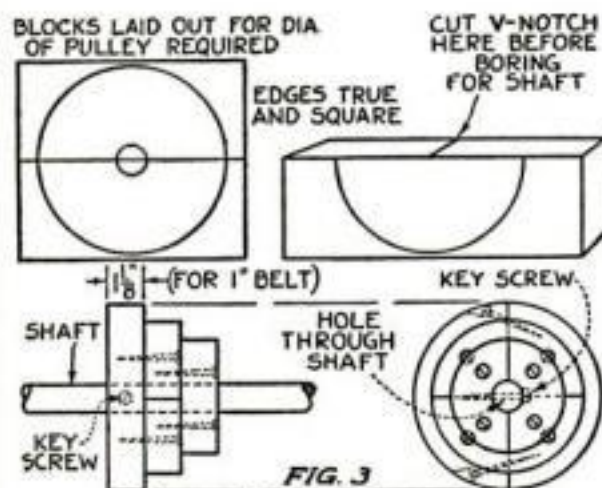


Method of laying out and preparing the step pulleys and fastening the parts to the shaft.

when the pieces are clamped together the notches will form a guide for the point of the bit used to bore the holes for the shaft. This hole is bored to the exact size of the shaft, and the pulley is then cut.

A  $\frac{1}{4}$ -in. hole is drilled through the shaft at the desired location, and one half of the pulley is fastened with a No. 14 screw, which holds it securely to the shaft. The other half is then fastened at the edge by using glue and screws driven at an angle as shown. Then the remaining steps are assembled, with the grain of each crossing that of the one before.

If care is taken in laying out and cutting the individual blocks, the complete cone pulley will run fairly true. To finish it off I make a temporary tool rest and turn it with a chisel right on the line shaft, giving each step a little crown so that the flat belt will run in the center.

To keep an even tension on the motor belt, the motor is mounted on a separate block (Fig. 4), which is hinged at one end and has an adjusting screw at the other.

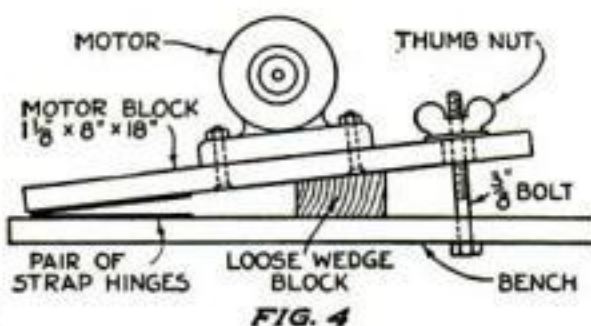

The motor is mounted on a hinged block so that the belt can be tightened quickly and easily.

### Simple Tension Regulator

WHEN the home experimenter needs a simple device for regulating the tension of light springs or similar purposes, he can make one quickly and cheaply from the adjusting nut and stem of a pair of ordinary school compasses as shown. It can be mounted by means of a staple or a bent nail.—F. B.



Spring tightener made from a cheap compass.



## If You Ream One Hole a Year ..or Ten Thousand.. Read This

MAYBE you're only called upon to ream one hole a year. Even so, you need a good reamer: that one hole has to be accurate to a thousandth—perhaps a ten-thousandth of an inch, or trouble will follow.

Perhaps, on the other hand, you ream 10,000 holes in the course of a year. Then your reamer must be more than precise: it must be tough, long wearing, hardened and tempered to stand the gaff.

In either case, your one best bet is a reamer bearing the Greenfield trademark. So precise are Greenfield ream-



SMALL TOOLS  
TAPS AND DIES  
SCREW PLATES  
TWIST DRILLS  
REAMERS  
PIPE TOOLS

ers that the reputations of many of America's finest motor cars are entrusted to the work they turn out. So finely tempered that their blades stay sharp long after the average reamer has been thrown on the junk pile.

The skill and experience of many of the world's leading small tool engineers go into making Greenfield reamers the finest that can be produced. Yet Greenfield's tremendous production facilities allow us to sell them at a price no higher than you'd pay for an ordinary reamer. Write today for catalog # 29.

NEW YORK:  
15 Warren Street



DETROIT: 228 Congress Street, W.

CHICAGO:  
611 West Washington  
Boulevard

Canadian Plant: Greenfield Tap & Die Corp., of Canada, Ltd., Galt, Ontario

### Build a CLOCK for Pleasure or Profit!

**FREE BOOK** Chock full of Clock-Making and Money-Making Ideas. Gives full details, descriptions, prices of movements and parts. Write NOW for your copy.

Shows how YOU Can Make Fine Clocks Right at Home THOUSANDS of men have built our Clocks. For their own use—or to sell at money-making prices. It's easy, fascinating. Only ordinary tools needed. We furnish plans, instructions, parts. Works all assembled, ready to install, as low as \$1.65; others with chiming at all prices. You make the case, or simply assemble knock-down parts. Cash-in on the demand for craftsman-built Mantel Clocks, Banjo Clocks, Grandfather's Clocks. Here's a hobby that PAYS—in pleasure, in ownership and in spare-time or full-time PROFITS!

Write for FREE Catalog and Special Blue Print Offer  
**AMERICAN CHIME CLOCK COMPANY**  
1691-K Ruffner St. Philadelphia, Pa.

### Chemical Tricks for Boys


Surprise and puzzle your friends with magic chemical tricks; make ink; dye cloth; test water and soil; write secret letters with invisible ink; pour blue, brown and black liquid from a pitcher of water. All these and many more chemical stunts are easy with Chemcraft Junior. It's the best box of fun you ever had! Get yours now.

**ONLY 25¢ POSTPAID**

**FREE Catalog** and Chemcraft Magazine to every boy who writes for it now. Full of new ideas and chemical stunts. Ask for yours right away!

**THE PORTER CHEMICAL CO.**  
56 East Washington St.  
Hagerstown, Md.



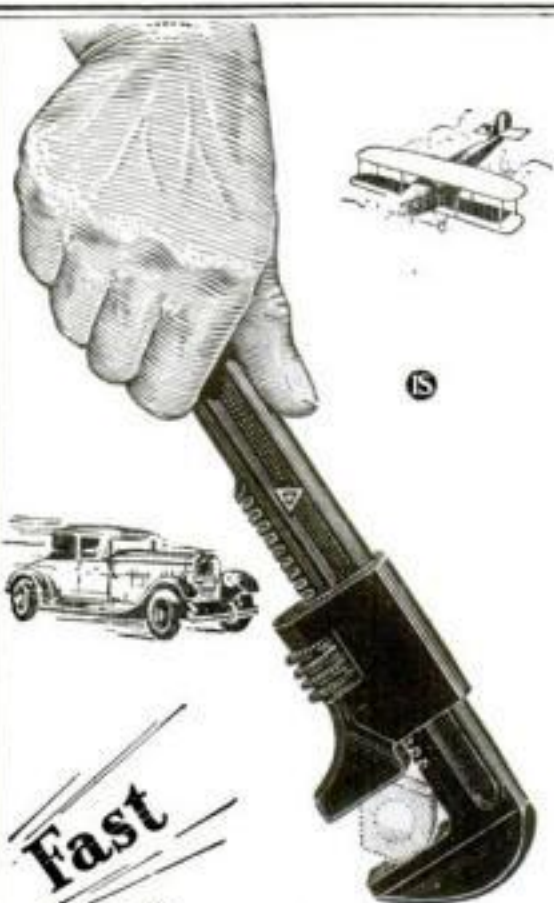

**Fast  
Firm**

**with Forged Jaw**

*Model "G"  Wrench*

Rapid-adjusting, rigid grip; no play, no binds, no excess weight. All business!

Bar and jaw both forged, and balanced to a nicety.

Here is Billings-craft in one of the handiest of tools-you-can't-work-without, automotive-wise.

So, accept our special-price offer with the Coupon below.

*The*  
**BILLINGS & SPENCER**  
Company  
Hartford, Conn., U.S.A.

Visitors always welcome

New York: 11 Park Place  
Chicago: 565 W. Washington Blvd.

SPECIAL COUPON

THE BILLINGS & SPENCER CO.  
Hartford, Conn.

SEND ME your Model "G" Adjustable Wrench in the 7½-inch length for 85c herewith (or) 9-inch length for \$1.15 herewith. Attached is Money Order (or) check.

Name.....

Street No. ....

Town & State .....

My Dealer's Name.....

## How to Turn a Pair of Candlesticks from Steel

By J. W. BOLLINGER



The candlesticks at the right afford a fascinating project in metal turning. Careful calipering is required, as shown above, to get both the candle cups alike.




**A**MATEUR craftsmen who enjoy lathe work will find these metal candlesticks a satisfactory problem on which to try their skill.

A piece of 1¼-in. cold-rolled steel about 5 in. long will make two cups. Face off the ends, bore a ¾-in. hole 1 in. deep into each, and drill the rest of the way through the piece with a 1¼-in. drill. Thread this hole for at least 7/8 in. with a ¼ in.-20 U.S.S. tap.


Make a full size drawing of the cup on paper. With the cutting-off tool set 1¼ in. from the end of the stock, cut in about ¼ in. deep to start. Move the cutting-off tool farther along the stock and cut into it enough to bring the metal down almost to the finished size at that point. Take several such cuts.

Reverse the stock and take the same cuts on the other end. Remove the waste stock by using both longitudinal and cross-feed levers at the same time.

File one of the cups and polish it with No. 00 emery cloth and No. 00 sandpaper. Cut it all the way off. Caliper the polished cup and the one

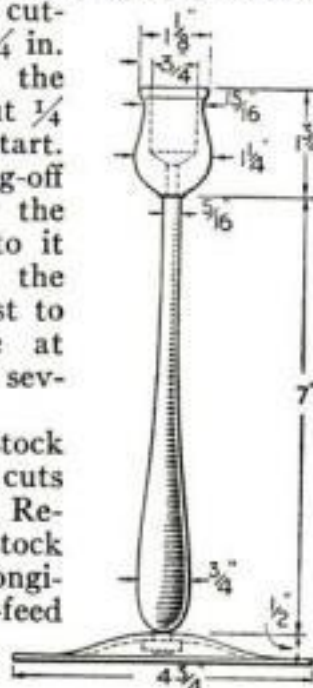

Shape and dimensions of the candlesticks; they are made in three parts, cup, stem, and base.

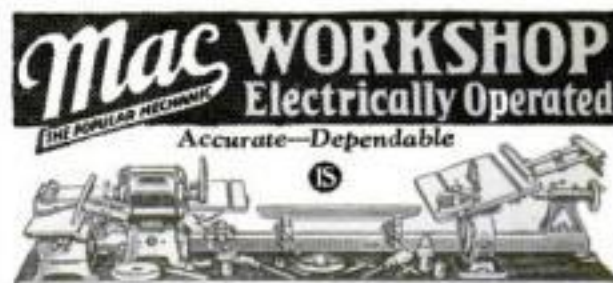

**THE Home Workshop**—how would you like to have one that could turn out the very finest pieces of craftsmanship! Precision in every operation. **MAC—THE POPULAR MECHANIC** does just that. It rips, cross cuts, surfaces, drills, grinds, polishes, etc.—and does it better than you ever imagined your own tools could possibly do! Used by professional and amateur mechanics; manual training schools; churches; hospitals, governmental departments—and why? Because **MAC** meets every demand of the practical woodworker who wants the very best!

### MAC Features

Absolutely dependable performance at all times.  
Specially designed 1/3 h.p. motor.  
Compact—occupying very small space.  
Comes to you ready to plug into light sockets!  
Easy to pay for—special down payment plan.

### Easy to Own a MAC

Let us send a MAC workshop on approval, 10 days of free trial. Very small deposit and the MAC is shipped to you immediately. If satisfied pay balance in small convenient payments monthly.

**Get Details Before You Buy**  
Mail coupon now for complete descriptive literature on MAC—THE POPULAR MECHANIC workshop. You'll want to know about the low prices and easy terms!

MIDLAND APPLIANCE CORP.  
Dept. 1020, 225 N. Michigan Ave., Chicago.

Send me complete descriptive literature and prices on MAC—THE POPULAR MECHANIC workshop.

NAME.....

ADDRESS.....

**Andy Sannella**  
Talks to Reed Players.  
**Get this Free Book!**

On the air tonight, and every night, Andy Sannella is earning a fabulous salary with his Selmer Sax. In his book of "Advice to Saxophone Players" he gives more valuable information than in ten private lessons. This book is free to all reed players. Send a postal today for your copy. No obligation.

If you will mention the instrument you play, we will send also, free sample of our **Alexandre Reeds. They Play!**

**Selmer**

59 SELMER BUILDING, ELKHART, INDIANA  
In Canada: 516 Yonge St., Toronto

**ZIP-ZIP SHOOTER**

THOUSANDS of boys are made happy with this wonderful Zip-Zip shooter, scientifically and practically made. If you like hunting and outdoor sports, get a Zip-Zip shooter with plenty of pep and force. If your dealer happens not to have them, order from us. Zip-Zip shooter 35c or three for \$1.00; send stamps, coin or money order.

**AUTOMATIC RUBBER CO.**  
Columbia, S. C.

**BURN YOUR NAME ON TOOLS**  
WITH THE **ARKOGRAP**

Protect Your Tools From Theft. Write with electricity any name or design on the hardest and finest tools and instruments, or any metal, like writing on paper with pen or pencil. Complete outfit \$3.50 Prepaid Anywhere. Interesting illustrated circular free. Write today. Agents wanted.

**ARKOGRAP PEN CO.**  
1171-A East Stark St., Portland, Oregon

**Binder**  
for  
**Popular Science Monthly**  
Price \$2.00  
Postage Prepaid

**POPULAR SCIENCE PUBLISHING CO.**  
381 Fourth Avenue  
New York City

In two-tone Artcraft (looks like leather—lasts forever) with the name of the magazine stamped in gold on cover. This binder will hold six copies of the magazine, and new copies can be slipped as easily as inserting a letter in an envelope.





How the disk of metal for the base is "dished" or "raised" with one powerful hammer blow.

still to be polished and keep working until both are as nearly alike as possible.


Cut two pieces of  $\frac{3}{4}$ -in. cold-rolled steel 9 in. long, and center-drill each end. Move the tailstock center over  $\frac{1}{2}$  in., and mount a piece between centers. After making a drawing of the upright on paper, cut the metal almost to shape, work it down, and polish it carefully. Make the other piece as nearly like the first as possible.

Line up the tailstock center and turn the upper ends of the upright down to  $\frac{1}{4}$  in. in diameter. Thread these ends with a  $\frac{1}{4}$  in.-20 U.S.S. die. Cut away a small part of the threads on the uprights near the shoulder so that it will be possible to draw the cups and the uprights snugly together.

Cut the base end of the uprights to  $\frac{3}{8}$  in. in diameter and thread with a  $\frac{3}{8}$  in.-16 U.S.S. die.

Get two pieces of No. 16 sheet iron, which is about  $\frac{1}{16}$  in. thick, for the bases; or even a little heavier stock will do. You can cut it down on the lathe if you wish.

To make the bulge in the center of each base, or "raise" it, as it is called,

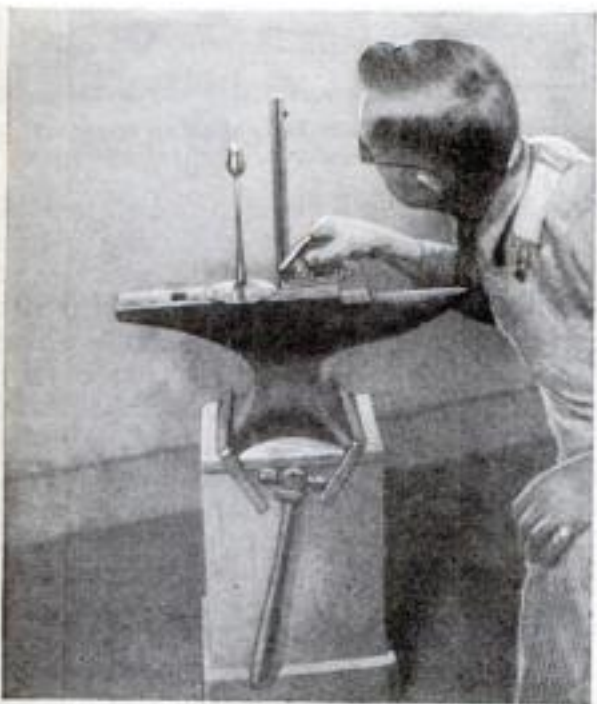

Checking the straightness of an assembled candlestick—a certain test of the workmanship.


**"The Von Hoffmann Graduate Qualifies"**

# Von Hoffmann Aircraft School

**Will Give You  
a Thorough—  
Practical Training**

The training which the Von Hoffmann student receives is the exact training which he must have to qualify for immediate positions on the ground or in the air. The cost is low considering daily flying, the thoroughness of theoretical and ground instruction on latest modern type planes, Wright Whirlwind and other standard motors.

**Our Instructors Are Ex-Army Pilots  
Each with Over 3000 Hours of Flying**

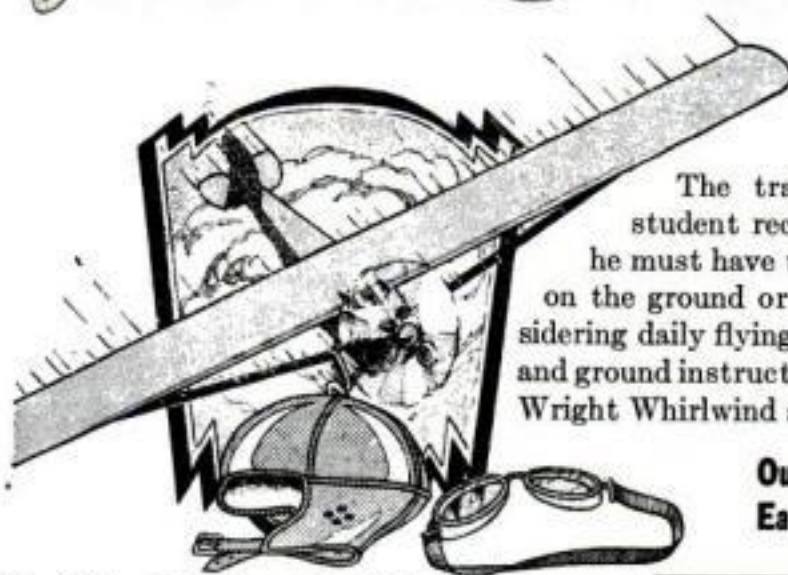

Our School Registered, All Instructors and Airplanes Licensed by U. S. Government, Aeronautics Branch, Dept. of Commerce

All Airplanes used by us for both instruction and passenger service are planes licensed by the U. S. Government and our instructors are U. S. Licensed Transport Pilots and U. S. Licensed Mechanics. Our equipment is new and of modern design, subject to daily U. S. Government Inspection. (We have a resident U. S. Government Inspector on the field—think what this means to you.)

**A  
Record  
to Be  
Proud Of**

Our record to date shows that every Von Hoffmann graduate has received a U. S. Government License.



## Flying Course

We teach you by actual flying and practical instruction; no long course needed. No student bond required.

## Easy Monthly Payments

It is easy to pay the Von Hoffmann way because small monthly payments are extended. Let us show you how you can start now and pay later, even after you have finished the course of training.

## Von Hoffmann Aircraft School

822 Lambert-St. Louis  
Flying Field  
(Lindbergh's Own Field)

St. Louis,  
Mo.



**Start NOW!**

**Free Information Coupon—**

Von Hoffmann Aircraft School, 822 Lambert-St. Louis Flying Field (Lindbergh's Own Field), St. Louis, Mo.

Please mail FREE information at once.

Name.....  
Address..... Town.....  
State..... Age.....



Day-time System and protection at night. Your tools are safe when you keep them in a GERSTNER Tool Chest. A size and a style to suit every machinist and tool maker shown in free catalog.

H. GERSTNER & SONS  
570 Columbia St.,  
Dayton, Ohio.



## Print Your Own

Cards, stationery, labels, paper, circulars, tags, menus, book etc. Save money and time, cut cost in half. Sold direct from factory. Pays for itself in a short time. Complete Outfits, \$8.85 up. Job Press, \$11, \$29; Rotary \$149. Print for Others, Big Profits. All easy, rules sent. Write for catalog of presses, type, paper, cards, envelopes, paper cutters. The Kelsey Co., P-33, Meriden, Conn.



\$150 to \$300 MONTHLY PROFIT — 30 DAYS' TRIAL Charges batteries in  $\frac{1}{2}$  the time required by others and gets the business. BIG YEAR ROUND PROFITS. Best paying business in automobile field. Requires no special experience, uses small space. 30 DAYS' FREE TRIAL at our risk under absolute money back guarantee. Write today for bulletin X, giving full particulars. HOBART BROS. CO. Box P109 TROY, OHIO





## You Expect Good Radio Reception — Let ELECTRAD Help Insure It!

No corner-cutting with ELECTRAD quality. You can depend on getting the best in ELECTRAD Controls and Resistances—  
at the right prices.

### Super-TONATROL High Power Volume Control

U. S. Pat.  
1034103-  
1034104  
& Pats.  
Pend.



Built to meet modern radio needs for a lasting efficient control. New type volume element, fused to an enameled steel plate. All-metal construction insures rapid heat dissipation. 7 types, \$2.40 to \$3.50, at your dealer's.

### TRUVOLT—The Safe Resistance for Eliminators

Patented winding of heavier resistance wire in small space cooled. Longer life—more accurate service—fewer burn-outs. Sliding clip for exact adjustment of resistance value. Simplifies eliminator construction. Also Variable type with knob for fine adjustment, in 22 stock sizes, \$2.50 each.



U. S. Pat.  
1676809  
& Pats.  
Pend.

ELECTRAD, INC.  
Dept. PS10, 175 Varick St.  
New York, N. Y.

Please send  
☐ Super-TONATROL ☐ TRUVOLT data

Name.....  
Address.....


# ELECTRAD

A definite program for getting ahead financially will be found on page four of this issue.

## Cunningham RADIO TUBES



Quality  
safeguarded  
from within

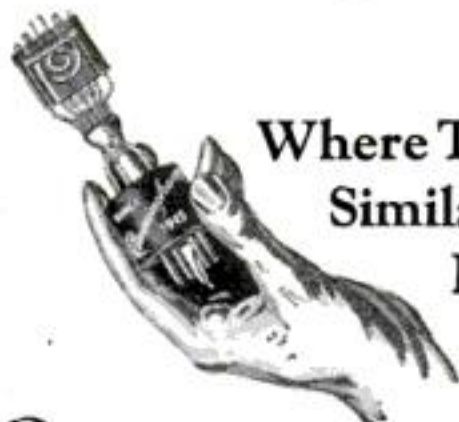

Where Tube  
Similarity  
Ends

Outside appearances may be similar or even identical between various makes of radio tubes.

It is the accuracy with which the parts are precisely manufactured and tested that gives Cunningham Radio Tubes their remarkable outstanding quality and long life.

E. T. CUNNINGHAM, Inc.

New York Chicago San Francisco  
Dallas Atlanta

### New Complete "Wonder" Workshop Outfit Saves you \$15.00



Now you can have this new, amazing 8-in. Combination Saw (18 tools in one), shipped on 15 days' approval, at manufacturer's risk. A complete ideal machine shop for factory, workshop or home; will rip, cross cut, bevel, miter, mortise, drill groove, tenon, grind, rabbet, buff and polish 113 H. P. A. C. motor included with all attachments. Write quick for special 10 day offer.  
**SCOTT-BANSBACH CO.**  
Dealers Wanted  
148J-So. Clinton Street CHICAGO

## Build Your "SCREEN-GRID DISTANCE GETTER"

Radio Receiver

Featured in the September  
Popular Science Monthly

With The  
**HAMMARLUND  
PARTS**

Used By The Designer

THE Popular Science Model of this excellent receiver, described as "Ten Times as Sensitive as the Average", was constructed with Hammarlund Condensers, Coils, Chokes, and Shields.

Insure your results by using the Hammarlund parts that radio engineers everywhere praise and use.

Write Dept. P S 10 for helpful  
Hammarlund folders.

**HAMMARLUND MFG. CO.,**  
424-438 W. 33rd St., New York

For Better Radio  
**Hammarlund**  
PRECISION  
PRODUCTS

get a pipe collar or ring about 3 in. in diameter, lay the stock on this ring, and place over the center of the disk the piece of scrap cold-rolled steel that was left after you made the two cups. Strike the scrap metal a blow with a heavy sledge. One good blow ought to do the trick.

Hammer down the edge of the iron until the base rests flat; lay it back over the ring again and hammer the bulge until it is the same all around.

Mount the base in a chuck and drill a  $\frac{3}{8}$ -in. hole in the center. Face off a small portion of the metal around this hole for the upright to rest on. Polish the pieces for the base as you did the cups and the uprights.

Screw the cups onto the uprights and fasten the bases to the uprights with  $\frac{3}{8}$ -in. nuts. Test with a square.

If you want to make the bases heavier, turn the candlesticks upside down and pour in Babbitt metal, but first file the sides of the nut off at an angle so that the babbitt will be held in place as if by a dovetail.


Have the candlesticks silver plated at a commercial plating works, or merely polish them, dry them thoroughly in front of a fire to remove all moisture, and give them a coat of transparent lacquer. If you prefer, you can mix up some "antique copper" bronzing mixture and make them look like old copper candlesticks. Finish the job by gluing felt from an old felt hat under the base.

When you buy the candles, take the candlesticks along and try several sizes and styles to see which look best.

### Sharpening a Glass Cutter

MANY a glass cutter that has been thrown away because the wheel failed to give satisfactory service might have been used many more times if re-sharpened on a fine oilstone.

To sharpen a wheel, hold the cutter as if to cut glass but with the wheel inclined on the oilstone as shown at A and B.

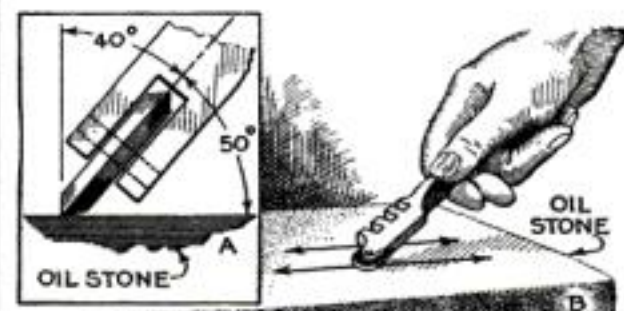

How the glass cutter is held at an angle and rubbed on the oilstone in the sharpening process.

The angle of the handle to the stone will be about  $40^\circ$  off the perpendicular, while the face of the wheel will be at an angle of  $30^\circ$  to the side of the stone. With the cutter in this position, work the wheel back and forth in the direction of the arrows. If held properly, the wheel will turn, but it will be ground sufficiently to restore its keen cutting qualities. Reverse the cutter to sharpen the opposite bevel.—C. ANTHONY VAN KAMMEN.

To MAKE a keen cutting edge on plane bits, chisels, and other sharp-edged tools, try using a piece of cork linoleum as a strop. After sharpening the tool on an oilstone, stroke it on the burlap side of the linoleum.—AUGUST MILLER.



## New Horn Improves Old Phonograph

By WALTER E. BURTON

OLD phonographs, which the newer music boxes make a little out of date, can be given a better voice by substituting an exponential or air-column horn for the old one and by adding an improved reproducer and tone arm. This type of horn can be obtained from almost any large radio supply house. Its size will be regulated by the space available in the phonograph cabinet, but obtain one with as long a tone-travel space as possible so that the low tones will be reproduced well.

In a cabinet type phonograph, the horn may be placed in the compartment formerly occupied by the old horn or in the record compartment, the latter being larger and better.

After the space in the cabinet has been cleared, the horn is inserted and padded around the edges with felt or other material. A section of metal, rubber, or fiber tubing, large enough to slip over the small end of the horn, serves to connect

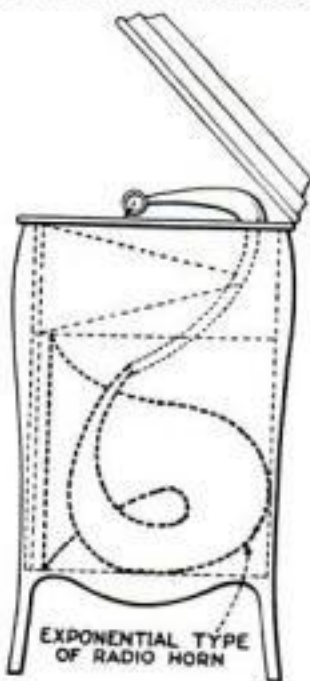


Diagram showing horn in phonograph cabinet.




How to set up a horn experimentally to test for yourself the difference in tone quality.

the tone chamber with the reproducer arm. The connection should be as airtight as possible.

Provided you can obtain the use of a suitable horn, you can test the desirability of the change by connecting the reproducer and horn temporarily with a vacuum cleaner hose as illustrated.

## MAKE THINGS QUICKLY and EASILY with this COMPLETE MOTORIZED WORKSHOP

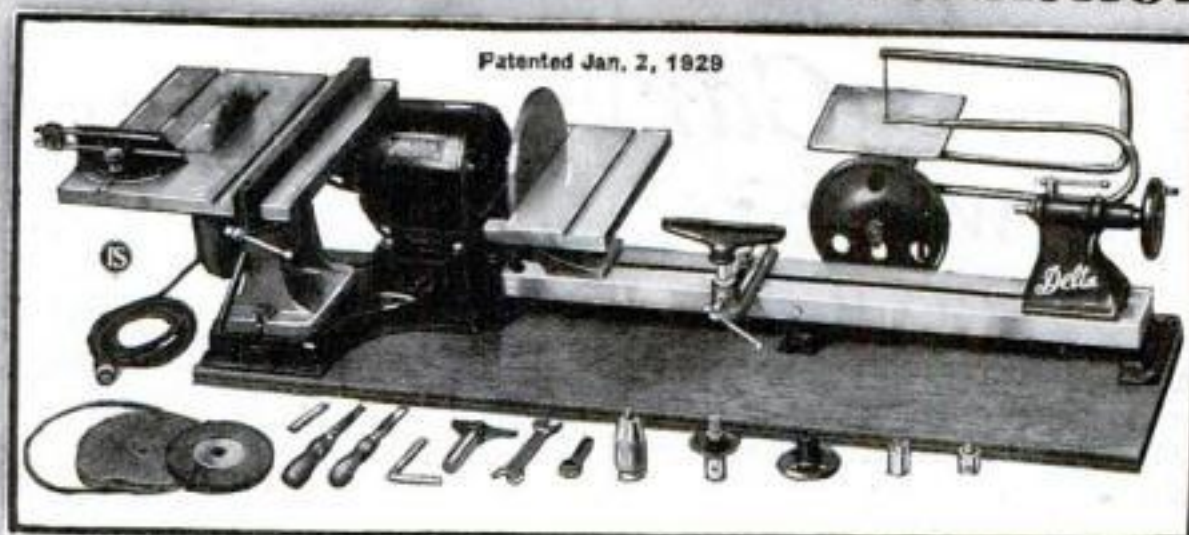

Patented Jan. 2, 1929

### The "Delta" Electric Handi Shop Designed for Efficiency in Operation

Practical craftsmen appreciate this man-sized, motorized workshop with its carefully planned, efficient design. The "Delta" is equipped with a smooth-running, powerful, two-shaft motor. Permits carrying on two or three important operations at one time without continually dismantling set-up. Much-needed Circular Saw available 90% of the time! Also has heavy Triple Foundation Lathe Bed (no rods), guaranteed not to chatter; Improved Patented Tilting Tables on Circular Saw and Sanding Disc; Automatically Oiled Bronze Bearings. Comes completely assembled, thoroughly tested, on heavy veneered wooden base. Many new exclusive features in 1929 model—new low price.

### Enjoy the thrill of Working with Quality Machinery

Make the things you have always wanted to make, with this sturdy, full-sized equipment. Save money on repair work—earn money in spare time. It is so easy—so quick, with the "Delta." Complete Handi-Shop includes all necessary equipment for Circular Sawing, Wood Turning, Scroll Sawing, Sanding, Drilling, Grinding and Buffing. Full instructions and complete set of working blue-prints furnished.

### Sent on 10 Days Trial Easy Terms

Without obligation, you can test the Handi-Shop under actual working conditions for 10 days in your own home. Send at once for FREE illustrated literature, giving complete description of the new 1929 Model "Delta" Handi-Shop, and full details of 10-Day Trial Offer and Easy Payment Plans. Dept. B-109

**Delta Specialty Co.**  
1661-1667 HOLTON STREET  
MILWAUKEE, WISCONSIN



**BLUE PRINTS INCLUDED**  
With each Handi-Shop, at no extra cost, is furnished a complete set of working drawings. Above are a few of the hundreds of useful articles you can make quickly and easily with this practical workshop.

Delta Specialty Company, Dept. B-109  
1661-67 Holton St., Milwaukee, Wis.  
Please send me, FREE, illustrated literature describing 1929 model "Delta" Handi-Shop. Also details of 10 Day Trial Offer and Easy Payment Plans

Name.....  
Address.....

### You'll Turn Out Beautiful Work With Your H & A Band Saw

Work you'll be proud of—because it's the saw that thousands of skilled workers choose—smooth, speedy, accurate. A heavy-duty outfit, but reasonably priced. Portable, electric. Write for catalog and prices.

HESTON & ANDERSON

810 Market St.  
Fairfield, Iowa



**Two Free Books**

One is 48 pages printed in colors, other 32 pages. Ask for Books 3 and 4. You will be surprised.  
**PLYMOUTH ROCK SQUAB COMPANY**  
616 H Street, Melrose Highlands, Massachusetts.  
Established 25 years. References: ask bank or local company.

Breed squabs and make money. Sold by millions at higher prices than chickens. Write at once for two free books telling how to do it.

### A Tube NECESSITY - Not an Extra

There is no choice. You must use Amperite to automatically control variations in the "A" current supply to your tubes. A type for every tube—A.C. or D.C. \$1.10 with mounting (in U. S. A.) at all dealers.

**PREVENTS CURRENT WABBLE**

This symbol in a radio diagram means—



**Radiall Company**  
561 Broadway, New York


FREE "Amperite Blue Book" of modern circuits and valuable construction data. Write Dept. PS10

**AMPERITE**  
The "SELF-ADJUSTING" Rheostat



## Wash Your Car With a GY-RO Brush

Automobiles are being washed in every state in the Union with GY-RO WHIRL-O brushes. It is the new way of washing cars quickly and at minimum cost. Read what one user says: "We have found your brush of great help to us in washing cars, not alone because of the speed with which it is done, but because it prevents scratching."

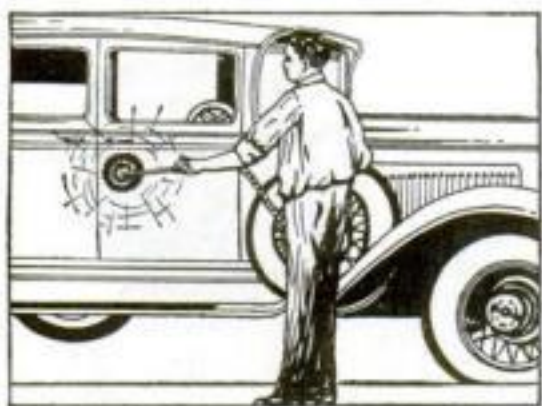

GY-RO washes an auto in 15 MINUTES! Washes and polishes at the same time. Cleans without scratching the finish. Car dries without streaks.

One brush will wash 1,000 cars, and more. No water runs down the handle. You keep dry.

Not necessary to dress for the occasion. This Wonder brush also cleans outside woodwork, screens and windows, perfectly; better than anything else can clean them. Ask the users!

GY-RO is easy to use. You simply attach it to any ordinary hose and move it over the car. You'll be amazed with its simplicity and effectiveness. We want more salesmen to sell these great time and money savers. If you can walk and talk and use your hands you can take orders for GY-RO. It's easy. Really it is. We help you.

Water pressure revolves center brush



**Gyro Brush Co.**  
Dept. P. S.  
Ampere,  
N. J.

Gyro Brush Co., Dept. P. S., Ampere, N. J.  
Gentlemen: Please send me a GY-RO WHIRL-O brush. I enclose \$3.75. M. O. ☐ I am interested in your special offer to salesmen. Please send me full information.  
☐ Send me a GY-RO brush C. O. D.

Name.....  
Address.....  
City..... State.....

## Two Pipes Aid in Bending Heavy Reinforcing Bars



Using two pipes to make so-called "hairpin" bends in iron bars for reinforced concrete work.

CONCRETE workers are frequently called upon to bend reinforcing bars and heavy bar iron without heating, often with no adequate facilities. A simple way to bend them is to use two pieces of iron pipe, preferably about 4 ft. long.

The bar is passed through the two pipes, one of which is held down with a foot while the other is pulled up and, if desired, bent back to make what is known as a "hairpin" bend. On extra heavy rods two men can work together; one holds down while the other makes the bend. There is no tendency for the rods to kink in the wrong place.—H. L. WHEELER.

## Small Worm Wheel Cut with Ordinary Tap

WHEN the writer was confronted with the problem of making a small worm and gear for light service, he used a method that simplified the work very much. In place of first cutting gashes in the worm-wheel blank, he cut the teeth from the solid, and used a tap for a hob.

A piece of flat steel was tapped for a  $\frac{3}{8}$ -in. cap screw, about which the worm

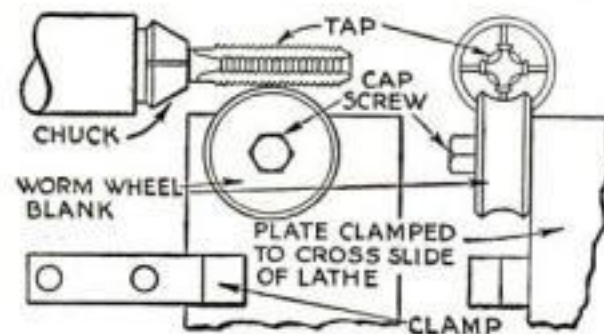



Diagram showing how the worm wheel blank is mounted for cutting the teeth with a tap.

wheel revolved. The piece of steel was clamped on the cross slide of a small lathe at the right height in relation to the spindle, and the tap was held in the chuck.

When the lathe had been started, the wheel was fed very slowly into the tap, which cut the teeth without stripping.

What made this result possible was the careful sizing of the blank. It had been turned so that its circumference was exactly the product of the pitch by the number of teeth. The worm to mesh with the wheel was threaded as an ordinary screw.—CHARLES KUGLER.

## For safety in Exercise wear a PAL

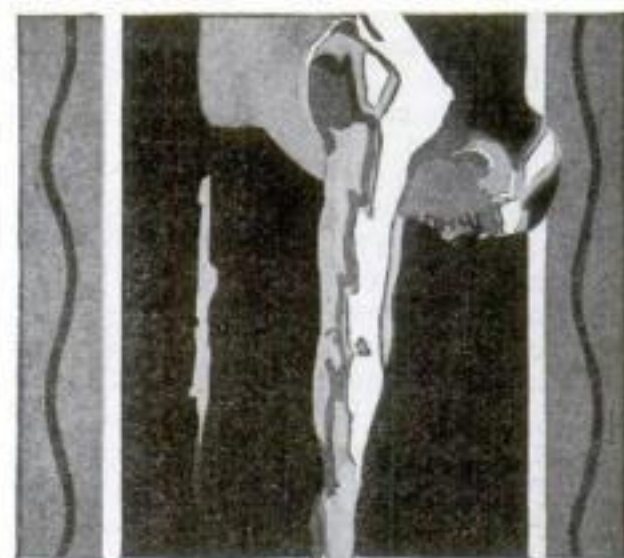

**Pal** ATHLETIC SUPPORTER

© U. S. P., 1929

Even in setting-up exercises there is danger to the delicate cords and membranes nature left so vulnerable. A quick movement—a little awkwardness—and suddenly . . . Pain . . . Disablement.

PAL is far superior to the ordinary all-elastic supporter. It is porous . . . knit of soft-covered elastic threads. A more efficient supporter . . . snug where it should be . . . comfortable all over. PAL doesn't get perspiration-stiff . . . doesn't chafe. At all drug stores . . . one dollar. {Price slightly higher in Canada.}

## Bauer & Black

A Division of the Kendall Co.

CHICAGO . . . NEW YORK . . . TORONTO  
Also makers of the famous O-P-C  
For 40 years the leading suspensory for daily wear

**AEROVOX**  
BUILT BETTER  
CONDENSERS AND RESISTORS

### Without a Doubt The Most Complete Line of Condensers & Resistors

No matter what your requirements may be in the fixed condenser or resistor field, you are sure to find an AEROVOX unit exactly suited to your needs. We shall be glad to send you our complete catalog on request.



Your name will be put on the mailing list free of charge on request.

**AEROVOX WIRELESS CORP.**  
82 Washington St., Bklyn., N. Y.  
PRODUCTS THAT ENDURE



# Why toil for small wages?

# RADIO

*offers you* **BIG PAY!**



Free Book tells how to  
Pick the Job You Want  
... Many fill it  
in only 9 Months

**S**PEED up your earning capacity ... get out of the low pay rut ... make more money than you ever made before ... in Radio—the big-money business of today. Hundreds of men just like you are earning from \$2,000 to \$25,000 a year in this giant money-making industry.

## Astounding World-Wide Opportunities Beckon To You

Be one of the fortunate men to get in on the ground floor of this big-money industry. Broadcasting stations and manufacturers are eagerly seeking capable graduates—and now nation-wide Radio telegraph service, telephony, television, photoradiograms have opened up new and amazing opportunities by the thousands!

## Magnificent Laboratory Outfit Makes It Easy To Learn At Home

You don't have to know an antenna from a vacuum tube. By means of this marvelous, simplified home-training course, sponsored by the Radio Corporation of America ... you can now prepare for success in every phase of radio. The remarkable outlay of apparatus given to you with this course ... enables you to learn by actual practice how to solve every problem in Radio work ... such as repairing, installing and servicing fine sets. That's why you, too, upon graduation can have the confidence and ability to command big money.

## Only Training Course Backed by Radio Corporation of America

Graduates of this school are always posted in newest up-to-the-minute developments in Radio. That's why they are always in big

SPONSORED BY

**RADIO INSTITUTE OF AMERICA**



If you have dash and daring ... if you long for excitement—adventure—thrills ... become a radio operator.

\$90 to \$200 a month (board free) and a chance to see the world.

A few months of expert training through this "big league" home-laboratory method prepares you for success as a broadcast operator at \$1,800 to \$4,800 a year

—or, as a radio inspector at from \$2,000 to \$4,500 a year.



demand. The progress of Radio is measured by the accomplishments of the great engineers in the huge research laboratories of the Radio Corporation of America. This gigantic corporation sets the standards for the entire industry ... and sponsors every lesson in the course.

## Money Back If Not Satisfied

This marvelous home-laboratory training practically insures your success by preparing you thoroughly in every phase of Radiomanufacturing, servicing, broadcasting, photoradiograms, television and airplane radio equipment. As a student, you will receive an agreement signed by the president of this school assuring you of complete satisfaction upon completion of your training—or your money will be instantly refunded.

# Free!

This fascinating book on Radio's glorious FREE opportunities ... written by one of America's well-known radio experts.



RADIO INSTITUTE OF AMERICA,  
Dept. P.S. 10, 326 Broadway, New York, N. Y.

Gentlemen: Please send me your FREE 50-page book which illustrates the brilliant opportunities in Radio and describes your laboratory-method of instruction at home.

Name .....

Address .....





## "He saves \$100 a month"

"SEE that man at the receiving teller's window? That's 'Billy' King, Sales Manager for The Browning Co. Every month he comes in and adds \$100 to his savings account."

"Three years ago he started at Browning's at \$25 a week. Married, had one child, couldn't save a cent. One day he came in here desperate—wanted to borrow a hundred dollars—wife was sick."

"I said, 'Billy, I'm going to give you something worth more than a loan—some good advice—and if you'll follow it I'll let you have the hundred too. Take up a course with the International Correspondence Schools and put in some of your evenings getting special training. The schools will do wonders for you, I know. We've got several I. C. S. men right here in the bank.'

"That very night Billy wrote to Scranton, and a few days later he had started studying at home. Why, in a few months he had doubled his salary! Next thing I knew he was put in charge of his department and two months ago they made him Sales Manager."

Employers are begging for men with ambition—men who really want to get ahead in the world and are willing to prove it by training themselves in spare time to do some one thing well.

Prove that you are that kind of man! The International Correspondence Schools are ready and anxious to help you prepare for something better if you will only make the start.

### Mail the Coupon for Free Booklet

#### INTERNATIONAL CORRESPONDENCE SCHOOLS "The Universal University"

Box 7641-F, Scranton, Penna.

Without cost or obligation on my part, please send me a copy of your 48-page booklet, "Who Wins and Why," and tell me how I can qualify for the position, or in the subject, before which I have marked an X:

#### TECHNICAL AND INDUSTRIAL COURSES

- |  |   |
|--|---|
| <input type="checkbox"/> Architect               | <input type="checkbox"/> Automobile Work                                    |
| <input type="checkbox"/> Architectural Draftsman | <input type="checkbox"/> Aviation Engines                                   |
| <input type="checkbox"/> Building Foreman        | <input type="checkbox"/> Plumber and Steam Fitter                           |
| <input type="checkbox"/> Concrete Builder        | <input type="checkbox"/> Plumbing Inspector                                 |
| <input type="checkbox"/> Contractor and Builder  | <input type="checkbox"/> Foreman Plumber                                    |
| <input type="checkbox"/> Structural Draftsman    | <input type="checkbox"/> Heating and Ventilation                            |
| <input type="checkbox"/> Structural Engineer     | <input type="checkbox"/> Sheet-Metal Worker                                 |
| <input type="checkbox"/> Electrical Engineer     | <input type="checkbox"/> Steam Engineer                                     |
| <input type="checkbox"/> Electrical Contractor   | <input type="checkbox"/> Marine Engineer                                    |
| <input type="checkbox"/> Electric Wiring         | <input type="checkbox"/> Refrigeration Engineer                             |
| <input type="checkbox"/> Electric Lighting       | <input type="checkbox"/> R. R. Positions                                    |
| <input type="checkbox"/> Electric Car Running    | <input type="checkbox"/> Highway Engineer                                   |
| <input type="checkbox"/> Telegraph Engineer      | <input type="checkbox"/> Chemistry  |
| <input type="checkbox"/> Telephone Work          | <input type="checkbox"/> Pharmacy   |
| <input type="checkbox"/> Mechanical Engineer     | <input type="checkbox"/> Coal Mining Engineer                               |
| <input type="checkbox"/> Mechanical Draftsman    | <input type="checkbox"/> Navigation <input type="checkbox"/> Assayer        |
| <input type="checkbox"/> Machine Shop Practice   | <input type="checkbox"/> Iron and Steel Worker                              |
| <input type="checkbox"/> Toolmaker               | <input type="checkbox"/> Textile Overseer or Supt.                          |
| <input type="checkbox"/> Patternmaker            | <input type="checkbox"/> Cotton Manufacturing                               |
| <input type="checkbox"/> Civil Engineer          | <input type="checkbox"/> Woolen Manufacturing                               |
| <input type="checkbox"/> Surveying and Mapping   | <input type="checkbox"/> Agriculture <input type="checkbox"/> Fruit Growing |
| <input type="checkbox"/> Bridge Engineer         | <input type="checkbox"/> Poultry Farming                                    |
| <input type="checkbox"/> Gas Engine Operating    | <input type="checkbox"/> Mathematics <input type="checkbox"/> Radio         |

#### BUSINESS TRAINING COURSES

- |  |   |
|--|---|
| <input type="checkbox"/> Business Management                     | <input type="checkbox"/> Business Correspondence                          |
| <input type="checkbox"/> Industrial Management                   | <input type="checkbox"/> Show Card and Sign                               |
| <input type="checkbox"/> Personnel Management                    | <input type="checkbox"/> Lettering  |
| <input type="checkbox"/> Traffic Management                      | <input type="checkbox"/> Stenography and Typing                           |
| <input type="checkbox"/> Accounting and C. P. A.                 | <input type="checkbox"/> English  |
| <input type="checkbox"/> Coaching                                | <input type="checkbox"/> Civil Service                                    |
| <input type="checkbox"/> Cost Accounting                         | <input type="checkbox"/> Railway Mail Clerk                               |
| <input type="checkbox"/> Bookkeeping                             | <input type="checkbox"/> Mail Carrier                                     |
| <input type="checkbox"/> Secretarial Work                        | <input type="checkbox"/> Grade School Subjects                            |
| <input type="checkbox"/> Spanish <input type="checkbox"/> French | <input type="checkbox"/> High School Subjects                             |
| <input type="checkbox"/> Salesmanship                            | <input type="checkbox"/> Illustrating <input type="checkbox"/> Cartooning |
| <input type="checkbox"/> Advertising                             | <input type="checkbox"/> Lumber Dealer                                    |

Name.....  
Street.....  
Address.....  
City..... State.....


Occupation.....

If you reside in Canada, send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada

## Hints on Applying Spring Hinges

PROBABLY the most familiar form of spring hinge is the screen door type shown at A, which is applied simply by holding the door in place with wedges and driving the screws.

The flange type B is another form of A; it may be used in places where the door is to be hung between the jambs of an opening. The flange may be set in a jamb as at 1, or it may be placed directly upon the face of the jamb, in which case the thickness of the flange may be cut from the door, as at 2, and the face member of the

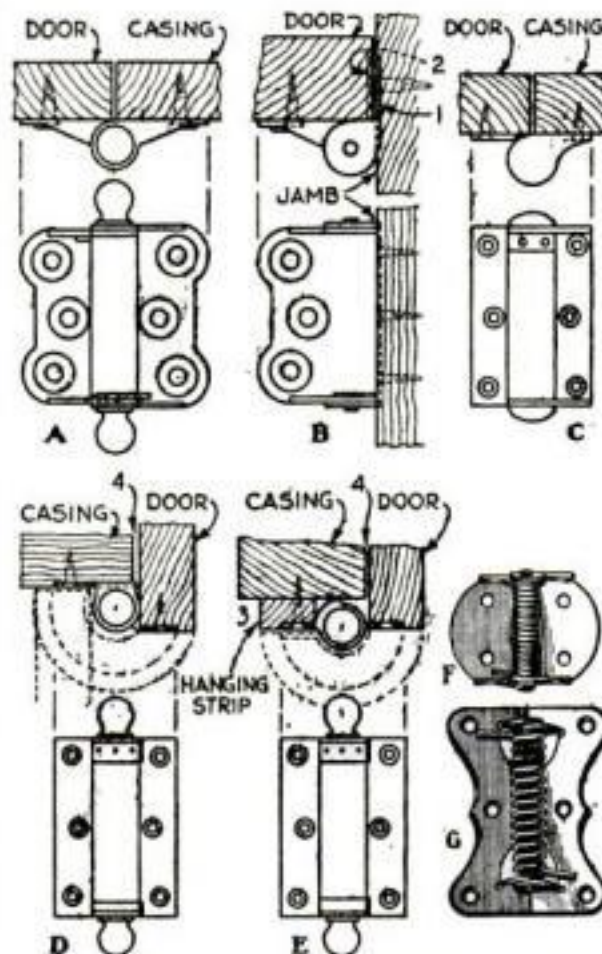

Seven types of spring hinges, and sectional views showing how five of them are attached.

hinge moved over enough to allow the door stile to fit the jamb.

The surface type at C may be used upon any door or screen stile not less than 1 in. in width. The strength of its spring may be changed by adjustment. Hinges D and E also are adjustable and may be bought in sizes ranging from 3 to 8 in. long. The flanges of D are to be fitted into the door jamb and the edge of the door, much the same as an ordinary hinge; in the case of E, a hanging strip 3, to coincide with the thickness of the door, should be fastened in place. The placing of the flange of D and the hanging strip of E will demand care, for the door should swing back against the wall as at 4.

Hinges F and G may be purchased in smaller sizes and at a lower price; they are for light work.—DAVID WEBSTER.

WHEN it becomes necessary in hanging or repairing doors to shim out a hinge with cardboard, slightly crease the shim with a knife and then fold it on the cut. The folded cardboard will spring apart when inserted behind the hinge and will therefore stay without falling out, unlike a flat piece which is likely to cause annoyance by dropping before the screws can be tightened.—AUGUST MULLER.

# Fix that Car

Learn How Easily

JIFFY INDEX in These Five New Big Auto Books Makes All Facts Instantly Available. Find Anything You Want to Know in a Moment in This Latest Edition

All Shipped FREE

5 Big Auto Books

Repair any auto fault, learn how now. You can do it easily in this new simple way. These five big automobile books are the most interesting, the most practical books we have ever published on automobile construction, operation and repairs. Brimful of facts, photographs and explanations so easy to understand that anyone can learn how to repair auto faults in almost no time. Over 2,000 pages full of diagrams, data sheets and everything else needed to make anyone an authority on automobiles. Whether you want to qualify as garage owner, auto repair expert or merely wish to know how to keep your own car 100% efficient, you will recognize the amazing value of these five big books, especially on our

### NO MONEY OFFER

A very liberal plan of distribution brings these books to you for examination without one cent of payment to us. We don't ask a cent of you, but ship the books free. Look them over, read them as much as you want to, note the splendid photographs and drawings, and then if you decide you want them, send only \$2.00 and then \$3.00 a month until only \$24.80 is paid. That is all. Nothing more to pay us. There is no further obligation.

### American Technical Society

#### Membership Free

Yes, we include a certificate of membership in the American Technical Society, which entitles you to free consultation with 18 experts for one year on any subject relating to automobile engineering. You can write or wire any time for special information. Answers will be sent promptly without cost.

### Repair Any Auto Fault

With these books you don't have to worry about auto troubles. Illustrations are so clear and explanations are so simple that anyone can understand them. All phases of automobile engineering fully covered.

### FIND FACTS QUICKLY

One of the best things about these money making books is the Jiffy Index, which puts vital facts at your finger tips. You don't have to read the books through; you don't have to spend long hours over them. This index enables you to put your finger on the information wanted in a jiffy.

### DON'T HESITATE

There are no strings to this offer—it means just what it says. Send name and address on the coupon and all of the five big books will be sent you. Remember, one fact alone may save you an expensive repair or help you to a better job.

American Technical Society, Dept. A720  
Drexel Ave. at 58th St., Chicago, Ill.

I would like to look at the five big auto books—send them on your free offer. I will pay the few cents delivery charges. If I like them I will send you \$2.00 when I have had the books fifteen days, and then \$3.00 a month until the special low price of only \$24.80 is paid. Otherwise I will return the books at your expense. You are to include, without charge, free consultation membership certificate in the American Technical Society.

Name.....  
Address.....  
Employer's Name.....  
Employer's Address.....

## Make Your VEST POCKET Bring You \$95 a Week

CARRY this amazing new adding machine in your vest pocket. Make \$3.00 an hour showing it to storekeepers, bookkeepers, professional men and others. Agents cleaning up with this fast seller. Everyone who does any kind of figuring needs it and will buy on sight.

### Complete Adding Machine Only \$2.95

VE-PO-AD duplicates work of large adding machines. Sells for only \$2.95. Adds, subtracts, multiplies—in a jiffy. Always accurate—no extra cost of order. Over 200,000 in use. You make 100% profit on every sale. Man! If you ever had a chance to CLEAN UP BIG MONEY—here it is!

### Sample Ve-Po-Ad FREE

You don't need experience. Shapiro made \$175 his first week. Others make \$50 to \$100 a week regularly. You can sell as many as 5 Ve-Po-ADs an hour—over \$4.00 clear profit for you. Grasp this quickly! Write at once for full details of FREE Ve-Po-Ad offer and my MONEY-MAKING PLAN. Do it NOW.

C. M. CLEARY

173 W. Madison St., Dept. 157 Chicago, Ill.





## Testing Defective Electric Cords

Paste this Home Workshop Reference Sheet, including the head above, in your scrapbook in the section marked *electricity*. (October, 1929, POPULAR SCIENCE MONTHLY.)

*How can I find what is wrong with the cord of an electric lamp or appliance?*

THE answer to this question must be divided into two parts, with reference to the additional questions: Does a fuse blow out when the cord is connected to

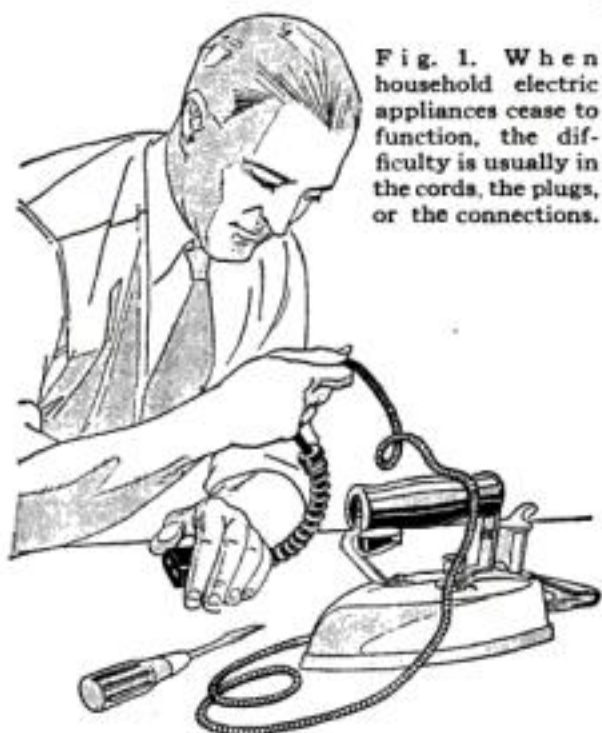


Fig. 1. When household electric appliances cease to function, the difficulty is usually in the cords, the plugs, or the connections.

the circuit? Does the fuse remain intact, but the appliance fail to function?

The blowing of the fuse denotes a short circuit, either in the connections at the end of the cord or perhaps in the lamp or appliance itself.

If the fuse does not blow when the connection is made, yet the lamp or appliance will not operate, the chances are that there is an open circuit somewhere in the cord, in the connections at the ends, or possibly in the lamp or appliance. An open circuit is a condition where the path for the current has been opened or interrupted.

*What are the tests for locating a short circuit?*

PROCEED first to the most common cause—the attachment plug on the end of the cord. Here lies probably seventy-five percent of all cord troubles. Examine carefully the wires leading to the contact screws. Is the insulation in good shape right up to each screw head? Are there any stray strands of copper wires that reach over to the other point or screw? If a knot is tied in the wires, un-

# How I Made \$100,000 With a "Fool" Idea

*Learn my money-making secret—Be a Real Estate Specialist—Start at home, in your spare time—Use my successful System—Free book shows how.*

"IT'S a fool idea!" That's what my friends said, when I told them about my idea for starting a real estate business "on the side." But with that "fool" idea I made more than one hundred thousand dollars net profit. No matter who you are, where you are, or what your sex or present occupation, if you want to do what I did—if you want to get out of the \$25-a-week crowd and build up a high-class money-making business of your own—right at home—in your spare time—send at once for my free book which opens wide the door of the biggest and best money-making business opportunity you ever heard of in your whole life.

## Use My Successful System

When I started in real estate, I tossed overboard all the hit-or-miss, haphazard, rule-of-thumb methods of the past, and put into operation a system of my own which is as superior to the old way as the modern Mazda lamp is superior to the tallow candle of our forefathers.

With little education—no experience—no influence—and less than five dollars capital—I started in my spare time and met with instant success.

If you want to follow in my footsteps—if you want to use my amazingly successful system—send for my free book now. It tells how I succeeded—how I have helped other men and women win big success—how you, too, can succeed—how you can have a splendid business of your own and make more money than you ever made before.

## A Wonderful Business

Real estate—conducted my way—is a great business. It is as permanent as the earth itself. It is getting bigger and bigger as the country grows. It doesn't require years of study to learn, like most other businesses and professions. It offers enormous earnings to ambitious men and women. Users of my system are making \$1,000—\$5,000—\$10,000 on single deals—as much as the average man gets for months and years of hard work. And the busi-



A well-known Cartoonist's conception of my idea

ness is practically unlimited. Ten million properties are now on the market for rent, sale or exchange. And you can start with little or no capital—right at home—in your spare time. I did. So did others. So can you. My free book tells you how.

## Read These Records

Here are just a few brief extracts from the many letters received from happy users of my money-making real estate system:

"Made \$5,500 on first deal after getting your system."—Mrs. Evalynn Balster, Illinois. (Former School Teacher.) "Sold a lot by your methods in less than one

hour and my commission was \$800."—J. A. Ferguson, Florida. (Former Dry Cleaner.) "Sold over \$100,000 worth of property my first year with your methods."—H. D. Van Houten, New Jersey. (Former Grocery Clerk.) "Have sold thousands of dollars worth of property your way. Have deals that will go beyond the \$300,000 mark."—Carrie Marshall, Mississippi. (Former Housekeeper.) "My first day's work in real estate netted me \$435. I recommend your system to anyone wishing to get into a pleasant and profitable business."—F. B. Bennett, California. (Former Traffic Manager.) "Have sold one \$5,000 lot and 3 houses so far, with your system."—Mrs. B. H. Morehouse, New York. (Former Housewife.)

These are just a few samples of success that you will read about in my free book. Get it. Read it. Follow its instructions. Make big money my way.

## Get Free Book Now

My big, new illustrated book is filled with fascinating facts about my kind of a real estate business—what I did—what others are doing—what you can do.

Mail coupon right now and get this valuable, money-making information free. It doesn't cost you a nickel to find out what this book can do for you. So, act at once. You will never forgive yourself if you turn your back on this unusual chance to win big business success. Address PRESIDENT, American Business Builders, Inc., Dept. K-34, 205 East 42 Street, New York City.

## MAIL COUPON



for FREE BOOK

PRESIDENT, American Business Builders, Inc.  
(Incorporated 1917—Capital \$100,000)

Dept. K-34, 205 East 42 Street, New York City

Mail me your free book telling how you made \$100,000 in a new kind of real estate business—how others are making big money—and how I can do the same.

Name..... Print or write plainly

Address.....

City..... State.....



# Learn Aviation the One and Only Right Way

**Practical Experience Is All That Counts**

To learn flying, you must actually fly. To learn aviation mechanics, you must actually work on planes and motors. In Universal Aviation Schools you get the practical training that counts as well as the theoretical instruction. Universal flight and ground courses are probably the strictest in the country. But they teach you what you need to know.



**Universal Training Is Exceptionally Thorough**



When you complete a Universal flying, mechanic's or welding course, you are immediately placed in a position to put yourself on a money-making basis. Universal graduates are making good on highly paid jobs all over the United States. Their thorough training prepared them to grasp big opportunities when offered.

**Prepare Now for Next Spring's Opportunities**

Year around training is available in Universal Aviation Schools. Start your training at once and become a full-fledged licensed pilot in the Spring. Or begin your ground school training now and be ready to step into this fast growing industry early in the year. Take the first step toward getting into aviation by mailing the coupon below.



**Get the Facts—Clip the Coupon**

Inspect your nearest Universal School. Or, if not convenient, mail coupon for the picture story of Universal Schools as accurately given in the book, "Aviation—What It Means To You." Your copy, sent free if you clip the coupon, fill in and mail.

## Universal Aviation Schools

Universal Flying School . . . St. Louis, Mo.  
Universal Flying School . . . Minneapolis, Minn.  
Universal Flying School . . . Marion, Ill.  
Universal Flying School . . . Oklahoma City, Okla.  
Universal Flying School . . . Rochester, Minn.  
Universal Flying School . . . St. Paul, Minn.  
Universal Flying School . . . Memphis, Tenn.  
Universal Flying School . . . Cleveland, Ohio.  
Universal Flying School . . . Wichita, Kansas  
Porterfield Flying School, Kansas City, Kansas

**Division Universal Aviation Corporation**  
Gov't rating applied for by all Universal Flying Schools



**Universal Aviation Schools**  
Suite 1046-55 Boatmen's Bldg.  
St. Louis, Mo.

Please send me at once your free book, "Aviation—What It Means To You." I am interested in:

☐ Flying Course ☐ Aviation Mechanic's Course  
☐ Business Course


Name.....Age.....

Address.....

City.....State.....N330

tie it and see that the insulation is good within the folds of the knot.

Next run your fingers along the entire length of the cord, feeling for worn places, perhaps poorly repaired with tape (Fig. 1). Follow the cord up to the point where it enters the lamp or appliance. Is there a smooth bushing protecting the thin insulation (outer covering) of the cord, or is there a rough-edged hole and does the cord look frayed and questionable at that

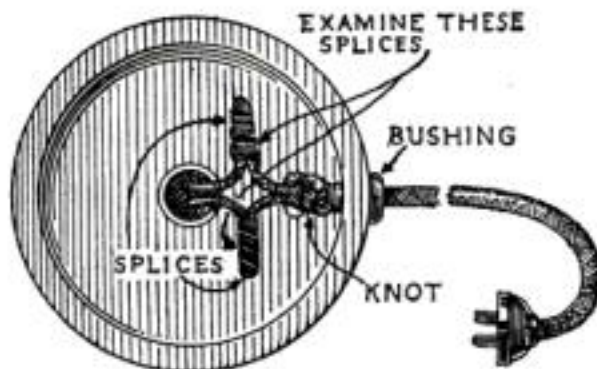

**BOTTOM VIEW OF LAMP**

Fig. 2. In testing a table or floor lamp, turn it up and inspect the cord, knot, and splices.

point, with perhaps a glimpse of the copper showing?


In the case of a lamp, turn it bottom side up and, if there are splices made in the base, see that they are well made and properly taped. Be sure that the tape turns over the end of the joint, protecting it well (Fig. 2).

If an appliance is in question, such as an iron, toaster, or vacuum cleaner, the method of connecting the cord to it must be inspected. Irons and similar devices generally use a composition attachment plug which is made in two halves, clamped together by two small bolts. This plug, which pushes on over two prongs in the base of the iron or toaster, is often at fault, and should be inspected. Loosen the screws that pass through the plug and open the two halves. You will find a spring contact piece attached to the end of each wire by a short screw. Look for burnt or damaged insulation, with possibly the two wires twisted tightly together; also inspect the cord for injury where it left the end of the strain spring. The wires in this type of plug usually lie in separate grooves molded in the composition for them. See that they are correctly placed there when you assemble the plug, or the halves will not fit together again.

**How is an open circuit hunted?**

**I**N MUCH the same way. Start at the plug on the end of the cord and look for a broken wire or loose connection under the screw. Next follow the cord its full length as before, feeling it for a "limp" spot, which may indicate a break.

These checks having been made without results, next test the cord in the fol-

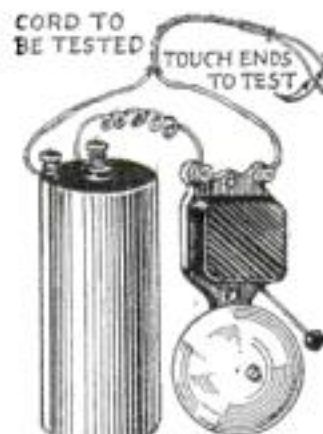

**SERIES CONNECTED BELL AND BATTERY**

Fig. 3. Doorbell and battery for testing.

# SPARE TIME TRAINING that leads to BIGGER PAY

Do you want a better position and a higher salary? You can have these if you can do the work. LaSalle experts will show you how, guide you step by step to success and help solve your personal business problems through the time-saving LaSalle Problem Method. Our salary-increasing plan enables you to prepare during your spare hours, without interference with your present duties. Simply mark on the coupon the field in which you desire success, and we will mail you a valuable book describing the opportunities in that field, together with an outline of our salary-increasing plan. Also copy of "Ten Years' Promotion in One." There is no cost or obligation. Find out how the salary-increasing plan starts average men and women on the high road to success and financial independence. Check and mail the coupon NOW.

— Find Yourself Through LaSalle —

**LA SALLE EXTENSION UNIVERSITY**

The World's Largest Business Training Institution

Dept. 1083-R Chicago

Tell me about your salary-increasing plan for my advancement in the business field checked. Send also copy of "Ten Years' Promotion in One," all without obligation.

☐ Business Management ☐ Personnel Management

☐ Modern Salesmanship ☐ Expert Book-keeping

☐ Higher Accountancy ☐ Business English

☐ Traffic Management ☐ Commercial Spanish

☐ Railway Station Mgmt ☐ Effective Speaking

☐ Railway Accounting ☐ C. P. A. Coaching

☐ Law—Degree of LL.B. ☐ Stenotypy

☐ Commercial Law ☐ Telegraphy

☐ Industrial Management ☐ Credit and Collection Correspondence

☐ Banking and Finance ☐ Modern Business Correspondence

☐ Modern Foremanship

Name.....

Present Position.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....

Address.....



lowing manner: Obtain an ordinary electric door bell (borrow one from off the kitchen wall, if necessary) and a dry cell, and connect them together in series as illustrated in Fig. 3. Test the bell to be sure it rings. Now attach the two wire ends at one end of the cord as shown, one to the free post on the bell and the other to the free post on the battery. Touch together the ends at the other end of the cord.


If the cord is all right, the bell will ring. If it does not and you are sure that your tester is connected as described, keep the free ends at the farther end of the cord touching each other and bend the cord between the fingers very slowly along its length. If there is a break somewhere, it will probably come together by this treatment and the bell will ring.

When the break has been found, if it is quite near either end, the cord may be cut off there and reconnected, but if it is in the center somewhere, do not try to repair it unless for temporary purposes. A repaired cord is seldom satisfactory; in fact, it is prohibited by the electric inspectors in many cities as unsafe. The price of new cord is low and is a good investment in replacing worn or broken cords that might cause a serious fire at any time.—HAROLD P. STRAND.

### How to Make Small Pulleys for Model Work

**S**MALL brass pulleys sometimes are needed for curtains, for yacht models, and for other uses. To make them, shape a piece of scrap brass as indicated. Drill a hole through one end, fold the piece end to end, and drill a matching hole through the other end. For the sheave use the terminal nut from an old electric dry cell after filing down the thicker side; mount it on a piece cut from a wire nail. Bend the ring from brass wire and attach it firmly with thinner wire. Solder the ring and the spindle in place, and the pulley is made.

—J. G. PRATT.

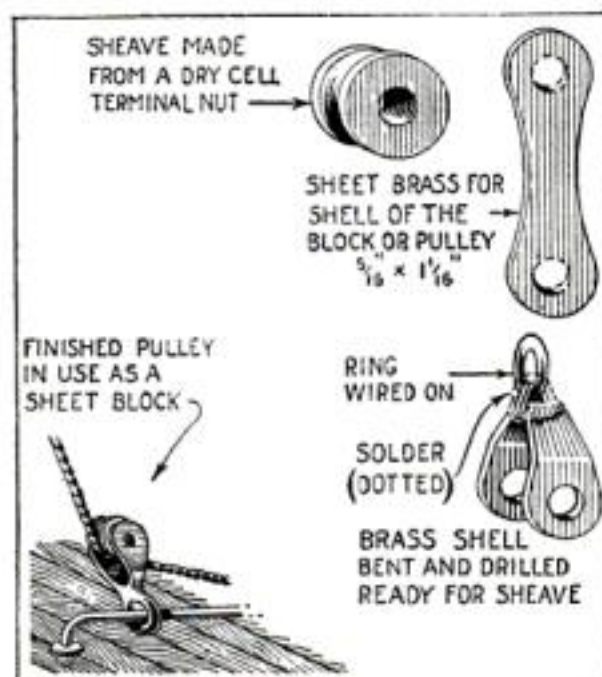

Small homemade brass pulley for use on a yacht model, and its parts before being assembled.



## Will You Be Farther Ahead Three Years From Today?

**O**R will you have lagged behind? These questions are not asked idly, for we offer you opportunity, and assistance in securing a better education. Columbia University unhesitatingly asks such questions to stimulate thought and action, and to urge well directed study upon all intelligent people.

Every one moves ahead or drops behind. Study never ends; learning never stops; mental training should be carried on throughout a vigorous, abundant life.

Every year more people study at home in their leisure time. Increased earning capacity is the objective that many are attaining. But whether the attainment be greater efficiency in business, or a more interesting social life, or the real joy of developing a more intelligent point of view, the studies that lead to these attainments are available, wherever one lives, through Columbia Home Study Courses. The range of subjects is wide.

## COLUMBIA UNIVERSITY

Offers Home Study Courses of University Grade in the Following Subjects

Accounting	Various Languages	Italian
Algebra	Lyric Poetry	Juvenile Story Writing
American Government	Contemporary Novel	Latin
American History	Drafting	Library Service
American Literature	Drama	Literature
Applied Grammar	Drawing and Painting	Magazine Article Writing
Astronomy	Economics	Marketing
Banking	Economic Geography	Mathematics
Biblical Literature	English	Personnel Administration
Biology	English Literature	Philosophy
Botany	Essay Writing	Photoplay Composition
Boy Scouting	European History	Physics
Business Administration	Fire Insurance	Psychology
Business English	French	Psychology in Business
Business Law	Geometry	Public Speaking
Business Mathematics	German	Religion
Business Organization	Government	Secretarial Studies
Chemistry	Grammar	Short Story Writing
Child Psychology	Greek	Slide Rule
Classics	Harmony	Sociology
Composition	High School Courses	Spanish
Dramatic	History	World Literature, etc., etc.
English	Investments	

**I**N this country we are in the midst of an adult education movement. University home study courses are one of the important factors in this progressive movement, for they offer expert guidance under educators qualified to direct.

Our courses have been prepared by our instructors to meet the special requirements of study at home. While all basic material essential to the full understanding of each subject is fully covered, sufficient elasticity is allowed to permit adaptation to the individual needs of the student. Everyone who enrolls for a Columbia course is personally taught by a member of the University teaching staff. Special arrangements can be made for group study.

The University will send on request full information about these home study courses. A coupon is printed below for your convenience. If you care to write a letter briefly outlining your educational interests, our instructors may be able to offer helpful suggestions. Mention subjects which are of interest to you, even if they are not listed here, additions to the courses offered are made from time to time.

### HIGH SCHOOL AND COLLEGE PREPARATORY COURSES

**C**OLUMBIA University Home Study Department has prepared courses covering the equivalent of four years of High School study. This complete High School or College Preparatory training is available to those who can not undertake class room work. We shall be glad to send you our special bulletin upon request.

COLUMBIA UNIVERSITY, University Extension—Home Study Department, New York N. Y. Please send me full information about Columbia University Home Study Courses. I am interested in the following subject:

Pop. Sci.-10-29

Name.....

Street and Number.....

City.....State.....Occupation.....

2358



# Half a Million People have learned music this easy way

You Too, Can Learn to Play Your  
Favorite Instrument Without  
a Teacher

## Easy as A-B-C


MANY of this half million didn't know one note from another—yet in half the usual time they learned to play their favorite instrument. Best of all they found learning music *amazingly easy*. No monotonous hours of exercises—no tedious scales—no expensive teachers. This simplified method, perfected by the U. S. School of Music, made learning music as easy as A-B-C!

From the very start you are playing *real* tunes perfectly, by *note*. Every step, from beginning to end, is right before your eyes in print and picture. First you are told how to do a thing, then a picture shows you how, then you do it yourself and *hear* it. And almost before you know it, you are playing your favorite pieces—jazz, ballads, classics. No private teacher could make it clearer. The cost is surprisingly low—averaging only a few cents a day—and the price is the same for whatever instrument you choose.

### LEARN TO PLAY BY NOTE

Mandolin Saxophone  
Piano 'Cello  
Organ Ukulele  
Violin Cornet  
Banjo Trombone  
Or Any Other Instrument

Learn now to play your favorite instrument and surprise all your friends. Change from a wall-flower to the center of attraction. Musicians are invited everywhere. Enjoy the popularity

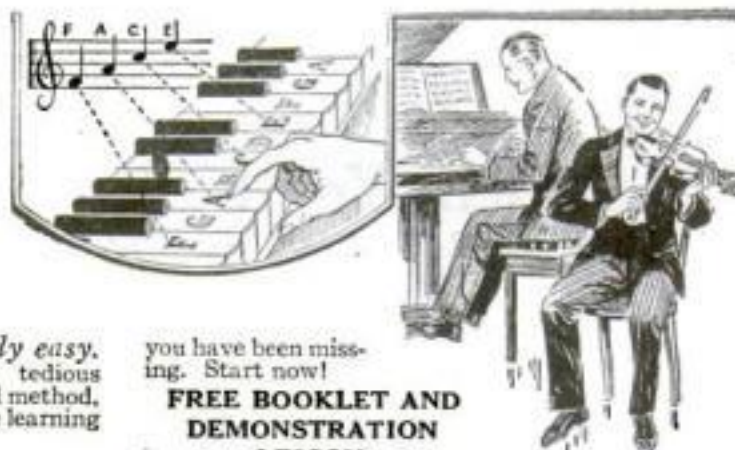

you have been missing. Start now!

### FREE BOOKLET AND DEMONSTRATION LESSON

If you really *do* want to play your favorite instrument, fill out and mail the coupon asking for our Free Booklet and Free Demonstration Lesson. These explain our wonderful method fully and show you how easily and quickly you can learn to play at little expense. Instruments are supplied when needed—cash or credit. U. S. School of Music, 810 Brunswick Bldg., New York City.

U. S. SCHOOL OF MUSIC,  
810 Brunswick Bldg., New York City

Send me your amazing free book, "Music Lessons in Your Own Home," with introduction by Dr. Frank Crane; also Free Demonstration Lesson. This does not put me under any obligation.

Name.....

Address.....

Instrument..... Have you this inst?.....

## How to Work with Tools and Wood

This book explains in a simple, straightforward manner all the processes of working with tools and wood. It takes all the mystery out of using tools and enables you to spend many interesting and profitable hours in your home workshop. All details are clearly explained.

Price \$1.00

Popular Science Monthly

381 Fourth Avenue

New York City

## WORLD NEEDS PLUMBERS

Old style plumbers are fading like the horse and buggy. The world demands modern Plumbing and Skilled Trained Mechanics to do it. Unlimited, swift growing field. Make \$50 to \$100 a week or start own shop. We train you quick. Learn in 8-12 WEEKS to do any job with skill and science. Need no previous experience. Strictly tool-using system. Opportunity knocks. Investigate today—amazing offer—low tuition. World's greatest school. Write—

UNIVERSAL PLUMBING SCHOOL  
2131 Troost Ave. Kansas City, Mo.

## AIRPLANE DRAFTING

### THOUSANDS OF MEN

will make fortunes in Aviation. Airplane Drafting and Designing are the biggest jobs ahead in this fastest growing industry. A new field of opportunity for you is opened in our improved method of training.

EASY TO LEARN. STUDY AT HOME. PAY AS YOU GO. EMPLOYMENT SERVICE.

Write for booklet outlining courses in Airplane Drafting and other aviation subjects, including the famous Weem's System of Navigation—endorsed by Col. Lindbergh, Commander Byrd, Lincoln Ellsworth, Admiral Moffett, etc.

Name.....

Address.....

City.....State.....

☐ AIRPLANE DRAFTING

☐ AIRPLANE  
MOTORS

☐ AIRPLANE  
MECHANICS

PACIFIC TECHNICAL UNIVERSITY SAN DIEGO CALIFORNIA

## Six Helpful Hints for the Home Mechanic

LIKE many of those who are motorizing their home workshops, I needed a pulley shaft to use with a 1/4-H.P. motor. Finding that one would be somewhat expensive, I visited a garage junk pile and obtained parts for constructing an entirely satisfactory shaft, as shown in Figs. 1 and 2.

The shaft is the steering shaft from



Fig. 1. This countershaft for light work is merely a junked steering shaft from a small car, and the bearings are old connecting rods.

any small automobile (I used a Chevrolet steering shaft). The bearings are connecting rods of either a Chevrolet or a Ford, or any kind of rods that have a bolt in the head (mine are from a Ford). If the shaft is to be very long, a third rod may be used in the center and fastened against the wall at right angles to the other two, as indicated in Fig. 2.

It will be noticed that the bolt in the top of the connecting rod extends partly into the hole. Far from hindering you

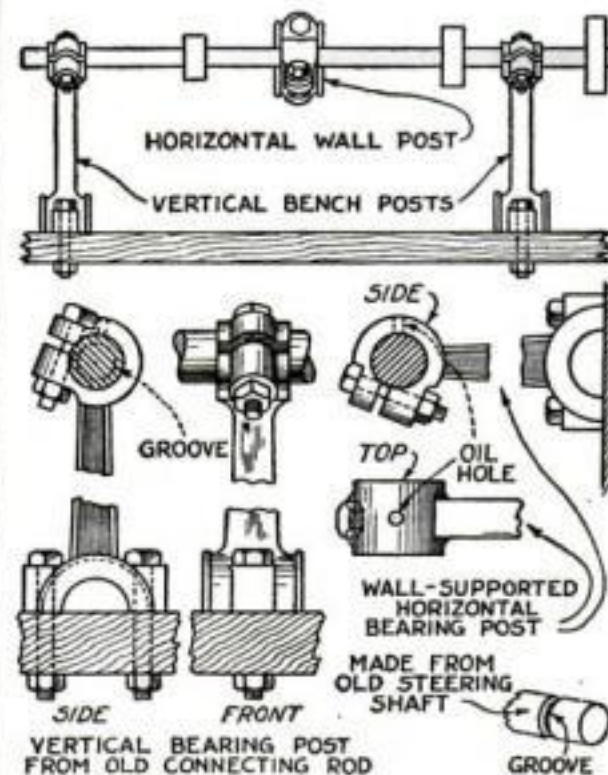


Fig. 2. The complete countershaft and details showing how the connecting rods are used.



## Styled On Fifth Avenue— TIES & SHIRTS PAY BIG

### MAKE STEADY MONEY

weekly selling this combined line. Public Service offers the best money-maker in the country for full time or spare time workers.

Splendid Fifth Ave. Styled shirts. Beautiful fabrics to satisfy every taste. Sell on sight to men and women at factory prices. Biggest assortment in the business. Collect your commissions in advance. Finest new Fall Outfit FREE. Start earning more money at once. Write TODAY.

PUBLIC SERVICE MILLS, Inc.  
4941-G Hudson Blvd., North Bergen, N. J.  
Canadian Office, 110 Dundas St., London, Ontario, Canada

## Young outdoor men wanted



To a few sturdy young men—lovers of fresh air and sunshine—who want to get away from the grind of indoor work—John Davey's national organization, The Davey Tree Expert Company, offers an exceptional opportunity. Steady expansion is creating a limited number of openings. Those young men selected will be thoroughly trained by the Company and given a permanent position if they make good. If you are single, between 20 and 30 years of age, free to travel, healthy, industrious, having a good practical education, and able to furnish satisfactory references, you have a good chance to qualify. Pay is good at start, advancement assured on merit. We want only men who desire permanent employment in a growing organization and will accept only clean, sturdy young men, thorough Americans, not afraid of vigorous outdoor work. Write for additional information and qualification blank to serve in place of personal interview. The Davey Tree Expert Co., Inc., 321 Federal Bldg., Kent, Ohio.



from putting the shaft in, this will be a help. With a round file, make a groove all the way around the shaft at each end where you are going to place a connecting rod, and be sure to have it deep and wide enough. In the top of each bearing drill a  $\frac{1}{8}$ -in. oil hole.

Now you are ready to mount the shaft. Put the bolts in and tighten them up until there is no play but still the shaft turns easily. Place the shaft on the bench or wherever you are going to mount it, and mark the locations of the bolt holes.

After you have the shaft permanently fastened, you may find that it does not run freely. Simply attach your motor to the shaft and start it running. In each of the oil holes place a small amount of valve grinding compound or other abrasive and run it this way for about ten minutes. Then clean out the bearings with gasoline and place oil or grease in them.

The bearings will last indefinitely, as you can tighten them up when they become the least bit loose—a distinct advantage.—JAMES SUDDETH.

**A** METAL worker, inconvenienced by the loss of his acid brush while doing some soldering away from the shop, made

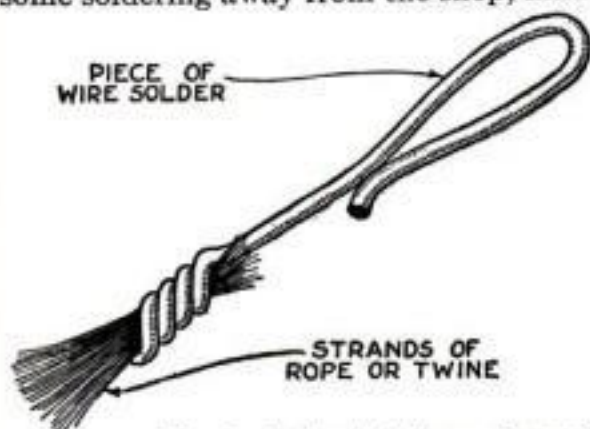


Fig. 3. A brush that can be made quickly for applying soldering acid.

a noncorroding brush in a few minutes from a short piece of wire solder and a few strands of rope or heavy twine, as shown in Fig. 3.—G. E. HENDRICKSON.

**M**ADE for office work, the old-fashioned letterpress shown below is something that every amateur cabinet-maker would do well to have. Presses of this type often can be had for a song either from the original owners, who, of course, now have no use for them, or from junk dealers or even secondhand stores.

The one illustrated was purchased from the Post Office Department for 50



Fig. 4. For veneering and clamping small glued work, an old letterpress is excellent.

## When Thomas Edison groped in the dark

**I**N 1859 Edison was a newsboy on the trains in and out of Detroit. He spent every hour he could spare in the public library "grappling bravely with a certain section, and trying to read it through consecutively, shelf by shelf, regardless of subject."

Admirable determination! Edison was destined to be well read, just as he was destined to become the greatest inventor



of all time. But his early desire for fine reading was a blind groping in the dark. The books in a modern public library would take fifty lifetimes to read!

## Now everyone can be well read

Just as America's greatest inventor brought light into the world through the great medium, electricity—America's greatest educator brought light to everyone through the medium of good reading. Dr. Charles W. Eliot, from his lifetime of study, selected the

pure gold from the world's literature. Into a single set he assembled the essentials of a liberal education, the books that everyone must know to be well read. In the Five-Foot shelf are the carefully selected writings of 302 immortal authors.

### DR. ELIOT'S FIVE-FOOT SHELF OF BOOKS

(The Harvard Classics)


Carlyle once said, "If time is precious, no book that will not improve by repeated readings deserves to be read at all." Time nowadays is more precious than ever before. We cannot, like the young Edison, attack the countless shelves of public libraries. Probably none of us possesses the persistency and patience which guided his early reading. We must have only the really great literature, the books that make us think straight, talk clearly and increase both our power to succeed and our enjoyment of life.

The Harvard Classics answer these requirements to the last detail. Already they are read and cherished in thousands of cultured homes. "Reading," as Edison himself says, "will never take the place of doing, but it enables us to travel twice as far with half the effort."

By the famous Collier plan these wonderful books are brought within easy reach of everyone. Do not put off finding out more about this invaluable set.

Mail the coupon today!

### This Famous Booklet FREE



Before you spend another penny for books, get a copy of "Fifteen Minutes a Day"—the famous booklet that tells how to turn wasted minutes into growth and increased power. It's ready and waiting for you. Sending for it does not obligate you in any way.

P. F. Collier & Son Company  
250 Park Avenue New York City

By mail, free, send me the booklet that tells all about the most famous library in the world describing Dr. Eliot's Five-Foot Shelf of Books (The Harvard Classics), and containing the plan of reading recommended by Dr. Eliot. Also please advise how I may secure the books by small monthly payments.

Mr. }  
Name Mrs. }  
Miss }  
Address.....



7139 HCLB





## The Boss Didn't Even Know My Name

"HE SAID my face was more or less familiar and he remembered seeing me around, but he didn't even know my name until the I. C. S. wrote him that George Jackson had enrolled for a course of home study and was doing fine work."

"Who's George Jackson?" he asked. Then he looked me up. Told me he was glad to see I was ambitious. Said he'd keep his eye on me."

"He did too. Gave me my chance when Frank Jordan was sent out on the road. I was promoted over older men who had been with the firm for years."

"My spare-time studying helped me to get that job and to keep it after I got it. It certainly was a lucky day for me when I signed that I. C. S. coupon."

How much longer are you going to wait before you take the step that will bring you advancement and more money?

It takes only a moment to mark and mail this coupon and send it to the International Correspondence Schools at Scranton. Isn't it better to do this today than to wait a year or five years and then wish you had?

### Mail the Coupon for Free Booklet

#### INTERNATIONAL CORRESPONDENCE SCHOOLS

"The Universal University"

Box 7644-F, Scranton, Penna.

Without cost or obligation on my part, please send me a copy of your 48-page booklet, "Who Wins and Why," and tell me how I can qualify for the position, or in the subject, before which I have marked an X:

#### TECHNICAL AND INDUSTRIAL COURSES

- |  |  |
|--|--|
| <input type="checkbox"/> Architect               | <input type="checkbox"/> Automobile Work           |
| <input type="checkbox"/> Architectural Draftsman | <input type="checkbox"/> Aviation Engines          |
| <input type="checkbox"/> Building Foreman        | <input type="checkbox"/> Plumber and Steam Fitter  |
| <input type="checkbox"/> Concrete Builder        | <input type="checkbox"/> Plumbing Inspector        |
| <input type="checkbox"/> Contractor and Builder  | <input type="checkbox"/> Foreman Plumber           |
| <input type="checkbox"/> Structural Draftsman    | <input type="checkbox"/> Heating and Ventilation   |
| <input type="checkbox"/> Structural Engineer     | <input type="checkbox"/> Sheet-Metal Worker        |
| <input type="checkbox"/> Electrical Engineer     | <input type="checkbox"/> Steam Engineer            |
| <input type="checkbox"/> Electrical Contractor   | <input type="checkbox"/> Marine Engineer           |
| <input type="checkbox"/> Electric Wiring         | <input type="checkbox"/> Refrigeration Engineer    |
| <input type="checkbox"/> Electric Lighting       | <input type="checkbox"/> H. B. Positions           |
| <input type="checkbox"/> Electric Car Running    | <input type="checkbox"/> Highway Engineer          |
| <input type="checkbox"/> Telegraph Engineer      | <input type="checkbox"/> Chemistry                 |
| <input type="checkbox"/> Telephone Work          | <input type="checkbox"/> Pharmacy                  |
| <input type="checkbox"/> Mechanical Engineer     | <input type="checkbox"/> Coal Mining Engineer      |
| <input type="checkbox"/> Mechanical Draftsman    | <input type="checkbox"/> Navigation                |
| <input type="checkbox"/> Machine Shop Practice   | <input type="checkbox"/> Assayer                   |
| <input type="checkbox"/> Toolmaker               | <input type="checkbox"/> Iron and Steel Worker     |
| <input type="checkbox"/> Patternmaker            | <input type="checkbox"/> Textile Overseer or Supt. |
| <input type="checkbox"/> Civil Engineer          | <input type="checkbox"/> Cotton Manufacturing      |
| <input type="checkbox"/> Surveying and Mapping   | <input type="checkbox"/> Wooden Manufacturing      |
| <input type="checkbox"/> Bridge Engineer         | <input type="checkbox"/> Agriculture               |
| <input type="checkbox"/> Gas Engine Operating    | <input type="checkbox"/> Fruit Growing             |
|  | <input type="checkbox"/> Poultry Farming           |
|  | <input type="checkbox"/> Mathematics               |
|  | <input type="checkbox"/> Radio                     |

#### BUSINESS TRAINING COURSES

- |  |  |
|--|--|
| <input type="checkbox"/> Business Management     | <input type="checkbox"/> Business Correspondence |
| <input type="checkbox"/> Industrial Management   | <input type="checkbox"/> Show Card and Sign      |
| <input type="checkbox"/> Personnel Management    | <input type="checkbox"/> Lettering               |
| <input type="checkbox"/> Traffic Management      | <input type="checkbox"/> Stenography and Typing  |
| <input type="checkbox"/> Accounting and C. P. A. | <input type="checkbox"/> English                 |
| <input type="checkbox"/> Coaching                | <input type="checkbox"/> Civil Service           |
| <input type="checkbox"/> Cost Accounting         | <input type="checkbox"/> Railway Mail Clerk      |
| <input type="checkbox"/> Bookkeeping             | <input type="checkbox"/> Mail Carrier            |
| <input type="checkbox"/> Secretarial Work        | <input type="checkbox"/> Grade School Subjects   |
| <input type="checkbox"/> Spanish                 | <input type="checkbox"/> High School Subjects    |
| <input type="checkbox"/> French                  | <input type="checkbox"/> Illustrating            |
| <input type="checkbox"/> Salesmanship            | <input type="checkbox"/> Cartooning              |
| <input type="checkbox"/> Advertising             | <input type="checkbox"/> Lumber Dealer           |

Name.....  
Street.....  
Address.....  
City..... State.....

Occupation.....  
If you reside in Canada, send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada

## Learn AVIATION WHERE LINDBERGH STARTED!

### GET TRAINING THAT ASSURES SUCCESS!

Come to Lincoln—one of the largest, best-known and finest-equipped civilian aviation schools in this country. We trained Lindbergh (our FREE Literature tells the story). Complete, practical courses in flying, aircraft building, airplane mechanics, welding and aerial radio. Instructors and training planes approved by the Aeronautical Division of the U. S. Dept. of Commerce. Write for FREE Literature today.

**LINCOLN AIRPLANE SCHOOL**  
214 Aircraft Bldg. Lincoln, Nebr.

cents. Its capacity is  $4\frac{1}{2}$  by 16 by 20 in., and it is excellent for veneering or clamping up glued work. The upper or traveling part will tilt several degrees, thereby taking tapered work as well as flat. A patch may be clamped perfectly in any part of a board not wider than the press.

There are thousands of these presses lying around waiting to be put to work. In my small town there are two other larger ones of which I know and a dozen or more smaller copying presses.—R. C. STANLEY.

THE T-square illustrated in Fig. 5 has been found useful in making small sketches or drawings in the shop directly upon a sheet of paper attached to a pad. This permits making carbon copies.

The square blade was made from a piece of an old wooden ship curve  $\frac{1}{16}$  in. thick, and the head from  $\frac{1}{4}$  in.-thick

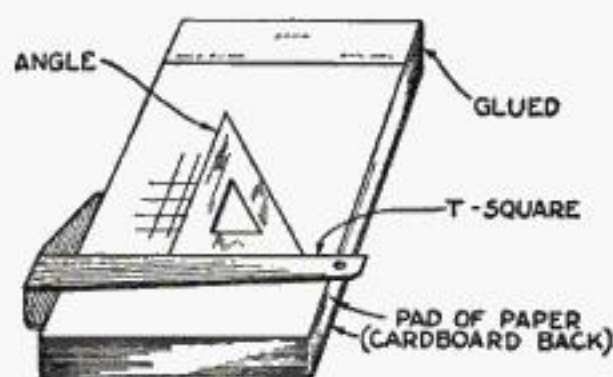


Fig. 5. A shop sketching outfit, consisting of a pad, a homemade T-square, and a triangle.

mahogany, but any close-grained woods will do.

A pair of small triangles, 6 in. for the 45-degree and 8 in. for the 30-60-degree, complete the set.—W. E. PATRICK, JR.

INSTEAD of keeping miscellaneous screws, bolts, nails, and other hardware in a drawer or a box, from which




Fig. 6. A bag for nails, screws, and small parts, which can be spread flat on the bench to sort the contents.

they have to be emptied upon the bench for sorting, one home mechanic uses oil-cloth containers made as shown in Fig. 6. Each of these consists of a square of oil-cloth provided with straps by which it can be hung on a nail or hook. Small articles may be dropped into them while they are suspended, and their entire contents can be sorted over by spreading them on the bench.—G. E. HENDRICKSON.

FOR locating broken connections within a radio set, inspecting the internal mechanism of models, and similar work, a tiny mirror on a long handle such as dentists use is a valuable tool. It will often save the work of disassembling intricate parts which interfere with direct vision.—J. B.

# WAKE UP!



## Amazing Opportunities in ELECTRIC REFRIGERATION

WHY look for big pay in crowded industries? Get into the newest and fastest growing industry in America—Electric Refrigeration. Millions of dollars being invested by Wall Street in factories and advertising. Urgent need for scientifically trained men in manufacture, installation, sales and service. Jobs pay \$200 to \$1,000 a month. And now a new easy method trains you at home to fill a big pay job. Learning Electric Refrigeration simplified amazingly. This course sponsored by Kelvinator, and praised by Servel and other leading manufacturers. Our Employment Department helps you find big jobs, FREE.

### Big Book Free

Mail coupon now for big book free "The New Giant Industry—Electric Refrigeration." See how easy it is to quickly become a highly paid refrigeration expert. No obligation. Utilities Engineering Institute, Dept. 2109, 4403 Sheridan Road, Chicago, Ill.

"Your Institute should be of great interest to young men wishing to get into the service and sales end of this business. It will be a pleasure to co-operate with you."  
Col. F. E. SMITH,  
President,  
Servel, Inc., Ill.

#### Utilities Engineering Institute

Dept. 2109, 4403 Sheridan Road, Chicago, Ill.  
Without obligating me, send free book "The New Giant Industry—Electric Refrigeration."

Name.....  
Address.....  
City..... State.....

## BIG MONEY IN THE AIR!

The big jobs in Aviation always go to the College-trained Aeronautical Engineer. Get ready now to take your place in the world's fastest growing BIG MONEY industry.

### NOW! 2 1/4 Year College B. S. Course

In just 108 interesting weeks Tri-State College gives you the equivalent of four years of the usual 4-year College work. Intensive course eliminating frills and specializing in laboratory, science, field work, Mathematics. Bachelor of Science degree authorized by the State of Indiana.

#### LOW COST—NO ENTRANCE EXAMS

Tuition about half. Living expenses low. Fine equipment—competent teachers. For 45 years TRI-STATE has been chosen by men, short on time, money and education, but strong in ambition. Terms start Sept., Jan., March and June. FREE Catalog and record of successful graduates. State course that interests you.

#### Engineering Courses Given:

- |   |                                       |                                   |
|---|---------------------------------------|-----------------------------------|
| <input type="checkbox"/> Civil          | <input type="checkbox"/> Aeronautical | <input type="checkbox"/> Chemical |
| <input type="checkbox"/> Mechanical     | <input type="checkbox"/> Electrical   | <input type="checkbox"/> Commerce |
| <input type="checkbox"/> Administrative |                                       |                                   |

Tri-State College  
Box AE-7109, Angola, Ind.

## Be Popular! Learn to play a Pan-American

You Too, Can be Playing—Before Christmas

Surprise all your friends, make new ones, sure popularity before Christmas by learning to play a Pan-American saxophone, trumpet, clarinet, or any band instrument. Only a few lessons, and you can play any popular air—so easy to learn.

#### Moderately Priced

Sent on free trial. Easy time payments. Only moderately priced band instrument, factory guaranteed. Recommended by professionals and band masters everywhere. Write today for free illustrated catalog.



Pan-American Band Instrument & Case Co.  
1004 Pan-American Bldg. Elkhart, Ind.

## VACUUM CLEANER MEN

Your selection of 30 leading makes, rightly rebuilt vacuum cleaners. From \$5.00 up. All fully guaranteed. Perfect in action and appearance. Any quantity desired. Biggest vac bargain ever offered. Here's real money for you. ATTACHMENTS, bags, belts, brushes, all other parts, and new specialties. Highest quality. Lowest prices. Complete FREE Catalog.

World's Largest Factory Rebuilders  
**UNITED ENTERPRISES, Inc.**  
13029 Athens Ave. Cleveland, U. S. A.





## Glimpses of Unusual Men

(Continued from page 80)

comparatively uneventful life of a lithographer, photo-engraver, and newspaper cartoonist. But then came the Spanish-American War, and he saw service in Cuba with his National Guard Regiment, meanwhile acting as war correspondent for the *Brooklyn Daily Eagle*. After his return, he had settled down to the peaceful business of conducting a small newspaper syndicate when he learned that William Ziegler, millionaire manufacturer, was organizing an expedition to the North Pole under the leadership of Evelyn Briggs Baldwin, who had been one of Admiral Peary's assistants. The wanderlust seized Fiala and he joined the party as photographer.

The journey was unsuccessful so far as reaching the Pole was concerned, but it gave Fiala a chance to distinguish himself by his daring and ingenuity. The ship, the *America*, had been ice-locked for nine months when Baldwin decided to blast his way out. The crew got busy with explosives, but after a couple of days a few blackened dents in the ten-foot ice around the ship were the only evidences of their work. Then the photographer discovered an opening in the two-mile ice cake in which the ship lay embedded. He asked Baldwin for permission to blast the cake in his own way. Risking his life several times, Fiala mined the huge frozen island with gun-cotton for about a mile. Within five days, a series of terrific explosions had freed the *America*, and she returned home safely. In recognition of his feat, Baldwin made his photographer second in command.

WHEN two years later, in 1903, Ziegler sent out another North Pole expedition, he placed Fiala in charge. The expedition sailed in June, again aboard the *America*. More than a year passed, and nothing was heard from the explorers. In July, 1904, Ziegler sent out a relief ship, but the vessel returned in the fall without news of the expedition. Another year went by without a word from Fiala and his men, and it seemed as if the Arctic had swallowed the *America* and all aboard her. Then a second rescue ship found Fiala and his crew encamped on two frozen islands north of Franz Josef Land.

They had suffered almost indescribable hardship. Settled for their first Arctic winter on Rudolf Island after battling forty-nine days through 500 miles of ice, they woke up one pitch-dark morning to find that their ship had broken away from its moorings in a Polar hurricane. After four days of icy tempest, the *America* came riding back, and Fiala left the base and transferred his headquarters to the ship. But not for long. One night, all hands were awakened by a thunderous crash and the shriek of breaking timbers. By the glare of rockets the explorers saw giant masses of ice crowding in on their vessel. They unloaded the ship in a frenzied rush. No sooner were they back at the base than the *America* was literally splintered to bits by the ice.

But Fiala did not give up hope of reaching the Pole. Two unsuccessful northward dashes followed. On the first, many of the men became so discouraged that their leader took them back to Cape Flora, on the southern tip of Franz Josef Land, where they could wait for a relief ship. The majority of his crew safely settled in huts, Fiala, with a handful of volunteers, started back north. With their dog teams and sledges, they made a fifty-four-day trip across frozen Polar seas, the last half through Arctic night. During this journey, Fiala and one of his men fell into the fissure of a glacier and were rescued by their companions. At last they reached Rudolf Island, their original base. In the spring, all was in readiness for the final dash to the Pole when, one night, the ice began to crack right under their tents. Fiala then aban-

(Continued on page 148)



"I think that the letter that you sent to my employer had great weight in his decision to employ me. I like the position very well. William L. Olesky, Shawnee, Kansas."



"I have obtained a position as a junior draftsman with the Muncie Oil Engine Co. I appreciate your aid in obtaining this position very much. Maurice N. Bareham, Muncie, Ind."



"Thank you very much for your assistance, which enabled me to secure a position as a draftsman with the Mississippi Valley Power Company. Lowell Perry, Fort Smith, Ark."



"I am very well satisfied with the results of your and my efforts to get me a job in the drafting room of the Michelmann Steel Construction Co., Quincy. The gentleman who spoke highly of your correspondence course. Marcus Linse, Danvers, Ill."

## Let these men tell you--

## how to get a good Drafting Job!

**D**URING the past few months we have placed HUNDREDS of former clerks, mechanics and beginners in fine positions—with Contractors, Architects, and in big manufacturing plants. (Read a few typical letters above.)

These men came to us because they were dissatisfied with their earnings and with their future prospects. Now they are doing work they like—making good money—and have a real chance to advance still farther.

If you are trying to solve a similar personal problem, we invite you to get in touch with us. We'll be glad to tell you how you, too, can get a well-paid Drafting job—without risking a penny of your money.

## Why we recommend DRAFTING

We believe it will pay you to investigate Drafting. Many of our most successful Contractors and Engineers STARTED in the Drafting room. That opportunity to get to the top—to meet big men—to take charge of important projects is the best feature of Drafting.

The work is interesting and pleasant. The hours are easy. You work with a wonderful bunch of fellows. Salaries range from \$35 to \$50 a week for beginners, up to \$100 and more a week for experienced Draftsmen.

One man puts it this way: "I really didn't know exactly what Drafting was. I thought it required artistic talent and a high school or college education. I was much surprised to find it wasn't any harder to learn than my former trade of plastering."

## PROMOTION for Office and Factory Workers

If you're a shop man you can realize that the man who makes the plans is a step above the workman who follows the blue-print. If you're a clerk you know that copying figures all day cannot compare in salary or responsibility with creating designs and plans of buildings, machinery, or the products of industry.

How are you going to get away from routine work—how can you even get a \$10 a week increase in pay—how can you get into a line where there is a real future? Let us show you that Drafting offers you all these things—in less time, and with less effort than any other line.

## And Now—Jobs for STUDENTS!

For the past five years the American School has provided a free Employment service for all who completed this home-training in Drafting. Now we have found a way to help place all STUDENTS when only half-way through the course. Mail coupon for complete information of this remarkable service.

## Free—DRAFTING BOOK

Over 70,000 fine Drafting positions have been advertised in the past year. Electrical, Architectural, Mechanical, Structural and Automotive lines, all need Draftsmen. Here is one of the biggest fields you can get into. Get our free 36-page book and see how easily you can learn and how we help you get a well-paid position as soon as you are ready for it.

The American School Dept. D-748  
Drexel Ave. & 58th St., Chicago  
Please send FREE and without obligation 36-page Drafting Book and your offer to help me get a Drafting job when only half-way through the course.  
Name.....Age.....  
St. No.....  
City.....State.....

**The American School**

Dept. D-748 Drexel Ave. & 58th St.  
Chicago, Ill.



# Electricity POWER and PROFIT

More and more is electricity lifting the weight of labor from the shoulders of man. If you are not satisfied with your present job, become an ELECTRICAL EXPERT and free yourself forever from the discontent of low wages. You do not need any previous training. Any man who can read and write and use his hands can become an electrical expert.

## Here is Your Opportunity

The NEW YORK ELECTRICAL SCHOOL prepares you for the BIG PAY profession. First you learn the theories of electricity and then you put them into actual practice. You solve each problem with your own hands. When you have completed your course at the NEW YORK ELECTRICAL SCHOOL you can go to any part of the world and be sure of a good living. Write today for the 48-page booklet giving full information on how to be an electrical expert.

## NEW YORK ELECTRICAL SCHOOL

40 W. 17th Street, New York



## Glimpses of Unusual Men

(Continued from page 147)

doned the attempt and started south, where the rescue ship found him and his men.

Back in New York, Fiala conceived the idea of making a specialty of outfitting explorers. One day, Theodore Roosevelt called upon him for equipment. Impressed by his personality and experience, the Colonel invited Fiala to accompany him to Brazil. Shortly after his return from this expedition, Fiala saw service on the Mexican border as captain of a machine gun troop. During the World War, he was placed in charge of the Army proving grounds at Springfield, Mass., with the rank of major.

Major Fiala, who is a member of the Explorers' Club, is an inventor and a writer as well as an explorer. Among the devices he has originated are firearms, a sleeping bag, tents, and a pneumatic attachment for canoes that prevents them from capsizing. He is the author of *Fighting the Polar Ice*, a description of the Ziegler expedition; the scientific record of the trip; and of a book dealing with the Spanish-American War.

## A Patron of Sciences

THE latest contribution to science by Colonel E. H. R. Green, son of the late Hetty Green, "the world's richest woman," is a \$30,000 dirigible hangar on Round Hills, his 277-acre estate overlooking Buzzard's Bay at South Dartmouth, Mass. The building, 140 feet long and seventy-two feet high, has been placed at the disposal of research men of the Massachusetts Institute of Technology as a laboratory for conducting fog-fighting experiments on the estate. It houses the *Mayflower*, a blimp presented to M. I. T. by Paul W. Litchfield, president of the Institute's Alumni Association and of the Goodyear-Zeppelin Company. It will enable investigators to explore fog regions a mile in the air at a slow rate of speed. Photographs of the blimp are shown on page fifty-two of this issue.

The fog laboratory is only part of a huge aviation experimental center the Colonel began establishing at Round Hills in 1927. His interest in flying dates from Lindbergh's transatlantic flight. The young airman's phenomenal accomplishment fairly elated the multimillionaire, who presented to his numerous friends solid gold replicas of the *Spirit of St. Louis* in the form of pins. He constructed a great airport, equipped with the two largest runways in New England, and erected a wall in Buzzard's Bay to act as a breakwater for seaplanes. The entire center cost more than \$2,000,000. Next year, the Colonel says, he will turn it over to the United States War Department for one dollar.

But aviation, though his most recent hobby, is by no means the Colonel's only one. For years the latest developments in science and invention have fascinated him. Round Hills is a veritable scientists' paradise. Here, in a group of completely equipped laboratories, at least a hundred men are conducting technical experiments in radio, radio movies, electricity, photography, and other branches of applied science.

One of the most remarkable features at Round Hills is a private radio station, WMAF, which Green built in 1923 at an expense of \$500,000. Programs are carried by wire from New York to the estate, where they are amplified and broadcast through enormous loudspeakers that can be heard for miles. Hundreds of persons journey for miles in boats, motor cars, and on foot to enjoy them. But that was not enough for the altruistic Colonel. He remembered those who were unable to reach Round Hills. In the summer months, a receiving set is mounted upon a truck which visits hospitals, homes for the aged, orphanages, and

(Continued on page 149)

## \$25 Extra Each Week for YOU—Easy



### Make BIG MONEY—Spare-Time or Full-Time—with Hawaiian Guitar

Be the life of every party—be paid big for your spare-time hours! Dances, parties, orchestras—all pay REAL CASH for the sweet melodious music of the Hawaiian Guitar. YOU can make \$25 a week and up extra; or \$65 to \$100 a week full-time pay!

No Musical Knowledge Needed; Learn Quick Right at Home in 1 to 3 Months

My easy method explains everything. No hard practice, no tiresome "scales" to learn. You play real tunes from the very first! And in only 1 to 3 short months you can actually be playing for pay. I'll prove it to you without cost; get my FREE Book below!

### PROOF

"Had learned only a few chords when I was asked to play at a dance. Received sixteen dollars (\$16) for one night's playing."

—R. A. Prutzman, Lehighton, Pa.

"Only quarter way through course and already playing 3 evenings a week, spare-time, for \$10."

—J. Krulich, Kitchener, Ont., Can.

"Have made almost \$200 with my Hawaiian Guitar in spare-time."

—John B. McMillan, Cedar, Mo.

### PHONOGRAPH RECORDS and Complete Outfit at No Extra Cost

You also receive clear, correct, fool-proof Demonstration Phonograph Records of every selection in the course. And NOT ONE CENT OF EXTRA COST to you!

### FREE BOOK Shows You How

Shows how I train you at home, quickly to play Hawaiian Guitar; how you risk absolutely nothing to learn; how I send you everything you need. Clip the coupon and send it today. NOW!

This Genuine HAWAIIAN Guitar Comes with 1st Lesson



## MAIL NOW!

A. F. Bloch, President, Hawaiian Studios 56109 of New York Academy of Music, 100 Fifth Avenue, New York City

Without obligation, send me FREE Book "How to Learn Hawaiian Guitar," with facts on how I can make BIG MONEY, spare-time or full-time.

Name \_\_\_\_\_

Address \_\_\_\_\_



Learn Write

Begin Today—Write for my FREE BOOK. I can make a good penman of you at home during spare time. Write for my FREE BOOK, "How to Become a Good Penman." It contains specimens and tells how others mastered penmanship by the Tamblyn System. Your name will be elegantly written on a card if you enclose stamp to pay postage. Write today for book.

F. W. TAMBLYN, 437 Ridge Bldg., Kansas City, Mo., U. S. A.

## Learn ELECTRICITY in Los Angeles

PRACTICAL training by National's tested job-experience method. All branches of electricity; radio. Life scholarship. 17,000 successful graduates. Million-dollar institution.

23rd year. Write for FREE illustrated catalog. National Electrical School

Dept. 301-ED Figueroa & Santa Barbara Sts., Los Angeles, California

### Men's Strap Watch

LATEST MODEL

SAVE 50%

\$3.69

A fully GUARANTEED accurate timekeeper—tested and adjusted jeweled Swiss movement—artistically engraved case as illustrated—radiant dial—genuine leather strap. Order This Bargain Today. Pay on delivery only \$3.69. We pay postage.

—FEDCO—U. S. Swiss Agents

661 Broadway, New York, N.Y., Dept. L-1024



## Glimpses of Unusual Men

(Continued from page 148)

other institutions. For his own amusement, Green has a small loop receiver attached to the roof of the electric brougham he has used ever since rheumatism made walking difficult.

The Colonel enjoys an international reputation as an amateur photographer, and one of his laboratories is devoted exclusively to photographic experiments. Among his personal feats in this field is the photographing of scenes ten miles away with a forty-eight-inch-focus camera.

Colonel Green, a man of unusual vitality and energy, began his scientific hobbies about 1918, two years after the death of his famous mother. He was then just fifty years old, an age at which most men, inheriting vast wealth, would be content to take life easy.

But Green had had a hard schooling. His mother had determined that her son should get acquainted with work at first hand. After his graduation from Fordham University, New York, where he studied law, she obtained a job for him in a law office, where he was trained in the legal technicalities of real estate. Two years later she took him to Chicago, where she controlled great holdings, and personally drilled him in the management of property.


Three years later, in 1893, Hetty Green gave her son the Texas and Midland Railroad and sent him to the Southwest to manage it in person. Here Green demonstrated that he had inherited his mother's business genius. In the seventeen years of his management, the railroad increased in value from \$750,000 to \$5,000,000. Besides, he engaged successfully in a number of other enterprises and also entered politics. The title of Colonel was bestowed upon him by a Texas governor.

Even in the Texas years, Green's scientific leanings found an occasional outlet. Shortly after Marconi's wireless experiments in 1896, Green attempted to apply the new science to railroading, but was unsuccessful. He assisted Lubin, pioneer motion picture producer, who was one of his employees, in his early experiments, and once financed five French flyers who came to grief in Texas. In 1910, the Colonel was summoned back to New York to aid his mother, whose health was failing, in the management of her properties. He was married in 1917. One hobby he and Mrs. Green have in common is the education of orphan girls.

## Small Balloons Show Height of Clouds

TOY balloons are being purchased in quantity by the United States Department of Commerce to measure the height of clouds above airports. "Ceiling" information is important to incoming airmen because low-hanging clouds, besides having powerful updrafts rising beneath them, restrict visibility, making landings hazardous. When the balloons are inflated with hydrogen until they will support forty grams, about an ounce and a half, it has been found that they rise at the steady rate of five and a half feet a second. The balloons are timed as they soar upward. The number of seconds that elapse before they disappear in the clouds, multiplied by five and a half, gives the exact height in feet of the "ceiling."

At night, a different method is employed. A powerful searchlight beam is projected at an angle of forty-five degrees and the point directly under where the beam strikes the clouds is determined. As the distance from the searchlight to this spot can be measured and used as the base of a right angle triangle, the upright leg of such a triangle can be computed, and its length gives the height of the clouds above the earth.

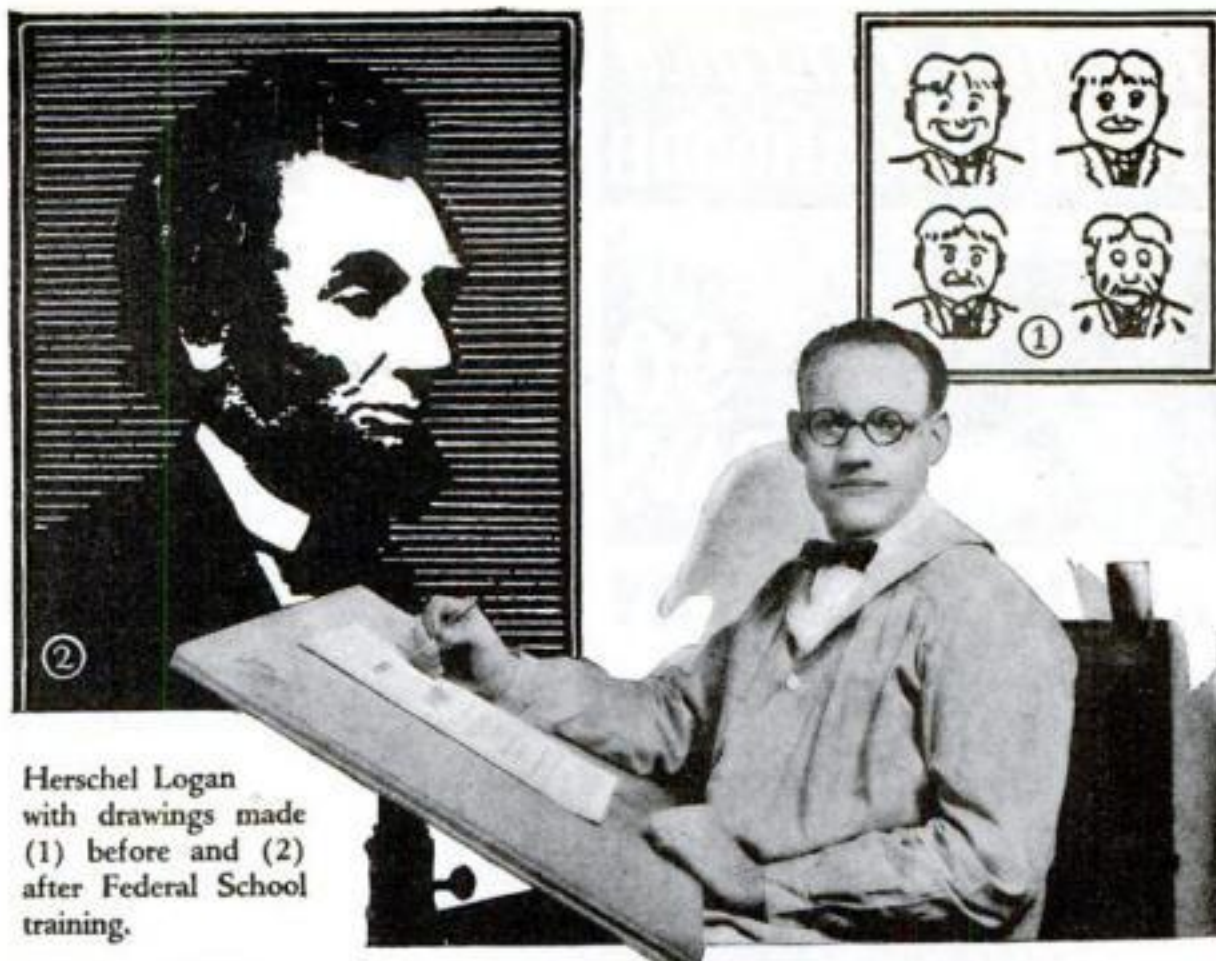

Herschel Logan with drawings made (1) before and (2) after Federal School training.

# DRAWING turns INK to GOLD

HERSCHEL LOGAN wanted to make money. He liked to draw, but his work (an example of which is shown in No. 1, the small crudely drawn heads above) was not good enough to sell. Seeing an advertisement of the Federal Schools, he filled out a coupon like the one at the bottom of this page. Now compare his recent work, No. 2, with the crude ink scratchings he did before he enrolled in the Federal Course. The drawing of Lincoln shows that Logan understands the proper application of ink. You can see for yourself how the Federal Course has "steadied" his hand. This is the type of drawing that is simple, strong, masterful and pays big money to the man who can do it. Mr. Logan is just one of hundreds of young people making good money because of Federal Training.

Publishers buy millions of dollars worth of illustrations like Logan's, every year. If you like to draw let your talent make your fortune.

Over fifty famous artists contribute exclusive lessons and drawings especially prepared for the Federal Course. It's easy to learn the "Federal Way." Study at home in your spare time.

## Test Your Drawing Talent

Many people have a talent for art and do not realize it. It is well proven by Logan's first work compared with his drawing of Lincoln. Do you like to draw? A liking for drawing usually indicates talent which can be developed. Our Standard Vocational Art Test will tell you just how much ability you have. Send for it, it's free. We will enclose with it our illustrated booklet, "A Road to Bigger Things," which explains

illustrating as a profession, tells about famous artists who have helped build up the Federal Course and shows the remarkable work of students. You'll want both the booklet and the test chart. Fill out the coupon now.

**Federal School of Illustrating**



FEDERAL SCHOOL OF ILLUSTRATING,

10149 Federal School Bldg., Minneapolis, Minn.

Please send your free book, "A Road to Bigger Things," together with your Standard Vocational Art Test.

Name.....Age.....

Occupation.....

Address.....



## Become a Trained Radio-Technician



### RADIO INDUSTRY

Pleads For

### "Registered" Radio Experts



MICHAEL ERT, Pres., Michael Ert, Inc., and Pres. Federated Radio Trade Assn. and Director, Wis. Radio Trade Assn.

Opportunity beckons as never before in the Radio Industry. Good paying positions, interesting work, a chance to become independent—radio offers all this and more to ambitious men who seize the opportunity NOW!

### Radio Trade Association Approves S. of E. Radio Graduates

The Wisconsin Radio Trades Ass'n now compels every radio service man to pass severe examinations and become registered. Dealers are tired of untrained, incompetent help. Radio trade associations the country over are planning to follow Wisconsin's example. *The School of Engineering is the only institution in the country whose course is approved by a radio trade association.* Graduates of the S. of E. are "registered" without examination—14 S. of E. men successfully employed by R.C.A. Photophone, Inc.

### Most Thorough Practical Radio Course in America

Here in this big splendidly equipped electrical school (from which Station WISN is operated) you can secure in three months the most thorough, the most compact and practical radio training offered anywhere. Covers entire field of radio! Complete course includes Radio Laboratory Practice, Radio Telephony Theory, Radio Transmission, Code Instruction, Electrical Mathematics, Service and Installation, Radio Sales and Merchandising. Daily broadcasting from WISN. All training is 100% practical. You learn everything in three short months!



Complete Radio Course also includes study of fundamentals of Television and latest developments in that gigantic new field. Enables anyone to keep up with progress of this new industry.

### TELEVISION INCLUDED

Complete Radio Course also includes study of fundamentals of Television and latest developments in that gigantic new field. Enables anyone to keep up with progress of this new industry.

### EARN WHILE YOU LEARN

Not only do we help place our men after graduation, but we can arrange for part-time employment for ambitious men who can finance their tuition. This will cover part if not all of your living expenses while you are taking the Radio Course at the School of Engineering.

### SEND FOR FREE BOOK

Send today without obligation, for FREE catalog describing the wonderful opportunities in radio, the three month Radio Course, and details of our Earn While You Learn Plan.

## SCHOOL of ENGINEERING of Milwaukee

School of Engineering  
Milwaukee, Wis.

Dept. P.S.M. 1029

Without obligation, please send me FREE Book describing your 3 months Radio-technician course and full details of your "Earn While You Learn Plan."

Name.....Age.....

Address.....

City.....State.....

## Plant "Pills" Grow Bumper Crops

(Continued from page 30)

the greater number of the destructive insects.

Careful calculations, based on actual experiments with these tanks, indicate that in two or three seasons the vegetable grower would repay himself, from the extra production, for the original outlay for tankage.

It has been determined that the best division of the shallow tanks is in small sections measuring twenty by ten feet. This facilitates the planting and gathering of crops, and the maintenance of the water level. Such small sections also would enable the farmer to control more closely the area devoted to each vegetable, depending on market and demand. Cost of the "pills" for large-area fertilization will run about one-half that of the best commercial soil fertilizers, but, with the water-tank method, the variability of soils and their differing demands for "renewal" are eliminated.

CLIMATE, absence or presence of humidity, richness or poverty of soil—none of these formerly vital factors in agriculture, seems to affect results so far achieved by the Gericke discovery. Though it will not make a new plant grow in a climate to which it is not adapted, it will increase size, production, and rapidity of growth of all commercial crops in their own proper zones.

Thus, Dr. Gericke and his students produced, in controlled areas, conditions of heat and aridity similar to those of the desert sections of Arizona, New Mexico, and southeastern California. On these miniature deserts, they set up tanks, in which were planted radishes, turnips, beets, lettuce, spinach, chard, tomatoes, egg plants, and other food crops. It was found that, compared with 5,000 tomato plants—a heavy cropping from one acre of soil—more than 20,000 plants of equal size and strength could be produced in one acre of tanks, with twenty-five to sixty percent greater productivity.

Dr. Gericke is convinced that the real importance of the new discovery lies in the application of the tank principle of food production to the arid regions of the world.

"It has been proved," he told me, "that the sands of the desert are fertile, if water can be placed on them in sufficient quantity. But there are millions of such acres to which water cannot now be, and probably never will be, supplied in amounts sufficient for adequate irrigation. Yet a few gallons of water, thinly covering the bottom of a comparatively cheap tank, can be made to produce food in abundance, in the midst of the most barren desert. Any small spring will supply this water; it can be hauled in at a profit, or it can be caught in those areas where even a slight rainfall comes every winter. Anyone can build the tanks, and in the equable climate of the desert, from the latitude of Arizona southward, two crops a year, or at worst three crops every two years, can be produced."

TO COVER the bottom of a tank twenty by ten feet in size, containing 171 tomato plants, for example, requires 100 cubic feet of water—roughly 750 gallons—with the addition of about half as much more during the growing season to make up for evaporation and absorption. If to maintain a six-inch depth, the total of water is placed at 1,200 gallons, an excessive amount, a considerable quantity will remain for the next planting. This quantity of water would not adequately irrigate an area of land one half the size of this tank for one season. Yet an equal area of land, even if thoroughly irrigated, would produce at its maximum, only about one-fifth of the food plants that can be grown in the tank. Each of the earth-grown plants, too, would deliver only about sixty percent of the production of each of the tank plants.

"There are few sec- (Continued on page 151)

## Over the Mountains from Los Angeles



Think of it! FIVE HUNDRED FIFTY-NINE MILES over rough mountainous country burning only ELEVEN GALLONS OF GASOLINE. Imagine more than FIFTY MILES TO THE GALLON. That is what the WHIRLWIND CARBURETING DEVICE does for D. R. Gilbert, enough of a saving on just one trip to more than pay the cost of the Whirlwind.

## THE WHIRLWIND SAVES MOTORISTS MILLIONS OF DOLLARS YEARLY

Whirlwind users, reporting the results of their tests, are amazed at the results they are getting. Letters keep streaming into the office telling of mileages all the way from 22 to 59 miles on a gallon, resulting in a saving of from 25% to 50% in gas bills alone.

Mark A. Estes writes, "I was making 17 miles to the gallon on my Pontiac Coupe. Today, with the Whirlwind, I am making 35.5 miles to the gallon."

P. P. Goersen writes, "34-6/10 miles with the Whirlwind, or a gain of 21 miles to the gallon."

R. J. Tulp, "The Whirlwind increased the mileage on our Ford truck from 12 to 26 miles to gallon and 25% in speed."

Car owners all over the world are saving money every day with the Whirlwind, besides having better operating motors. Think what this means on your own car. Figure up your savings—enough for a radio—a bank account—added pleasures. Why let the Oil Companies profit by your waste? Find out about this amazing little device that will pay for itself every few weeks.

### FITS ALL CARS

In just a few minutes the Whirlwind can be installed on any make of car, truck or tractor. It's actually less work than changing your oil or putting water in the battery. No drilling, tapping or changes of any kind necessary. It is guaranteed to work perfectly on any make of car, truck or tractor, large or small, new model or old model. The more you drive the more you will save.

**Salesmen and Distributors wanted**  
**Free Sample and \$100.00 a week offer**

Whirlwind men are making big profits supplying this fast selling device that car owners cannot afford to be without. Good territory is still open. Free sample offer and full particulars sent on request. Just check the coupon.

### Guarantee

No matter what kind of a car you have—no matter how big a gas-eater it is—The Whirlwind will save you money. We absolutely guarantee that the Whirlwind will more than save its cost in gasoline alone within thirty days, or the trial will cost you nothing. We invite you to test it at our risk and expense. You are to be the sole judge.

### Free Trial Coupon

Whirlwind Mfg. Co.,  
999-80-E Third St., Milwaukee, Wisc.  
Gentlemen: You may send me full particulars of your Whirlwind Carbureting device and free trial offer. This does not obligate me in any way whatever.

NAME.....

ADDRESS.....

CITY.....

COUNTY.....STATE.....

Check here if you are interested in full or part time salesman position.

## Start to Play Very First Day

Be the life of the party. Xylorimbists make \$5 to \$25 a night. No knowledge of music required. Wonderful for home. Free, easy lessons; five days' trial; a year to day.

Send Coupon for BIG FREE BOOK!

J. C. Deagan, Inc., Dept. 1657-A 1770 Berteau Ave., Chicago  
Send me, without obligation, full details of Free Trial offer and easy-payment plan on the Deagan Xylorimba.

Name.....

Address.....

## Electrical Engineering

Condensed course in Theoretical and Practical Electrical subjects of Mathematics and Mechanical Drawing. Students construct motors, install wiring, test electrical machinery. Course designed to be completed in one college year.

**BLISS ELECTRICAL SCHOOL**  
Prepare for your profession in the most interesting city in the world. Catalog on request.  
110 Takoma Ave., Washington, D.C.

## EARN UP TO \$125.00 A WEEK in MECHANICAL DENTISTRY

Learn in few months to make plates, crowns, bridges, etc., for dentists. No books. Day or night schools in Chicago, Detroit, Cleveland, Boston, Philadelphia.

McCarrie School of Mechanical Dentistry  
1338 S. Michigan Avenue Dept. 344 Chicago, Ill.



## Plant "Pills" Grow Bumper Crops

(Continued from page 150)

tions of the American desert on which there is no annual rainfall," said Dr. Gericke, "and almost none on which artesian wells cannot be brought into flowing at comparatively shallow depths. One rainfall, properly caught and conserved, will supply enough water for a number of these tanks for a year. The output of one small well, insufficient to irrigate adequately one acre of soil, would provide an abundance of water for ten acres of tanks. The cost of building the concrete tank is about one-tenth of that necessary to produce water enough for soil irrigation and to install pumps, reservoirs, and canals for its conservation and delivery to the fields. The tank is independent of gravity or pumps, and water enough to supply many such tanks can be obtained from almost any spring, well, or natural 'tank' on the desert."

IN HIS vision of the future, the plant physiologist foresees every desert spring surrounded with flat, shallow tanks, each containing a few inches of water, and each filled with food-producing plants in numbers sufficient to feed large populations. He declares that the tank system will eventually replace the "furrowed field" as a source of the food for large centers of population. With it, for instance, the roof of a skyscraper could be turned profitably into a vegetable or flower garden. The man with a city lot could add materially to the family income by the use of only a small part of his land.

"There is now open to the man living on the most remote farm, in the most barren land in the world, the means of providing himself and his community, at low cost, with all the vegetable foodstuffs the climate will permit," continued Dr. Gericke. "An area less than one-fourth that which, in my boyhood days, supplied the 'garden truck' for the family, will produce foodstuffs of variety, quality, quantity and value never dreamed of by the home gardener. Incidentally, the labor required will be only a small fraction of that needed for proper tilling of the soil. This, it seems to me, is the greatest value of the five years of experiments we have been conducting—that millions may be fed from water, on soils that hitherto have produced nothing but an occasional clump of cacti, or a few fig trees."

## Light Exerts Pressure, Experiments Indicate

DR. HERBERT J. BRENNEN, physicist of Northwestern University, a few weeks ago revived the old theory of Sir Isaac Newton, the great seventeenth century English scientist, that light consists of corpuscles, or minute particles, by declaring that light is composed of electrons. This would mean that sunshine and the electrons given off from a hot filament in an electric lamp are, in the last analysis, the same thing—atomic matter.

Dr. Brennen's theory seems to be supported by the fact, discovered by Professor E. F. Nichols, of Yale University, and Dr. G. F. Hull, of Dartmouth, that light exerts a certain pressure upon a body which it strikes, in the same way as a jet of water trained, for example, upon a wall. This pressure is exceedingly slight, but the two scientists actually succeeded in measuring it. They found that sunlight strikes the earth—or rather that half of the globe which it illuminates at one time—with a force of 160 tons. Later experiments have shown that a ray of sunlight has mass or inertia. According to Dr. Albert Einstein, a beam of light is deflected by the pull of gravity exactly like a water jet. The truth of that theory was proved in the sun eclipse of 1919. Professor Einstein, however, does not give the weight of light as the cause of this phenomenon.

# Raise Your Pay

with these **Tools** ↓

and with this **FREE** Pay Raising Plan ↓



These drawing instruments and 14 other tools furnished with my course.

Make these tools help you to land a job leading to salaries of from **\$70.00 to \$175.00 a week**

## Jobs Waiting!

For Men Who Can Use These Tools In—  
**Aviation Building Construction Bus Building**  
**Electricity Automobile Manufacturing Road Construction**

There are jobs for Draftsmen in all of the above industries. Those industries are growing bigger every year.

Industry cannot continue without draftsmen. All construction, all new machinery, all automobile and motor bus manufacturing, all electrical machinery building depend upon draftsmen.

I train you in drafting at home by mail. You keep your job while learning. I even show you how to earn extra money. I train you entirely in your spare time. No previous experience is necessary. You do not need to be a college man or high school graduate to learn by my quick, easy method.

After you have taken my training, I help you get a job without charging you a cent for this service. Employers of draftsmen come to me for men because they know they are not taking any chances on men trained by me.



"I train you at home!"—  
Engineer Dobe

Men I have trained are making from \$3500 to \$9000 a year. They lifted themselves from poor paying jobs to positions paying a good, straight salary, the year around, with comfortable surroundings and inside work.

IF YOU EARN LESS THAN \$70.00 A WEEK, you should write to me for my Free "Pay-Raising Plan."

Mail this coupon now. It points the way to success and opens up a road to salaries leading to from \$70.00 to \$175.00 a week. You owe it to yourself to send for this Pay-Raising Plan. Find out how I help you locate good paying opportunities in practically all the big industries. The book will come to you postpaid and free.

MAIL THE COUPON FOR IT TODAY

Engineer Dobe, Div. 13-67 1951 Lawrence Ave., Chicago

**Free "Pay-Raising Plan"**

**ENGINEER DOBE, Div. 13-67**  
1951 Lawrence Ave., Chicago

Send me Free of all cost, "My Pay-Raising Plan". Also plan to earn money while learning to be a draftsman and proof of big money paying positions in great industries.

Name.....Age.....

Address.....

Post Office.....

State.....

## BE A JAZZ MUSIC MASTER

### Play Piano By Ear

Play popular song hits perfectly. Hum the tune, play it by ear. No teacher—self-instruction. No tedious ding-dong daily practice—just 20 brief, entertaining lessons, easily mastered.

At Home in Your Spare Time  
 Send for FREE BOOK. Learn many styles of bass and syncopation—trick endings. If 10c (coin or stamps) is enclosed, you also receive wonderful booklet "How to Entertain at Piano"—and many new tricks, stunts, etc.

Niagara School of Music  
 Dept. 337 Niagara Falls, N. Y.

Send for this Free Book

## Make Steady Money

### SELL ROSECLIFF SHIRTS

Ties also

**Your OWN Shirts FREE!**

Free Outfit

Rosecliff—a real house—gives:  
 1. One year guarantee  
 2. No substitutes—we ship exact  
 3. Silk embroidered initials Free  
 4. Big commissions in advance  
 5. A shirt for every size and taste  
 —8 More Money-Making Features establish our Leadership.

Sell The Best!  
 Write for your outfit NOW!

**Rosecliff Shirt Corp.**  
 Dept. PS10 1237 Broadway, N. Y.

## TRAVEL FOR "UNCLE SAM"

### Railway Postal Clerks



**\$158 to \$225 a Month**  
 MAIL COUPON BEFORE YOU LOSE IT

FRANKLIN INSTITUTE, Dept. A-269  
 Rochester, N. Y.

First: Rush to me without charge—copy of 32-page book, "How to Get U. S. Government Jobs," with list of positions obtainable and full particulars telling how to get a position.

Name.....  
 Address.....


Steady Work — No Layoffs — Paid Vacations  
 Many Other Government Jobs Obtainable  
 MEN—WOMEN 18 to 50



# WHY Be Poorly Paid I'll Train You Quickly For A Better JOB Electricity

**Pays experts big money!**

Why earn low wages for the rest of your life! My intensive 90 day course in Electricity will put you on the road to success—where salaries range from \$175 to \$400 a month—and opportunities are limitless!

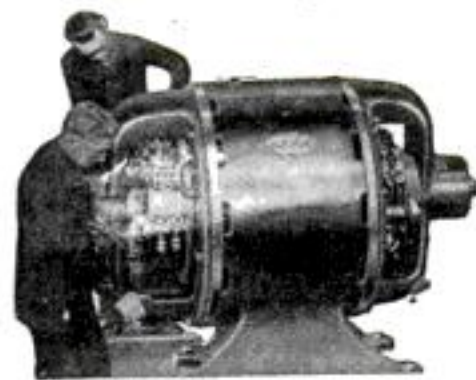

**Coupon  
Below  
Brings  
You Big  
FREE  
BOOK**

## Learn by Doing Actual Jobs

Don't worry about your education—some of my best students have not finished their grammar school! If you can read and write, and have the AMBITION TO SUCCEED—my training methods will overcome your educational handicaps!

By my methods, YOU actually wind armatures—wire houses—overhaul generators—test motors—operate switchboards—distribute "juice"—or hunt wire trouble—just as you will do when you step into your better paying job as an electrician. No useless theory holds you back!

Furthermore, it requires twelve floors in three buildings to house all of my up-to-date equipment, and a staff of 35 instructors, experts in their fields, to teach and guide Greer students to success! It's better to be a Greer Student!!!

## It's Easier to Work Your Way Through School at Greer College

Don't let the lack of money keep you from coming here! Long years of experience have taught me that you may need help to work your way through Greer College. To meet this need, I have established a large employment department whose only job is to help you find work. If you need part or full time work, these experts, with numerous contacts among Chicago employers, will work unceasingly for you from the very day you arrive at Greer College, and it won't cost you a cent extra!

## My FREE Book Tells How You Win Success In Electricity

You owe it to yourself to read this book from cover to cover. See how thousands of satisfied and successful Greer Graduates receive their training—learn how easy it is to work your way through school at Greer College—Find out for yourself about this amazing opportunity to earn bigger pay—You'll never regret it!

Clip this coupon below and send it to me personally. I want to know every ambitious man by his first name—you included—then you will get a reply that will make you glad you wrote to me! Write me a letter and send the coupon NOW!

Mr. Erwin Greer, Pres.  
Greer College, Dept. 9L  
2024 S. Wabash Ave., Chicago, Ill.  
Dear Mr. Greer:

Without obligation send me free book and all details of your special offer.

Name.....

Address.....

Age..... Occupation.....

## The Bulldog of the Insect World

(Continued from page 31)

first frost, so that they never see their offspring.

When the baby wasp breaks from its cocoon in the ground, it immediately digs its way to the surface. For several weeks it lives on sweetened liquids, such as the nectar of flowers, honey dew, or the juice of fruits, lapping its food with a short rough-surfaced underlip, much as a cat uses its tongue. During this period, the wasps mate. In July the females start digging their underground nests.

In years when the noisy "seventeen-year locusts," or cicadas, are plentiful, they are often used by the wasps in place of the caterpillars. If these insects, far heavier than their captors, are found at any distance from the burrows, they are carried to the spot by a series of curious maneuvers. The wasp drags the body of the paralyzed cicada high into a tree, grasps it firmly, and launches into space. Its tiny wings become a blur as it tries to carry its impossible burden. Wasp and cicada fall to the ground in a long glide that carries them nearer the goal. Then the wasp tugs its prey into the branches of another tree and takes off again. Often three or four glides are required to reach the burrow.

**B**UT by far the most spectacular battle occurs when the wasp attacks the ugly fur-covered tarantula, which sometimes grows to the size of a baby's hand and lives as long as a horse. Ordinarily this dreaded insect stalks about near its nest like a master surveying his domain. But the hum of tiny wasp wings, heralding the approach of the "tarantula hawk," throws it into a panic. It runs this way and that, searching frantically for shelter. As the wasp circles closer, the great spider alternately scurries away in terror and rears itself to fight. The wasp weaves in and out with lightning-like dashes that confuse its adversary. The spider strikes out again and again, missing each time. At last it tires, leaves an opening, and the wasp, one-sixth its size, dashes in. One plunge of its paralyzing stinger and the battle is over.

However, it is not in such deadly gladiatorial contests, but in its steady attack upon cutworms and garden pests, that the wasp proves a friend to farmers. Experiments may soon be made in breeding quantities of these insect allies within laboratory walls. If such tests succeed, squadrons of the blue and orange battlers will be sent forth to join the insect army now fighting for man.

## Gems Made to Order in Chemist's Laboratory

**A** FRENCH chemist, Louis Nolet, is reported to have discovered a new process for the synthetic manufacture of precious and semiprecious stones, including emeralds, rubies, sapphires, opals, amethysts, and topazes, as well as marble, ebony, and jade.

Such a discovery may make it unnecessary for men to go to the ends of the earth for gems. A synthetic stone is not an imitation. It has the same chemical composition as the natural jewel, but is made by man instead of by Nature. An imitation has much the same appearance as the real gem, but possesses a different composition. A reconstructed stone is made of small pieces fused together. This process has proved most successful with rubies. Pearls are also sometimes made in this manner.

Of the 1,200 kinds of minerals known to science, only about 100 are classed as precious or semiprecious stones. Most of these, experimenters predict, may be produced in the chemist's laboratory.



## Your Chance to Enter Aviation

THE FASTEST GROWING FIELD of opportunity in the world today is in the business of flying.

Careers and fortunes will be made in aviation in the next ten years—made by men who learn it "from the ground up"—as mechanics. It is engines that are making aviation—engines and men who understand them.

The new International Correspondence Schools course in Aviation Engines offers you a real, practical opportunity to get into aviation. It is complete, up to date, easy to understand.

This course not only gives you a complete understanding of engine theory and principle, but an accurate working knowledge of every modern type of aviation engine—its carburetion, ignition, lubrication, timing, cooling, as well as accessories, up-keep and repair.

Studying with the I. C. S. you do not need to save up a large sum to tide you over. You don't need to give up your present job. You can learn, while you earn, studying in your spare time at home. And you can start now. Just mark and mail the coupon below. Do it today!

### INTERNATIONAL CORRESPONDENCE SCHOOLS "The Universal University"

Box 7643-F, Scranton, Penna.

Without cost or obligation on my part, tell me how I can qualify for the position, or in the subject, before which I have marked an X:

#### AVIATION ENGINES

- |  |  |
|--|--|
| <input type="checkbox"/> Complete Automobile Course    | <input type="checkbox"/> Gas Engine Operating Course |
| <input type="checkbox"/> Automobile Electric Equipment | <input type="checkbox"/> Complete Gas Engine Course  |
| <input type="checkbox"/> Electrical Engineering        | <input type="checkbox"/> Architect                   |
| <input type="checkbox"/> Electric Lighting             | <input type="checkbox"/> Architects' Blueprints      |
| <input type="checkbox"/> Mechanical Engineer           | <input type="checkbox"/> Contractor and Builder      |
| <input type="checkbox"/> Mechanical Draftsman          | <input type="checkbox"/> Architectural Draftsman     |
| <input type="checkbox"/> Machine Shop Practice         | <input type="checkbox"/> Concrete Builder            |
| <input type="checkbox"/> Railroad Positions            | <input type="checkbox"/> Structural Engineer         |
| <input type="checkbox"/> Civil Engineering             | <input type="checkbox"/> Pharmacy                    |
| <input type="checkbox"/> Surveying and Mapping         | <input type="checkbox"/> Chemistry                   |
| <input type="checkbox"/> Plumbing and Heating          | <input type="checkbox"/> Agriculture                 |
| <input type="checkbox"/> Steam Engineering             | <input type="checkbox"/> Navigation                  |
|  | <input type="checkbox"/> Mathematics                 |
|  | <input type="checkbox"/> Radio                       |

#### BUSINESS TRAINING COURSES

- |   |   |
|---|---|
| <input type="checkbox"/> Business Management            | <input type="checkbox"/> Advertising                  |
| <input type="checkbox"/> Industrial Management          | <input type="checkbox"/> Business Correspondence      |
| <input type="checkbox"/> Personnel Management           | <input type="checkbox"/> Show Card and Sign Lettering |
| <input type="checkbox"/> Traffic Management             | <input type="checkbox"/> Stenography and Typing       |
| <input type="checkbox"/> Accounting and C.P.A. Coaching | <input type="checkbox"/> English                      |
| <input type="checkbox"/> Cost Accounting                | <input type="checkbox"/> Railway Mail Clerk           |
| <input type="checkbox"/> Bookkeeping                    | <input type="checkbox"/> Common School Subjects       |
| <input type="checkbox"/> Secretarial Work               | <input type="checkbox"/> High School Subjects         |
| <input type="checkbox"/> Salesmanship                   | <input type="checkbox"/> Illustrating                 |
| <input type="checkbox"/> Spanish                        | <input type="checkbox"/> French                       |
|   | <input type="checkbox"/> Cartooning                   |

Name.....

Street Address.....

City..... State.....

Occupation.....

If you reside in Canada, send this coupon to the International Correspondence Schools Canadian, Limited, Montreal

## ELECTRIC LIGHTS ANYWHERE

Household Electrical Appliances.  
Install it yourself. Write for circular.

D. W. ONAN & SONS \$14750  
303 Royalston Ave.  
Minneapolis, Minnesota.

110 Volt—complete plant  
with all wiring, fixtures and  
lamps for 7 rooms \$147.50,  
Direct-To-You.

Ideal for Farms,  
Camps, Summer  
Homes.

Also  
RUBS



## MIRRORS RESILVERED AT HOME

Costs near 5 cents per square foot; you charge 75 cents. Immense profits plating like new brassy, worn-off autoparts, reflectors, tableware stoves, etc. Outfits furnished. Details FREE. Write for information. SPRINKLE, Plater, 94, Marion Indiana.



## Feeding 13,000,000 Radio Sets

(Continued from page 41)

Mr. Aylesworth smiled. "You mean when a speaker in the Democratic national convention was shut off in the midst of a denunciation of the Republican agricultural platform? That was an accident, and a funny one. Some prominent Democratic publishers called me on the telephone from Kansas City to protest. I started an immediate investigation, although I knew it had not been done deliberately.

"I discovered that only the Eastern stations had been cut off. The interruption must have occurred somewhere on the telephone wires connecting these stations. The telephone company engineers traced the break. They found that three small boys near Pittsburgh had climbed a pole and cut out a length of wire to fix a cage for a pet rooster!"

THAT was an accident, as was the breaking down of one of the telephone circuits one night when Secretary Hoover was speaking. But Mr. Aylesworth told me of deliberate attempts to prevent certain messages from getting on the air.

"On the night of Senator Curtis' acceptance speech," he said, "someone telephoned our control room. The man who took down the receiver heard an excited voice exclaim: 'Stop the program! There's an SOS on the air. WEAf is the only station running! Cut off at once!'

"The young man in charge was about to throw the switch, when the chief engineer intervened. He quickly tuned in on other stations. All were running. If the ruse had succeeded, Senator Curtis would have been cut off in the middle of his speech."

Sometimes, when a piece of news of unusual interest or importance is reported, the broadcasting organization itself cuts in on a program. For example, last New Year's Day a California player in the East-West championship football game made a sensational run—in the wrong direction. That was unusual news. A program was interrupted long enough for a brief description of the freak event to be broadcast. In such a case, the sponsor, whose time on the air has been curtailed, is refunded a proportionate part of the sum he paid.

"What happens in the studio when you get an unexpected piece of news or have to go off the air for an SOS?" I asked. "Doesn't it throw your performers out of their stride?"

"Not at all," smiled Mr. Aylesworth. "They never know it. They keep on with their programs just the same. But their microphones are disconnected until the SOS or whatever the interruption may be is out of the way."

IN BROADCASTING, new events from points outside the studio, Mr. Aylesworth told me, "nemo men" play an important role. They set up the microphones at the scene of action, at football fields, ballrooms, banquet halls, theaters, or other places where special programs are broadcast. In New York City alone, there are nearly three dozen of these "nemo" points from which speeches, music, and entertainment are broadcast regularly. All lines from the "nemo" points lead to the control board of the main studio.

When features are sent out from theaters or concert halls, the "nemo" operator must attend several performances or rehearsals in advance to make notes and prepare cues for the actual broadcasting, as well as to plan the arrangement of the microphones. As many as sixteen "mikes" may be employed in a typical theater pick-up.

One hour before a "nemo" program is scheduled to go on the air, the circuits are tested to make sure everything is in order. Fifteen minutes before the opening selection, the lines are again tested. Five minutes before the deadline, the

(Continued on page 154)



Patented

## Just A Twist Of The Wrist

Banishes Old Style Can Openers to the Scrap Heap

HERE is a truly revolutionary invention! Now, all the danger and wastefulness of old-style can openers is ended. Now, every home in the land can open cans automatically the new, simple, safe, easy way by a handy little machine.

Women universally detest the old-style can opener. Yet practically in every home cans are being opened with it, often several times a day. Imagine, then, how thankfully they welcome this new method—the automatic way doing their most distasteful job.

### "Million Dollar" Machine

The Speedo holds the can—opens it—flips up the lid so you can grab it—and gives you back the can without a drop spilled, without any rough edges to snag your fingers—all in a couple of seconds. It's so easy even a 10-year-old child can do it in perfect safety! No wonder women—and men,

too—simply go wild over it. And no wonder Speedo salesmen often sell to every house in the block and make up to \$10 an hour, either spare or full time.

Frankly, I realize that the facts about this proposition as outlined briefly here may seem almost incredible. So I've worked out a special advertising plan by which you can examine the invention and test it without risking one penny of your money.

### Generous Free Test Offer

All I ask you to do is to fill out and mail the coupon below. You do not obligate yourself in any way whatever. Get my Free Offer. All you risk is a 2c stamp—so grab your pencil and shoot me the coupon right now. Address:

Central States Mfg. Co.,  
Dept. M-843, 4500 Mary Ave.,  
St. Louis, Mo.

**SPEEDO**

Central States Mfg. Co., Dept. M-843, 4500 Mary Ave., St. Louis, Mo.  
Yes, rush me the facts and details of your FREE TEST SELLING OFFER.

### AGENTS

FULL OR PART TIME  
We instruct you and furnish everything. Under our plan Orndoff, Va. made \$265 in a week. Greese, Wyo., made \$10.75 in 3 hours. Barclay, N. Y., cleaned up \$117 in only 2 days. Send today for full details and FREE TEST SAMPLE OFFER.

**\$2,000.00 PRIZES**

Now Being Offered.  
Coupon Brings Details.

Name .....  
Address .....  
City ..... State .....  
☐ Check here if interested only in one for your home.

**MAGIC**  
Learn at Home—by Mail! Easily! Quickly!  
New! Different! Teaches you Big Tricks, Illusions, Stage Stunts, "Patter," and the Principles of Magic. Learn at home. Astonish your friends. Write today for full information. Please tell us your age.  
**TARBELL SYSTEM, INC.**  
1926 Sunnyside Ave. Studio 13-67  
Chicago, Illinois

**BOYS Earn Men's Wages as AUTO MECHANICS**  
Every city, town, and farming community is crying for auto and tractor men—trained the McSweeney Auto School way, to know cars and tractors inside out. Only 8 weeks of fascinating training in my famous shop-school fits you. No books or lectures. Learn on real machines. Write today for remarkable tuition offer, and BIG FREE BOOK.  
**McSweeney Auto, Tractor & Dept. Aviation Schools A-13-K**  
Chester at 30th St. Cleveland, O., or 203 Madison St. Memphis, Tenn.

**BIG PROFITS SELLING TIES!**  
Even beginners make big money taking orders for amazing new Supra Value Tie Line. Just show attractive FREE Sample Outfit, and the rest is easy. Smartest styles, sturdy fabrics, and factory prices make them sell on sight. Made in our own big mills. Add ional line of Broadcloth Shirts adds to your profits. Full or part time. Best proposition yet. Lowest prices; highest commissions.  
**Send For Free Outfit**  
Begin taking orders now. Free Tie and Shirt Outfit with selling instructions starts you. No experience needed. Nothing for you to buy. Write today.  
**SUPRAVALUE SHIRT CO. Inc.**  
4925-P. Hudson Blvd.  
No. Bergen, N. J.

## Travel on "Uncle Sam's Payroll" RAILWAY POSTAL CLERKS MAIL CARRIERS

(City and Rural)

**\$1700 to \$3300 Year—**

**MEN—BOYS, 17 UP SHOULD MAIL COUPON IMMEDIATELY**

**Steady Work. No Layoffs. Paid Vacations.**



FRANKLIN INSTITUTE  
Dept. A271 Rochester, N.Y.


First: Rush to me WITHOUT CHARGE 32-page Book with list of U.S. Government positions open to men and boys, and full particulars telling how to get them.

Name .....

Address .....



# MAKE MONEY DRAWING!

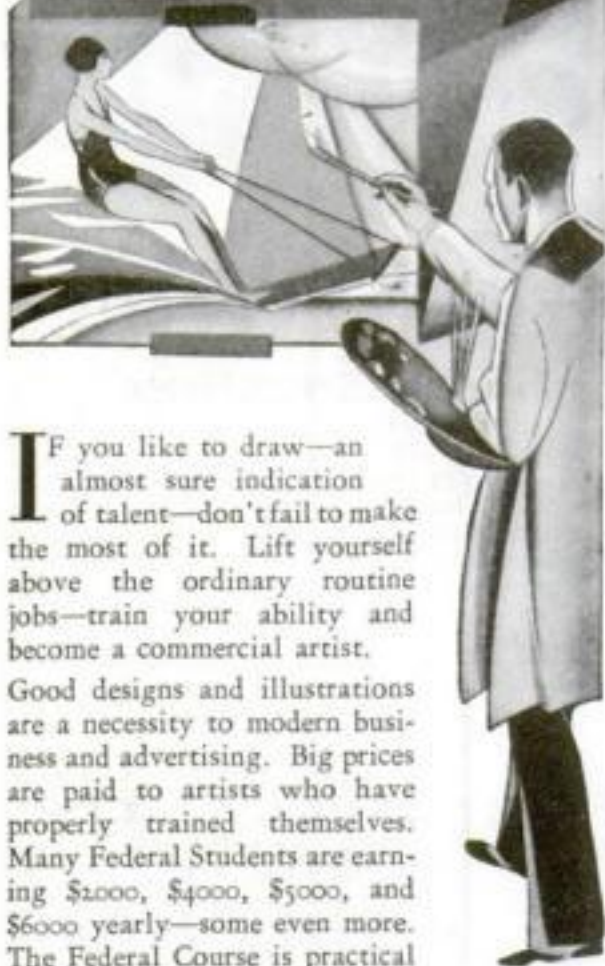

If you like to draw—an almost sure indication of talent—don't fail to make the most of it. Lift yourself above the ordinary routine jobs—train your ability and become a commercial artist.

Good designs and illustrations are a necessity to modern business and advertising. Big prices are paid to artists who have properly trained themselves. Many Federal Students are earning \$2000, \$4000, \$5000, and \$6000 yearly—some even more. The Federal Course is practical from A to Z, and gives you personal criticisms on your lessons.

## How to Test Your Artistic Ability

Here is an interesting, easy way to learn if your talent is worth developing. Send for our Art Ability Questionnaire, prepared by successful artists to test your natural sense of design, proportion, color, perspective, etc. You can do this without obligation, and you will be frankly told what your score is. We will also send you our book, "YOUR FUTURE," showing work by Federal Students and describing the Course in detail.

### Send Coupon Now for Complete Information



Investigate! Send coupon now for your questionnaire and copy of our book "YOUR FUTURE" Don't Delay!

**FEDERAL SCHOOL**  
of Commercial Designing  
1365 Federal Schools Bldg.,  
Minneapolis, Minn.

Please send me FREE your Art Questionnaire and book, "YOUR FUTURE."

Name .....

Age..... Present Occupation .....

Address.....

## Feeding 13,000,000 Radio Sets

(Continued from page 153)

"nemo" operator is given his cue to stand by.

Besides the regular "nemo" points with more or less permanent equipment, there are special points for special features. When Lindbergh returned from France, for example, radio reporters were stationed before microphones at the Washington Navy Yard, on the steps of the U. S. Treasury, on top of the Washington Monument, in the cupola of the Capitol, and at the flying field in Washington, so that every step of his progress could be reported.

In this way chain broadcasting covers the great news events whenever they can be anticipated.

A striking example of how a national hook-up can cover an important event, allowing speakers in all parts of the country to participate, was the opening of the Cascade Tunnel of the Great Northern Railroad, last January. Ralph Budd, president of the company, spoke from the tunnel's mouth, in the state of Washington. Then a member of the Interstate Commerce Commission spoke from Washington, D. C. General W. W. Atterbury, president of the Pennsylvania Railroad, spoke from Philadelphia; Madame Schumann-Heink sang from San Francisco; an orchestra played in New York; and Herbert Hoover, then Secretary of Commerce, closed the program with an address from Washington, D. C. There were twelve switches across the continent to make up a single program lasting one hour.

BROADCASTING news features is but one phase of the "unsponsored" programs paid for by the broadcasting company itself instead of by an advertiser.

"The main purpose of broadcasting," Mr. Aylesworth said, "is not to make money. It is to give the public such increasingly better programs that people will continue to buy and use radio sets and tubes. And that works to the advantage not only of the manufacturing companies whose money is invested in the National Broadcasting Company, but to all makers of radio equipment, and the general public as well.

"I believe the time will never come when all radio programs will be sponsored by advertisers. There are certain public services that broadcasters must render if they are to continue in business. Sending out religious services is an example. We make no charge for broadcasting those. I believe the number of people who listen to Dr. Cadman, Dr. Fosdick, Dr. Poling, and Rabbi Wise is greater than the total church attendance in the United States.

"THEN there are addresses by public officials. When the President of the United States speaks, we feel it our duty to give everybody a chance to hear him. The same is true for lesser officials on special occasions. Again, there is the noonday agricultural bulletin service prepared by the experts of the U. S. Department of Agriculture. It produces no revenue for us, but it reaches a great public which has signified its interest by writing us tens of thousands of letters. We also broadcast without charge the important sporting events, and many kinds of musical programs. We have one feature, 'Cheerio,' a brief inspirational talk every morning at half past eight which thousands of radio listeners regard as the most valuable thing they hear. We know that because of the letters we get—more than 100,000 a month. When 'Cheerio' last spring suggested that perhaps people were getting tired of hearing him, we got 56,000 letters in one day begging us not to let him stop."

For these unsponsored entertainment and educational programs, supplied by the broadcasting company; each associate station is charged forty-five dollars an hour. They are at liberty to use as

(Continued on page 156)

## GET A GRIP OF STEEL



**Double Strength Krusher Grip**  
Will increase the strength and size of your arm

Send 25 cents for a KRUSHER GRIP and we will send you FREE

A beautifully illustrated booklet which tells you how to develop your muscles in chest, neck, arms and legs. How you can build up your energy and power.

Some of the world's greatest athletes posed for photos for this booklet.

Fill in the coupon and mail with your remittance today.

This offer is only good for 30 days. A Krusher Grip and with it this wonderful book for 25 cents.

## The Jowett Institute of Physical Culture

422 Poplar St, Dept. 29X, Scranton, Pa.

Dear Mr. Jowett:

Enclosed is 25 cents for your double strength Krusher Grip with which I am to receive your illustrated booklet FREE.

Name .....

Address .....

29X

## "14 WORDS OF MAGIC POWER" FREE

—that is what the multi-millionaire gave to the young man who saved his life. 14 WORDS that created the rich man's millions. The young man used them. They made him worth a quarter of a million dollars in 5 years. Do you want to know what these words were—and how you can use them? A fascinating little book tells the story. It is yours free IF you are a young man 16 to 32 years of age and willing to consider using a part of your spare time preparing for a worth-while position in the big pay fields of Drafting, Engineering, Electricity or Architecture through any one of these three plans:

1. 1, 2 or 3 year training at Chicago Tech. Diplomas and B. S. Degrees. Opportunities for self-support. Day and Evening classes.
2. A short 4 months' special course in Drafting. Quick preparation. We help you secure position when through training.
3. Train at Home in Drafting. Keep your present job and prepare for a better one in spare time. All tools supplied without extra cost.

This Free Book is yours.—If you write for it and indicate the plan (by number) that interests you.

Address: Dept. N-82, CHICAGO TECHNICAL COLLEGE  
118 East 26th Street, Chicago, Illinois



### VOICE

**100% Improvement Guaranteed**

Send today for free Voice Book telling about amazing New SILENT Method of Voice Training. Increases your range, your tone qualities, banish huskiness and hoarseness. Learn to sing with greater ease. 100 o/o improvement guaranteed—or money back. Write today for free booklet—one of the greatest booklets on voice training ever written.

**PERFECT VOICE INSTITUTE, Dept. 13-67**  
1922 Sunnyside Ave., Chicago



# Will You Accept a 1929 ATLAS

Given to readers of Popular Science Monthly who take advantage of this offer now made in connection with

## Webster's New International Dictionary

The Merriam Webster

The "Supreme Authority"

A complete reference library in dictionary form, with 3000 pages and type matter equivalent to a 15-volume encyclopedia, all in a single volume, can now be yours on the following remarkably easy terms:

The Entire work (with 1929 ATLAS)

**Delivered for \$1.00**

and easy monthly payments thereafter (on approved orders in United States and Canada). You will probably prefer the beautiful India-Paper Edition which is

**Reduced About One-Half**

in thickness and weight as compared with the Regular Paper Edition

Over 408,000 Vocabulary Terms and in addition, 12,000 Biographical Names, nearly 32,000 Geographical Subjects, 3,000 pages, 6,000 illustrations.


Constantly improved and kept up to date. "To have this work in the home is like sending the whole family to college." To have it in the office is to supply the answers to countless daily questions.

To Those Who

Send This

Coupon

NOW!

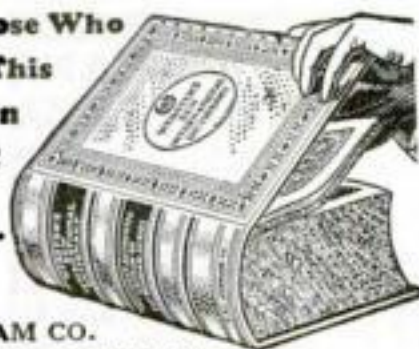

G. & C. MERRIAM CO.

Dept. S., Springfield, Mass.

Please send me free of all obligation or expense, complete information, including "125 interesting Questions" with references to their answers, striking "Facsimile Color Plate" of the new bindings, with terms on your Special Offer on Webster's New International Dictionary to readers of Popular Science.

10-29

Name.....

Address.....

## Feeding 13,000,000 Radio Sets

(Continued from page 154)

many or as few of the unsponsored hours as they desire.

I wanted to know how many people are reached by chain broadcasting.

"We can make a pretty close calculation," Mr. Aylesworth answered. "Manufacturers tell me that about 13,000,000 sets are now in use and that this year's sale of 5,000,000 or more, after allowing for replacements, will increase the number being used to more than 15,000,000. Allowing only a fraction over three persons to each set, we have a possible radio audience of 50,000,000 in the United States.

"INTERNATIONAL broadcasting is coming," said Mr. Aylesworth. "I have just returned from Europe, where I looked into that possibility. Though few European stations are equipped yet to render effective service, I found them all interested in our musical programs and in our public addresses. Even on the Continent, there is a rapidly growing audience which understands English."

One curious thing about English radio sets, Mr. Aylesworth related, is that headphones are used with most of them. There are few loudspeakers. In the British Isles, radio is almost universally called "wireless." When it is called "radio" the word is pronounced with a short "a" as if it were spelled "raddio." During the last presidential campaign, many people made fun of Governor Smith for speaking of the "raddio." Apparently, he had authority for the pronunciation.

Already international broadcasts are meeting with considerable success, I was told. Features from New York are rebroadcast by short waves from stations KDKA, in Pittsburgh, Pa., and WGY, in Schenectady, N. Y. As a result, South America is getting many of our programs.

"In these experiments," said Mr. Aylesworth, "we have learned some surprising things. For instance, in the north-and-south direction, the short-wave system seems to work pretty well. Eastward and westward, however, the results are not so good. The British Broadcasting Company made great preparations to pick up President Hoover's inaugural address, but all they got clearly was the administration of the oath of office by Chief Justice Taft.

"ANOTHER strange thing is that the power of a station sometimes doesn't seem to have much to do with its range. Take our principal station, WEA, as an illustration. It is located on Long Island twenty-two miles from New York. Its power is fifty kilowatts, but its signals arrive in Manhattan with an energy of only five kilowatts, and some parts of the city cannot pick them up at all. Station WOR, in Newark, N. J., has only five kilowatts of power, but reaches some parts of New York better than WEA does. Radio engineers can only partly explain such things. They are mysteries that will have to be solved before international radio becomes entirely dependable."

"And new developments in broadcasting?" I asked in parting.

"The presentation of drama over the radio is one thing. Experiments in that direction have met with wide approval. Great plays can be rearranged to carry their appeal through the ear alone. We are also looking forward to sound movies, broadcast from radio stations and received in the home. I doubt whether we will have successful visual presentation by television of events as they occur. Engineers tell me that there are almost insurmountable technical difficulties in the way of such transmission. But we expect, some day, to present the face, and perhaps the figure, of the speaker before the microphone, though not life-size."

"I don't know just how to put it, express it I mean--but you'll understand I hope. I was dancing with Miss--er--I can't think of her name--but you know who--when Bill hit us--bumped into us I mean, and--"



## Don't BE A WORD FUMBLER all your Life!

PEOPLE dislike talking with you if you are always groping for the right words--always stammering and saying "er--er" or "you know what I mean." Your poverty-stricken vocabulary makes you appear stupid, even though you are not.

But if you express your thoughts smoothly and easily, never hesitating for the right word, everybody realizes that you have an alert, active brain, and are well-educated. Your happy freedom of expression gives your personality a chance to "get across."

### Stop Groping for Words

Every time you talk, every time you write, you show the extent of your education and culture. When you use the wrong word, when you mispronounce or misspell a word, when you punctuate incorrectly, when you use flat, ordinary words, you handicap yourself more than you will ever know. For people are too polite to tell you about your mistakes.

To achieve your ambitions it is essential that you use good English as instinctively as you tie your shoes. Business today demands men and women who use correct, concise, forceful language. Society demands education and culture, demonstrated by the use of correct, interesting, and convincing language.

For many years Mr. Cody, one of our greatest authorities on English, studied the problem of creating instinctive habits of using good English. After countless experiments he finally invented a simple method by which you can acquire a better command of the English language in only 15 minutes a day.

### Send for Free Book on English

A new book explaining Mr. Cody's remarkable method is ready. If you are ever embarrassed by mistakes in grammar, spelling, punctuation, pronunciation, or if you cannot instantly command the exact words with which to express your ideas, the new free book, "How to Speak and Write Masterly English," will prove a revelation to you. Send the coupon, a letter, or a postal card for it now. SHERWIN CODY SCHOOL OF ENGLISH, 1810 Searle Building, Rochester, N. Y.

Sherwin Cody School of English  
1810 Searle Building, Rochester, N. Y.

Please send me your free book, "How to Speak and Write Masterly English."

Name.....

Address.....

## "STAMMERING

### Its Cause and Cure"

You can be quickly cured if you stammer. Send 10 cents, coin or stamps, for 288-page cloth bound book on Stammering and Stuttering. It tells how I cured myself after Stammering and Stuttering for 20 years.

BENJAMIN N. BOQUE

11870 Bogue Bldg., 1147 N. Ill. St. Indianapolis

## LAW STUDY AT HOME

Become a lawyer. Legally trained men win high positions and big success in business and public life. Be independent. Greater opportunities now than ever before. Big corporations are headed by men with legal training. Earn \$5,000 to \$10,000 Annually.

We guide you step by step. You can train at home during spare time. Degrees of LL.B. conferred. LaSalle students found among practicing attorneys of every state. We furnish all text material, including fourteen-volume Law Library, Law book, easy terms. Get our valuable 64-page "Law Guide," and "Evidence" books FREE. Send for them NOW.

LaSalle Extension University, Dept. 1083-L Chicago  
The World's Largest Business Training Institution

## ELECTRICAL ENGINEERING

Intensive, practical--technical courses. Engineering degree in 2 years. Diploma in 1 year. Also Special Short Courses in Practical Electricity--Power Plant Operation--Armature Winding--Radio--Electric Refrigeration--Aviation--Electricity--Electric Welding. LOW TUITION RATES. Faculty of recognized experts. Extensive Laboratories. Free employment service for graduates. Part-time work secured during training. 5th year. Write for catalog, FINLAY ENGINEERING COLLEGE, 1001-B Indiana Ave., Kansas City, Mo.





# A NEW Edition

Thoroughly revised—greatly enlarged and offering a wealth of new, up-to-the-minute information

## THE RADIO MANUAL

Revised Edition

Complete new chapters on aircraft radio equipment; Practical Television and Radiomovies with instructions for building a complete outfit; radio interference; 100% modulation; latest equipment of the Western Electric Co.; the Marconi Auto-Alarm System; and many other developments of the past year. All this information is added in the new edition and, besides, the entire book has been brought right up to date with much new material. The Radio Manual continues to be the one complete and up-to-the-minute handbook covering the entire radio field.



### A Complete Course in a Single Volume

20 big chapters cover: Elementary Electricity and Magnetism; Motors and Generators; Storage Batteries and Charging Circuits; The Vacuum Tube; Circuits Employed in Vacuum Tube Transmitters; Modulating Systems and 100% Modulation; Wavemeters; Piezo-Electric Oscillators; Wave Traps; Marine Vacuum Tube Transmitters;

Radio Broadcasting Equipment; Arc Transmitters; Spark Transmitters; Commercial Radio Receivers; Marconi Auto-Alarm; Radio Beacons and Direction Finders; Aircraft Radio Equipment; Practical Television and Radiomovies; Eliminating Radio Interference; Radio Laws and Regulations; Handling and Abstracting Traffic.

An immense amount of information never before available including detailed descriptions of standard equipment is presented.

### Prepared by Official Examining Officer

The author, **G. E. Sterling**, is Radio Inspector and Examining Officer, Radio Division, U. S. Dept. of Commerce. The book has been edited in detail by **Robert S. Kruse** for five years Technical Editor of QST, the Magazine of the American Radio Relay League. Many other experts assisted them.

### Free Examination

The New Edition of "The Radio Manual" has just been published. It contains 900 pages and 369 illustrations. Bound in Flexible Fabrioid. The coupon brings the volume for free examination. If you do not agree that it is the best Radio book you have seen, return it and owe nothing. If you keep it, send the price of \$6.00 within ten days.

Order on This Coupon

**D. Van Nostrand Co., Inc.,**  
250 Fourth Ave., New York

Send me the Revised Edition of THE RADIO MANUAL for examination. Within ten days after receipt I will either return the volume or send you \$6.00, the price in full. (P.S.M. 10-29)

Name.....  
St. & No.....  
City and State.....

### Here Are Correct Answers to Questions on Page 70

1. The light sensitive material on the celluloid film consists of a mixture of gelatin and silver bromide. In some way not yet fully understood, the light falling on the silver bromide causes a molecular change in its structure which cannot be detected by ordinary means but the effect of which shows up in the development of the plate. The silver bromide which has been exposed to light is acted on by the developing agent and reduced to metallic silver in such a finely divided state that it appears black. The silver bromide not exposed to the light is not affected by the developer and subsequently is dissolved away by the hyposulphite of soda solution called the fixing bath.

2. The difference between a fast lens and a slow lens is not in the material of which the lens is made. A fast lens is one which will focus a sharp picture with a relatively large opening, so that a greater amount of light is allowed to strike the sensitive plate. With a fast lens, therefore, the exposure is shorter, because the silver bromide is more rapidly affected by the stronger light coming through the larger opening.

3. Daguerre and Niepce made the first photograph in 1839.


4. The focal length of a lens determines the size of the image which will be produced on the plate. The shorter the focal length the smaller the image on the plate if the distance from the object photographed to the lens remains constant. The proper focal length of a lens, therefore, is such that the view embraced within an angle of forty-five to fifty degrees will be reproduced on a plate of the size you wish to use. This means, roughly, a lens of eight and one quarter inch focal length for a five by seven plate or of six-inch for a four by five plate, and so on. If a longer focal length lens is used the angle of view embraced by the camera will be smaller than forty-five or fifty degrees.

5. Pictures of sporting events are usually taken with cameras equipped with focal plain shutters. Such a shutter consists of a curtain with a thin horizontal slit in it which travels from top to bottom, in front of and close to the plate in the camera. The entire plate, therefore, is not exposed at exactly the same moment, and, as the image is projected on the plate upside down, the wheels of a racing car, for instance, are exposed on the plate before the upper part of the body. In the meantime the car has moved slightly, so that the wheels are photographed when the car is in one position, and the upper part of the body when it is in another.

6. Special lenses are needed to take colored movies only in the sense that a very fast lens is necessary. Such a lens will work equally well for ordinary photography without color. The high-speed lens is necessary because in front of the lens must be placed colored filters which cut down the effect of the light to such an extent that much more light is needed.

7. The maximum size of a sharply defined enlargement depends entirely on the sharpness of details in the original picture. If the original picture is very sharp there is no practical limit to the size of the enlargement which can be made, for the larger the enlargement, the farther away the observer will naturally stand when looking at it, so that the detail will apparently remain as in the original picture.

8. Besides the fact that an anastigmat lens is faster than a cheaper lens, it gives much sharper definitions, (Continued on page 167)



## FREE Saxophone Book

Just send us your name and address and we will mail free and postpaid our new Saxophone Book. It explains and illustrates all Saxophones—gives first lesson chart—shows how exclusive Buescher improvements make it easier for you to play a

### BUESCHER

### True-Tone Saxophone

In one hour you can play the scale—in a few weeks you can play popular music—many join bands or orchestras in 90 days. No other wind instrument is so easy to learn and none more beautiful.

### Easy to Play Easy to Pay

The Saxophone harmonizes beautifully with piano—is great for solos, duets, quartettes and sextettes. It is ideal for home entertainment, lodge, church or school playing. Hundreds make big money playing in Dance Orchestras and on Radio Programs.

**6 Days' Free Trial** in your own home how easily you can learn to play a Buescher Saxophone. Small down payment and a little each month lets you play while you pay. Write for the Free Buescher Saxophone Book today.

**BUESCHER BAND INSTRUMENT CO.**  
2859 Buescher Block (539) Elkhart, Ind.

## PATENTS TO THE MAN WITH AN IDEA

PATENTS Procured. Trade Marks Registered. —A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request.

**IRVING L. McCATHRAN**  
PATENT LAWYER

Formerly with and successor to  
**Richard B. Owen**

705 International Bldg., Washington, D.C.  
41-D, Park Row New York City

### TRADE-MARKS REGISTERED

## A NEW CAR in 30 minutes

GET the BEAUTY and LUSTRE of a NEW PAINT JOB at a small fraction of the cost. Do it Yourself with **NUKAR**, NOT a Wax, Paint or Polish. This New Chemical Discovery instantly restores original color to dull faded automobiles and adds a Beautiful, Brilliant, Lustre, that lasts for months. No rubbing!—No hard work!—Flows on like water from a sponge—No waiting. Drive a NEW CAR the Same Day. Results Guaranteed. **MEN! Amazing Cash PROFITS** are being made by Agents, Distributors and Service Station operators. Earn up to \$50 a day. Make a sensational sales compelling Demonstration. We back you to the limit and give you FREE a Business Start that money could not buy. Let us send prepaid and without charge a FREE SAMPLE and our Big Book in colors. ACT NOW. Write Today.

**ATLAS SOLVENT CO.,** 5647 Harper Ave., Dept. 171, CHICAGO, ILL.

**PATENTS** As one of the oldest patent firms in America we give inventors at lowest consistent charge, a service noted for results, evidenced by many well known Patents of extraordinary value. Book, Patent-Sense, free. **Lacey & Lacey** 648 F St., Wash., D.C. Estab. 1869.

## PATENTS

Trade-marks, Copyrights, Patent Litigation, Handbook with illustrations, 100 mechanical movements. Sent free on request.

**ALBERT E. DIETERICH**

Formerly member Examining Corp. U. S. Patent Office  
Registered Patent Lawyer and Solicitor  
30 years' experience  
681-A Ouray Bldg. Washington, D. C.

Copyrighted material



## Here Are Correct Answers to Questions on Page 70

(Continued from page 156)

particularly near the edges of the picture. The ordinary cheap rapid rectilinear lens focuses sharply only at the center of the picture, whereas the anastigmat lens covers the entire plate with great sharpness.

9. Stereoscopic pictures are taken in a camera fitted with two lenses separated at the same distance as are the human eyes. Consequently when you look at a stereoscopic picture through the proper lenses the view appears exactly as you would have seen it if you had stood in front of the camera when the exposure was made. The eyes automatically superimpose one view over each other, so that near and far objects bear the same relation to each other in the picture as in the actual scene.

10. The speed of a lens, or the rapidity with which it will properly expose for any given picture, depends on the opening through the lens. The "f" stands for focus. An f/8 lens, for instance, is one in which the largest stop, or opening in the diaphragm, is one-eighth of the focal length. An f/8 lens, for instance, of eight-inch focal length, could use as its largest stop a diaphragm with an opening one inch in diameter. An f/6.3 lens of the same focal length could use a maximum stop or diaphragm opening of 1.269 inches.

## A New Slant on House Painting

(Continued from page 77)

be painted for the same reason, and so will the top and bottom edges of the doors. Going to varnish the floors?"

"I don't know. Is that the thing to do?"

"Yes, if they're wood. I go over an oak floor twice with filler to fill the pores, and then give it three coats of the best varnish I can get. Wax it, and you'll have a floor to be proud of. Your inside walls are to be plaster, I take it, and I recommend flat paint, maybe stippled."

"Flat paint? What's that? Doesn't all paint lie flat?"

"That's not the kind of flat I mean," Martin smiled. "Paint with no shine is what I'm talking about. You see, when you make paint with linseed oil it dries with a gloss, and you can't get anything better to use outdoors, because it turns the weather. But people don't like shiny walls inside; they prefer a dull finish—flat. That kind of paint is made with turps instead of linseed, or some other kind of oil that doesn't gloss. The trim is different. That can be glossy; glossier than paint, even; so it's generally enameled. Enameling used to be a fussy job. But there are new enamels out that only take four hours to dry and are so easy to put on that anyone can do it."

"Is that the stuff called lacquer?"

"No, that's something else. Enamel is made with linseed oil, but lacquer has the same stuff in it as celluloid. When lacquer came out everybody began to use it because it dried so fast; you could lacquer a chair and use it in half an hour. But then enamel was made to dry almost as fast, and now lacquer is used mostly for furniture and small things, and enamel for trim and big surfaces. Lacquer is used on floors, too, because it's so hard."

To Bob, the advice of his painter friend was a revelation, for where he had thought of paint only for its appearance, he now recognized it as a powerful agent of preservation against rot and rust. The economy of a paint job, he saw, was not in its first cost, but in the length of time it would last, and so he counted himself fortunate in having the painting of his new house in the hands of so competent a man as Jim Martin.


# PATENTS

## INVENTORS

Write for these FREE BOOKS!

At the left is a view of my drafting and specification offices where a large staff of experienced experts is in my constant employ. All drawings and specifications are prepared under my personal supervision.

MY PATENT LAW OFFICES  
OPPOSITE  
U.S. PATENT OFFICE




## Protect Your Ideas Take the First Step Today

If you have a useful, practical, novel idea for any new article or for an improvement on an old one, you should communicate with a competent Registered Patent Attorney AT ONCE. Every year thousands of applications for patents are filed in the U. S. Patent Office. Frequently two or more applications are made for the same or substantially the same idea (even though the inventors may live in different sections of the country and be entirely unknown to one another). In such a case, the burden of proof rests upon the last application filed. Delays of even a few days in filing the application sometimes mean the loss of a patent. So lose no time. Get in touch with me at once by mailing the coupon below.

### Prompt, Careful, Efficient Service

This large, experienced organization devotes its entire time and attention to patent and trademark cases. Our offices are directly across the street from the U. S. Patent Office. We understand the technicalities of patent law. We know the rules and requirements of the Patent Office. We can proceed in the quickest, safest and best ways in preparing an application for a patent covering your idea. Our success has been built on the strength of careful, efficient, satisfactory service to inventors and trademark owners located in every state in the Union.

### Strict Secrecy Preserved— Write Me in Confidence

All communications, sketches, drawings, etc., are held in strictest confidence in strong, steel, fireproof files, which are accessible only to authorized members of my staff. Feel free to write me fully and frankly. It is probable that I can help you. Highest references. But FIRST—clip the coupon and get my free book. Do THAT right now.

### No Charge for Information on How to Proceed

The booklet shown here contains valuable information relating to patent procedure that every inventor should have. And with it I will also send you my "Record of Invention" form, on which you can sketch your idea and establish its date before a witness. Such evidence may later prove valuable to you. Simply mail the coupon and I will send you the booklet and the "Record of Invention" form, together with detailed information on how to proceed and the costs involved. Do this NOW. No need to lose a minute's time. The coupon will bring you complete information entirely without charge or obligation.

### Clarence A. O'Brien Registered Patent Attorney and Attorney-at-Law

Member of Bar of Supreme Court of the United States; Court of Appeals, District of Columbia; Supreme Court, District of Columbia; United States Court of Claims.  
Practice confined exclusively to Patents, Trademarks, and Copyrights



**Clarence A. O'Brien**  
Registered Patent Attorney  
and Attorney-at-Law  
88-M Security Savings and Comm'l Bank Bldg., Wash., D. C.  
— or —  
Suite 1106, Woolworth Bldg., New York City

Please send me your free book, "How to Obtain a Patent," and your "Record of Invention" form without any cost or obligation on my part.

Name.....

Address.....

(Important: Print or Write name clearly)



# "I Gambled 2¢ and Won \$35,840 in 2 YEARS"



## A Story for Men and Women who are dissatisfied with Themselves

TWO years ago my earnings were \$2,080 per year! I was discontented, unhappy. I was not getting ahead. And I wanted the luxuries of life like other people.

But it all seemed hopeless. I was beset with fears—afraid of losing my job—afraid of the future. I was "scatterbrained." I had a thousand half-baked ideas to make more money, but acted on none of them.

Today I have an income of \$20,000 a year—\$17,920 more than it was two years ago. A difference of \$35,840.

Once I wandered through life aimlessly. Today I have a definite goal and the will to reach it. Once I looked forward hopefully to a \$5-a-week increase in salary. Today I look forward confidently to a \$100-a-week increase in my earnings.

What magic was it that changed my whole life? Here's the answer in one word—Pelmanism. I gambled 2¢ on it. Yet without it, I might have stayed in a rut for life.

Pelmanism taught me how to think straight and true. It focused my aim on one thing. It dispelled my fears—improved my memory. Initiative, organizing ability, forcefulness were a natural result. Inertia disappeared—so also mind-wandering and indecision. With new allies—and old enemies beaten—I was prepared for anything.

I want other average men to gamble 2¢ as I did. For the cost of a postage stamp I sent for the booklet about Pelmanism, called "Scientific Mind Training." Reading that free book started me on my climb.

The Pelman Institute will be glad to send a copy of "Scientific Mind Training" to any interested individual—FREE. It explains Pelmanism—tells how it has helped over 700,000 people during the last 25 years. World figures like T. P. O'Conner, Frank P. Walsh, Prince Charles of Sweden and many others praise this book—which may completely alter your own life. And it's FREE. No obligation. Simply mail coupon NOW.

THE PELMAN INSTITUTE OF AMERICA  
71 West 45th Street, Suite 8710, New York

THE PELMAN INSTITUTE OF AMERICA  
Suite 8710, 71 West 45th St., New York City

Please send me without obligation your free booklet "Scientific Mind Training." This does not place me under any obligation and no salesman is to call on me.

Name .....

Address .....

City ..... State .....

## Fish Kept Fresh 1,500 Miles from Sea

(Continued from page 58)

it back again. The result is a compact refrigerating system controlled by a thermostat that automatically holds the interior of the car at any desired temperature, whether it is twenty degrees for frozen fish or forty degrees for canteloupe.

In a recent experiment, a shipment of ten tons of frozen fish was sent from Groton, Conn., to Fort Worth, Texas, where it arrived after eleven days, with the temperature of the contents at fourteen degrees—four degrees colder than when they started. After this experiment, the frozen fish firm that made the shipment ordered an entire fleet of the new refrigerator cars.

Supplementing these rail carriers are motor trucks that provide winter cold for meat and fish. Striking in appearance, they are painted shiny aluminum or pure white to reflect away outside heat. One type keeps its interior cold with blocks of "dry ice," an artificial snow at 109 degrees F. below zero. Lowered through hatches in the top for transporting ice cream, they can maintain a temperature of six degrees F. Fifteen degrees is cold enough for frozen fish. Other trucks use mechanical refrigerating plants with compressors run from the drive shaft, or silica gel cooling systems like that of the new-type freight car. One novel system places cans of frozen brine—really "salt-water ice"—within the compartment of a motor truck or motorcycle with delivery compartment, and maintains the chamber at temperatures as low as two degrees.

COLD storage trucks such as these operate over considerable distances, as between Chicago and Milwaukee and between Exmore, Va., and New York City—the latter a run of fifteen hours or less for a fast truck. They carry all manner of perishable goods, from butter to frozen fruit. One unusually large truck used by a Brooklyn, N. Y., firm of packers transports eight tons of meat chilled to forty-five degrees or lower.

Refrigerator cabinets for retail stores complete the chain of low temperature handling from factory to buyer. These convenient little metal boxes, which stand in the corner of a grocery store, are kept cold with dry ice. They keep packages of products such as frozen fish ready for the customer. Here, then, is a sort of sub-freezing "underground railway" that keeps food fresh from the factory to the home.

Storage yards and depots along this imaginary railroad are the cold storage warehouses, the great food reservoirs whose combined chilling power in the United States is equivalent to the melting of about a million tons of ice a day. The average warehouse keeps almost half its rooms at less than zero, and none of them at more than thirty-four degrees. And not a single cake of ice will you find anywhere in the building. Instead, a maze of pumps and compressors forces chilling ammonia through the pipes and maintains the rooms at a dry, searing cold.

STRANGE things are kept in these cold storage rooms—nuts, furs, ink, plant seeds. Even a consignment of rattlesnakes once went into cold storage in a Southern state. Imagining winter had come they hibernated and remained in their winter slumber until they were sold, thus disposing of what might have been an embarrassing storage problem.

The boon of cold storage is that it enables surplus food products obtained in times of plenty to be held over until a time when the supply is scarce. The result is that prices are stabilized and a plentiful supply at all times is assured. And as for the familiar question, "Are things kept in cold storage as wholesome as fresh foods?" the Food Research Laboratory of the Bureau

(Continued on page 159)

## PATENTS TRADE-MARKS

### SERVICE

Without charge or obligation, we will inform you on any questions you may put to us touching on patent, trade-mark and copyright law. You may ask: "Should I protect myself by patent, or register under the trade-mark or copyright laws?" What kind of a patent should I obtain?" and many other questions that may occur to you. These are vital points to consider and questions will be cheerfully answered.

### Don't Lose Your Rights To Patent Protection

Before disclosing your invention to anyone send for blank form "EVIDENCE OF CONCEPTION" to be signed and witnessed. As registered patent attorneys we represent hundreds of inventors all over the United States and Canada in the advancement of inventions. The form "Evidence of Conception," sample, instructions relating to obtaining of patents and schedule of fees sent upon request.

### LANCASTER & ALLWINE

274 Ouray Building  
Washington, D. C.

Originators of forms, "Evidence of Conception"



## \$300,000 FOR THIS INVENTION

That's what Eastman Kodak paid for the Autographic idea. Thousands of other inventions are needed and offer enormous opportunities for earning fortunes. If you are of an inventive turn of mind why not concentrate on things that are really

NEEDED. Get Raymond Yates's new book.

### "1000 Needed Inventions"

Costs only \$1.50 and may start you thinking along the right lines. You'll get nowhere just fusing around. Concentrate on what the industries need, and on what the public wants. Mr. Yates's book tells you what these things are. Send no money. Just write postal. Pay mail man \$1.50 plus postage when book arrives. Your money back if you want it. This offer limited. Write now and get on the right track. Outside U. S., \$1.70. Cash with order. Address.

Bureau of Inventive Science  
Dept. 210 Wisner Building Rochester, N. Y.

## MAKE MUCH MONEY

Making and Selling Your Own Goods. Formulas by experts. Manufacturing Processes. Trade Secrets. All kinds. All lines. Automobile Specialties. Cleaning and Polishing Compounds. Food Products. Toilet Preparations, etc. Send for interesting catalog, special circulars, FREE.

C. THAXLY CO., Washington, D. C.

## UNPATENTED IDEAS CAN BE SOLD

I tell you how and help you make the sale. Free particulars. (Copyrighted)

Write W. T. Greene,

921 Barrister Bldg., Washington, D. C.

## INVENTORS

We have been in business 30 years. If your invention or patent has merit, send details or model, or write for information. Complete facilities. References.

ADAM FISHER MFG. CO.  
183-D Enright, St. Louis, Mo.

## SCIENCE NEWS-LETTER

If you enjoy a magazine just popping with rare news, read this weekly. Through its pages we have sown all science. Each is covered by specialists with news for the unique, who write in a lively entertaining style. Within 14 days Science News-Letter rushes to you all advance, authentic, scientific information.

Introductory offer, \$2 for 6 months  
2175 B Street, N. W. Washington, D. C.



## Fish Kept Fresh 1,500 Miles from Sea

(Continued from page 158)

of Chemistry at Washington, D. C., has gone to some pains to answer it.

It finds that, with today's modern facilities, poultry, meat, fish, butter, and eggs can be stored from nine to twelve months without even appreciable loss in flavor—and much longer without loss in food value or wholesomeness.

As a matter of fact, this is far in excess of the actual time such articles are stored. The average for most of the principal food products is less than six months. To give a few typical figures, eggs are usually kept slightly less than six months; beef, about two and a half months; poultry, two and a half months; mutton, four and a half; fish, six and a half.

The chemists also found that a chicken is more likely to spoil after only a couple of days in the housewife's icebox than after fourteen days in the well-chilled box of the wholesaler, or after eight months in the freezer of the cold storage warehouse where the temperature is about ten degrees F. Eggs six months in cold storage cannot be told from fresh ones; the test has been tried many times.

Moreover, only foods of the finest quality are sent to the cold storage rooms; the others, which do not keep as well, must be sold at once. Thus it may happen that "cold storage" food may often be of better quality than "fresh" food, despite the traditional prejudice against it.

FROM cold-storage handling on a large scale, experts have learned many facts that can be applied to good advantage in a housewife's icebox. Lemon and eggs, as most housewives know, cannot be kept in the same icebox; the eggs come out with a pronounced lemon taste. So marked is this property that cold storage men do not even keep them in the same building. The same characteristic is true of other citrus fruits, though lemons are the worst offenders. Along with oranges and canteloupes, they should be kept as near as possible to the top of the ice box, where the air circulation is best and odors are less likely to be carried downward to the lower shelves. Meat, butter, poultry, milk, and drinking water belong in the coldest part of the box, right next to the ice section. Bananas and butter don't get along well together in the household refrigerator, and fish are a familiar source of trouble—though a fish carefully cleaned and washed is almost odorless. Fish are seldom carried in general cold storage, as they form a separate branch of the business.

One mistake made by inexperienced housekeepers is the placing of a sheet of newspaper around the ice cake to conserve it. True, it keeps the cake from melting—and by the same token it destroys the efficiency of the ice box, which is kept cool solely by the melting of ice. If wrapping must be done, it might be well to insulate the whole icebox against the heat of outside air. Modern mechanical or electrical household refrigerators are already insulated.

## Nine-Day Mail to Chile

IT TAKES a letter nine days, now, to travel from New York to Chile. The new air mail service, just opened, clips ten days or more from steamship time and opens a new era of speedy communication between the United States and South America.

The long-awaited service is an extension of the American air line that already stretched as far south as Mollendo, Peru. Now reaching to Santiago, Chile, it gives impetus to an aerial network that is speedily linking all of South America with an airway system as modern as that of the United States and in many ways more ambitious.

# PATENTS TRADE-MARKS AND COPYRIGHTS



**VICTOR BUILDING**  
Our New Building Nearly Opposite U. S. Patent Office Specially Erected by Us for Our Own Use

## OUR OFFER: FOR THE PROTECTION OF YOUR INVENTION

**YOUR FIRST STEP**—The inventor should write for our blank form "RECORD OF INVENTION." Before disclosing your invention, a sketch and description should be made on our "Record of Invention Blank", signed, witnessed, then returned to us and we will place it in our fireproof secret files. **We will also give our opinion** as to whether the invention comes within the Patent Office definition of a patentable invention. This "Record of Invention" will serve as "proof of conception" until the case can be filed in the Patent Office. **There is no charge or obligation for this service.**



## Write for Our Five Books Mailed Free to Inventors

*Our Illustrated Guide Book*

### HOW TO OBTAIN A PATENT

Contains full instructions regarding U. S. Patents. Our Methods, Terms, and 100 Mechanical Movements illustrated and described.

### OUR TRADE-MARK BOOK

Shows value and necessity of Trade-Mark Protection. Information regarding TRADE-MARKS AND UNFAIR COMPETITION IN TRADE.

### OUR FOREIGN BOOK

We have Direct Agencies in Foreign Countries, and secure Foreign Patents in shortest time and at lowest cost.

### PROGRESS OF INVENTION

Description of World's Most Pressing Problems by Leading Scientists and INVENTORS.

### DELAYS ARE DANGEROUS IN PATENT MATTERS

TO AVOID DELAY: YOU SHOULD HAVE YOUR CASE MADE SPECIAL IN OUR OFFICE to save correspondence, secure protection and early filing date in Patent Office. You should send us a model, sketch or photograph with a description of your invention together with \$25.00 on account. We will make an examination of the U. S. Patent Office records and if it is Patentable we will prepare the official drawings immediately and forward them for approval. If the invention is not patentable we will return the fee less the cost of the examination.

### PAYMENT OF FEES IN INSTALLMENTS

It is not necessary that the total cost of a patent be paid in one payment. We permit our clients to pay for their applications in three installments as the preparation of the application progresses in our office.

ALL COMMUNICATIONS AND DATA STRICTLY CONFIDENTIAL. INTERFERENCE AND INFRINGEMENT SUITS PROSECUTED. Our Large, Comprehensive Organization has been established for 30 years and offers Prompt, Efficient and Personal Service by experienced Patent Lawyers and Draftsmen. We shall be glad to have you consult us or to answer any questions in regard to Patents, Trademarks or Copyrights without charge.

## Highest References—Prompt Service—Reasonable Terms

FREE  
COUPON

**VICTOR J. EVANS & CO.**

Registered Patent Attorneys: Established 1898

MAIN OFFICES: 690 Ninth St., Washington, D. C.

BRANCH OFFICES: 1007 Woolworth Bldg., New York City; 1640-42 Conway Bldg., Chicago, Ill.; 514 Empire Bldg., Pittsburgh, Pa.; 828 Fidelity Phila. Trust Bldg., Philadelphia, Pa.; 1010 Hobart Bldg., San Francisco, Calif.

Gentlemen: Please send me FREE OF CHARGE your books as described above.

Name.....

Address.....





## "I'm going to raise his salary"

"I've had my eye on him for some time and I know he can handle bigger work."

"He studies those I.C.S. textbooks every chance he gets, and I want to tell you it has made him a valuable man for this business."

"I'm going to raise his salary and give him that new job we were talking about. I wish we had more men like him."

How do you stand when your employer checks up his men for promotion? Does he pass you by as just a routine worker, or does he think of you as a man who is ambitious to get ahead? Won't you be far more likely to get the promotion if he knows you are studying at home and are really preparing yourself to handle bigger work?

Think it over. Then act. It takes only a moment to mark and mail the coupon and find what the International Correspondence Schools can do for you, yet that one simple little step may be the means of changing your whole life. "Do it now."

### INTERNATIONAL CORRESPONDENCE SCHOOLS

"The Universal University"  
Box 7642-F, Scranton, Penna.

Without cost or obligation on my part, please send me a copy of your 48-page booklet, "Who Wins and Why," and tell me how I can qualify for the position, or in the subject, before which I have marked an X:

#### TECHNICAL AND INDUSTRIAL COURSES

- |  |  |
|--|--|
| <input type="checkbox"/> Architect               | <input type="checkbox"/> Automobile Work           |
| <input type="checkbox"/> Architectural Draftsman | <input type="checkbox"/> Aviation Engines          |
| <input type="checkbox"/> Building Foreman        | <input type="checkbox"/> Plumber and Steam Fitter  |
| <input type="checkbox"/> Concrete Builder        | <input type="checkbox"/> Plumbing Inspector        |
| <input type="checkbox"/> Contractor and Builder  | <input type="checkbox"/> Foreman Plumber           |
| <input type="checkbox"/> Structural Draftsman    | <input type="checkbox"/> Heating and Ventilation   |
| <input type="checkbox"/> Structural Engineer     | <input type="checkbox"/> Sheet-Metal Worker        |
| <input type="checkbox"/> Electrical Engineer     | <input type="checkbox"/> Steam Engineer            |
| <input type="checkbox"/> Electrical Contractor   | <input type="checkbox"/> Marine Engineer           |
| <input type="checkbox"/> Electric Wiring         | <input type="checkbox"/> Refrigeration Engineer    |
| <input type="checkbox"/> Electric Lighting       | <input type="checkbox"/> R. R. Positions           |
| <input type="checkbox"/> Electric Car Running    | <input type="checkbox"/> Highway Engineer          |
| <input type="checkbox"/> Telegraph Engineer      | <input type="checkbox"/> Chemistry                 |
| <input type="checkbox"/> Telephone Work          | <input type="checkbox"/> Pharmacy                  |
| <input type="checkbox"/> Mechanical Engineer     | <input type="checkbox"/> Coal Mining Engineer      |
| <input type="checkbox"/> Mechanical Draftsman    | <input type="checkbox"/> Navigation                |
| <input type="checkbox"/> Machine Shop Practice   | <input type="checkbox"/> Iron and Steel Worker     |
| <input type="checkbox"/> Toolmaker               | <input type="checkbox"/> Textile Overseer or Supt. |
| <input type="checkbox"/> Patternmaker            | <input type="checkbox"/> Cotton Manufacturing      |
| <input type="checkbox"/> Civil Engineer          | <input type="checkbox"/> Woolen Manufacturing      |
| <input type="checkbox"/> Surveying and Mapping   | <input type="checkbox"/> Agriculture               |
| <input type="checkbox"/> Bridge Engineer         | <input type="checkbox"/> Fruit Growing             |
| <input type="checkbox"/> Gas Engine Operating    | <input type="checkbox"/> Poultry Farming           |
|  | <input type="checkbox"/> Mathematics               |
|  | <input type="checkbox"/> Radio                     |

#### BUSINESS TRAINING COURSES

- |  |  |
|--|--|
| <input type="checkbox"/> Business Management     | <input type="checkbox"/> Business Correspondence |
| <input type="checkbox"/> Industrial Management   | <input type="checkbox"/> Show Card and Sign      |
| <input type="checkbox"/> Personnel Management    | <input type="checkbox"/> Lettering               |
| <input type="checkbox"/> Traffic Management      | <input type="checkbox"/> Stenography and Typing  |
| <input type="checkbox"/> Accounting and C. P. A. | <input type="checkbox"/> English                 |
| <input type="checkbox"/> Coaching                | <input type="checkbox"/> Civil Service           |
| <input type="checkbox"/> Cost Accounting         | <input type="checkbox"/> Railway Mail Clerk      |
| <input type="checkbox"/> Bookkeeping             | <input type="checkbox"/> Mail Carrier            |
| <input type="checkbox"/> Secretarial Work        | <input type="checkbox"/> Grade School Subjects   |
| <input type="checkbox"/> Spanish                 | <input type="checkbox"/> High School Subjects    |
| <input type="checkbox"/> French                  | <input type="checkbox"/> Illustrating            |
| <input type="checkbox"/> Salesmanship            | <input type="checkbox"/> Cartooning              |
| <input type="checkbox"/> Advertising             | <input type="checkbox"/> Lumber Dealer           |

Name.....  
Street.....  
Address.....  
City..... State.....

Occupation.....  
If you reside in Canada, send this coupon to the  
International Correspondence Schools Canadian, Limited,  
Montreal, Canada

## Play the Hawaiian Guitar like the Hawaiians!

Only 4 Motions used in playing this fascinating instrument. Our native Hawaiian instructors teach you to master them quickly. Pictures show how. Everything explained clearly.

#### Play in Half Hour

After you get the four easy motions you play harmonious chords with very little practice. No previous musical knowledge needed.

#### Easy Lessons

Even if you don't know one note from another, the 52 printed lessons and clear pictures make it easy to learn quickly. Pay as you play.

**GIVEN**—a sweet toned HAWAIIAN GUITAR, Carrying Case and Playing Outfit Value \$18 to \$20 No extras—everything included

WRITE AT ONCE for attractive offer and easy terms. A postcard will do. ACT!

OTHER COURSES: Tenor Banjo, Violin, Tiple, Tenor Guitar, Ukulele, Banjo Ukulele, Under well-known instructors.  
FIRST HAWAIIAN CONSERVATORY OF MUSIC, Inc.  
9th Floor, Woolworth Bldg., Dept. 246 New York, N. Y.

Approved as a Correspondence School Under the Laws of the State of New York—Member National Home Study Council.

## First Scientific Census

(Continued from page 51)

tinguishable from thousands of others like it by tell-tale holes made by punching machines. These holes represent a mechanical translation of the information written on the census card. Thus they identify John Smith, tell his occupation, age, and so on.

About 1,000 girls transfer the information from the forms to the cards by means of hand-operated punching devices. But when cards are being prepared for a certain locality, New York State, for example, the robots are brought into play. Part of the punching is done by the automatic gang puncher, which can be adjusted to handle cards in any desired grouping, such as occupation, nationality, or age.

From the punching machines, the cards go to other devices which sort them according to the information desired. This operation requires from fourteen to sixteen runs for each set of cards. For instance, the nationality of the citizens of the State of New York is to be determined. The New York State cards are run through the assorting machines. Fast moving rollers carry the cards over the robot's swift mechanical fingers. As these fingers reach the holes designating nationality, the cards drop into various containers—the German-born in one, the British-born in another, and so on.

**OR** SUPPOSE that the Bureau wants to find out how many people in New York State are white. The cards are rerun through the assorters, and the machines separate the various races according to the punched holes.

To sort the cards according to occupations or professions, the cards again are rerun and re-assorted. As many as twelve different groupings can be made by one of the new machines.

The assorters, however, do no counting. That part of the job is left for the automatic tabulators, which are operated electrically. Tiny wire brushes form electrical contacts through the holes in the cards and electrically record the totals to be ascertained.

For example, if the persons in various occupations are to be counted, the cards are taken from the assorters and placed in the tabulators. Each of these is able to count as many as ten different occupations at one time. As the cards pass through, the wire brushes, adjusted for that particular count, reach for them. Electrical contacts are made at the holes, and the recording device, similar to that of an adding machine, registers the number. At the end of the run a button is pushed and the total is printed on a slip of paper—not only the total of persons in one occupation, but the totals for all of the occupations at the same time.

**PRIMARILY** the census was started to learn the population of the country. In 1790 federal marshals were assigned the task. They were allowed thirteen months for the enumeration and returned a total population of 3,929,214. Since then, the nations of the world have been developing methods for speedy enumeration of their people.

Some countries, however, have been backward. Only two years ago, Turkey decided to take its first census. Modern methods were discarded. The Turks imprisoned the entire population in their houses on the day of the census; no one was permitted on the streets except armed guards and census takers; business and industry came to a halt; no trains or street cars were run. In Constantinople it was not until the count was complete at 10:15 P.M. that the people were released from their homes by the signal guns.

Fortunately such a drastic method is not necessary in the United States. The population of this country has been increasing at the rate of about 1,400,000 persons a year, or one person every twenty-six seconds. The major part of the increase is made up of the excess of births over deaths, which amounts to 1,150,000 annually. The

(Continued on page 161)



## Get Strong WITH These Improved Muscle Builders All for \$5.00



Why pay an extravagant price for strength—get all equipment you require and excellent course of instructions for only \$5.00. Develop muscles of a super-man. Get strong and amaze friends. We show how to easily master feats which now seem difficult—if you want physical culture for your health's sake, this equipment is just what you need. Save at least \$20.00. We furnish a ten cable chest expander adjustable to resistance up to 200 lbs. Made of new live extra strength, springy rubber to assure long wear and give resistance you need for real muscle development. You also get a pair of patented hand grips for developing powerful grip and forearm.

We include wall exercising parts which permit you to develop your back, arms and legs—a real muscle necessity. Business men and athletes, too, first age in their legs. Develop leg muscles with foot strap which we furnish. This will give you speed and endurance—but that isn't all you get. In addition, we include a specially written course which contains pictures and diagrams showing how to develop any part of your body so you quickly get on with these exercises and gain greatest advantage from their use. Act now!

#### SEND NO MONEY

All items pictured are included in this special offer. Sign name and address to coupon and rush to us. We send your ten cable chest expander, wall parts, a pair of hand grips, foot strap and the course by return mail. Pay postman \$5.00, plus postage on arrival. (If you send check or money order in advance, we pay postage.)

#### GUARANTEE

All Crusader products are guaranteed to give entire satisfaction or money back.

Crusader Apparatus Co.,  
Dept. 610, 44 Parker Ave., Maplewood, N. J.

I accept your offer. Send me everything described in your advertisement by return mail. I will pay the postman \$5.00 plus postage on arrival. It is understood if I am not entirely satisfied after examination I can return the goods and you will refund my money.

Name.....  
Street.....  
City..... State.....

## Learn Photography at HOME

Make money taking pictures. Prepare quickly during spare time. Also earn while you learn. No experience necessary. New easy method. Nothing else like it. Send at once for free book, *Opportunities in Modern Photography*, and full particulars.

AMERICAN SCHOOL OF PHOTOGRAPHY  
Dept. 1367, 3601 Michigan Ave., Chicago, U. S. A.

#### BECOME AN EXPERT

## ACCOUNTANT

Executive Accountants and C. P. A.'s earn \$5,000 to \$10,000 a year. Thousands of firms need them. Only 3,000 Certified Public Accountants in the United States. We train you thoroughly at home in spare time for C. P. A. examinations or executive accounting positions. Previous experience unnecessary. Training under the personal supervision of William B. Castenholz, A. M., C. P. A., and a large staff of C. P. A.'s, including members of the American Institute of Accountants. Write for free book, "Accountancy, the Profession that Pays."

LaSalle Extension University, Dept. 1083-H, Chicago  
The World's Largest Business Training Institution

## DRAW CARTONS

Turn Your Talent Into Money  
Cartoonists earn from \$50 to \$250.00 per week—some even more. Remarkable new Circle System of Drawing teaches you in half the usual time. Send for booklet and sample lesson plate explaining full details of the Course. No salesman will call.

THE NATIONAL SCHOOL OF CARTOONING  
915 Penton Building Cleveland, Ohio





## First Scientific Census

(Continued from page 160)

other part results from the increase in immigration over emigration, which adds 240,000 persons every year.

The most conservative estimates place the 1930 population at twice what it was in 1890, only forty years ago, and thirty times as great as it was at the time of the first census.

History records no other instance of a population increasing so rapidly. Moreover, there has been no other nation in which the increase in population has been accompanied by such improvement in the wellbeing of the people.

In commenting on this state of affairs, William M. Steuart, director of the Bureau of the Census, said:

"As a statistician, I believe that this advancement has been due in no small degree to the definite knowledge we have of our production, our resources, our facilities for transportation, and our population as expressed in the census statistics."

IN 1790, the 4,000,000 persons who lived in the United States occupied a territory of 868,000 square miles, or 4.5 persons for every mile. The present continental area is 2,974,000 square miles, and it is estimated the average population per square mile in 1930 will be more than forty, nearly a thousand percent increase.

In 1790, only six cities in the United States had as many as 8,000 inhabitants. The population of these cities formed a little more than three percent of the total population of the country. In 1920, there were 924 such cities and their population was forty-four percent of the total. Including the population of smaller cities down to those with 2,500 inhabitants, the urban population of the United States in 1920 formed slightly more than one half of the total, and the rural less than one half, while the strictly farm population was less than thirty percent.

It appears, therefore, that this is becoming more and more a nation of cities. But there are certain strong factors operating against this tendency. One of the most potent is the automobile, which carries the city worker to a home in the suburbs.

WHEN the United States started the first census, only the names of heads of families and the number of persons in each family were recorded. For example, aged and yellowing books at the Census Bureau show the family of John Hancock as comprising two white males over sixteen years of age, three white females, and seven other free persons not white, who were presumably negro servants.

Starting with the census of 1850, the name of each individual in the family was recorded. The books for 1860 show the family of Abraham Lincoln enumerated at Springfield, Ill., as consisting of Lincoln; his wife, Mary; his three sons, Robert T., Willie W., and Thomas; a servant; and a boy of fourteen named Philip Dinkell. Each individual was asked to give the value of his real and personal property. Lincoln returned \$12,000 for his personal property and \$5,000 for his real estate.

When the system of individual enumeration was adopted in 1850, a number of new classifications were added, including illiteracy, school attendance, occupation, age, and place of birth. In 1870 the question of nativity of parents was added.

In later censuses, the foreign born have been classified according to country of birth, year of immigration to the United States, whether naturalized or alien, and their ability to speak the English language.

The present questions of census takers cover an even wider field, including marital conditions, religion, occupation, and the like. They will give a microscopic view revealing priceless information which eventually will benefit most of the citizens of the United States.

# PATENTS

TRADE-MARKS • DESIGNS  
FOREIGN PATENTS

MUNN & CO.  
PATENT ATTORNEYS

*Associated since 1846 with the Scientific American*

SCIENTIFIC AMERICAN BUILDING 1551 SCIENTIFIC AMERICAN BUILDING  
625 F. Street, Washington, D.C. 24 W. 40th St., New York City

1303 TOWER BUILDING  
Corner of Michigan Blvd.  
and Madison St.  
Chicago, Ill.

511 VAN NUYS BUILDING  
Spring & Seventh Sts.  
Los Angeles, Cal.

HOBART BUILDING  
582 Market St.  
San Francisco, Cal.



Books and Information on Patents and Trade-Marks  
by Request

Associates in all Foreign Countries



Station WISN  
operates  
from S. of E.  
Also amateur  
Station W980.

OSCAR WERWATH  
Electrical Engineer  
Pioneer in Electrical  
Training for 25 years.

NOW I will train  
YOU for BIG PAY in

# ELECTRICITY

RIGHT IN YOUR OWN HOME!

Just As I Have Trained Over 25,000  
Graduates in My Great  
ELECTRICAL SCHOOL!

### BIG HOME LABORATORY Without Extra Cost



Full-sized  
laboratory  
equipment  
(Not toys)  
that you  
can't dupli-  
cate for  
\$60.

### SPECIAL PATENTED Laboratory Equipment

that cannot  
be secured  
elsewhere.  
Makes fas-  
cinating  
sport of lab-  
oratory ex-  
periments.  
Amazingly easy to use.



### LEARN BY DOING



Work on ac-  
tual motor,  
switchboard,  
circuits, and  
full-sized  
electrical  
equipment.  
Get Train-  
ing that is PRACTICAL.

NOW, through my Extension Division, I will train you for advancement and MORE PAY in Electricity without your leaving your home! You will get the same course, the same methods, the same faculty of skilled engineers that have made The School of Engineering internationally famous. Behind your training will be an institution specializing in Electricity—a fully established college, recognized by the U. S. Gov't. Thousands of S. of E. graduates now employed in important positions with largest concerns in the country.

**ELECTRICALLY TRAINED MEN**  
**Earn \$3,000 to \$10,000 a Year**

In Radio, Television, Aviation, Automotives, Refrigeration, Moving Pictures, Super-Power, Lighting—Electricity is the key. Big manufacturers are pleading for men trained in Practical Electricity. Salaries of \$3,000 to \$10,000 a year now are common. Here is a vast field for you, with unlimited opportunities. Now is the time. Start on the road of Electrical Training that leads to bigger pay—bigger opportunities—and SUCCESS!

### EARN AS YOU LEARN

Cash in on your Electrical Training while you're learning. Many students report increased earnings, advancement, even while studying. Train in your spare time at home. Employment Service renders FREE aid for life. Lifetime Consultation Service. Many exclusive features available nowhere else. Mail the coupon today for full particulars.

**FREE!**

Send Coupon TODAY for  
illustrated Catalog—  
"Practical Electricity—  
the Key to Success"—  
and full details of Ex-  
tension Division Training.

### MAIL COUPON NOW!

Extension Division, Dept. 71  
SCHOOL OF ENGINEERING  
Milwaukee, Wisconsin

Please send me without obligation FREE  
illustrated catalog, "Practical Electricity  
—the Key to Success," and details of Ex-  
tension Division training.

Name .....  
Address .....

EXTENSION DIVISION  
**SCHOOL OF ENGINEERING**

Dept. 71 Milwaukee, Wis.





## "At last—I can Fly!"

THE big moment has arrived! Our hero has spent three minutes a day studying "Pleasant Paragraphs for Prospective Pilots"—and now Prof. Postman is handing him his diploma. Ah, the thrill of it—the heavenly bliss of this graduation day! But it won't be long now. Instead of a "post" graduate there's apt to be a post mortem if he ever gets his hands on the controls. . . .

This quaint little scene, frankly, is just about what some folks think of a correspondence course in Flying. And I don't blame them.

## I am NOT Teaching "Flying-by-Mail"

Nowhere in my advertising or literature, do I claim to turn out fliers. My home-study Course gives Aviation's *ground-work* to sincere men who cannot leave job or home to get class-room instruction. The Industry needs men who *know*. Time, equipment and the rendering of service are too valuable for guesswork or amateur tinkering.

My textbooks cover the theory of flight, plane construction, rigging, repairs, motors of all types, instruments, commercial management—essential knowledge that every man in Aviation, whether on the ground or in the air, must have to handle his job intelligently.

## A Free Book for YOU

"Wings of Opportunity" is a book which tells about the opportunities that exist in Aviation and how I am helping ambitious, air-minded men to make the most of them. If you are eighteen years of age or older, it will give me pleasure to send you a copy.

## Aviation Institute of U. S. A.

WALTER HINTON, Pres.  
1115 Connecticut Ave. Washington, D. C.

## Mail Now for Facts

Walter Hinton, Pres., 2-Z  
Aviation Institute of U. S. A.  
1115 Connecticut Avenue, Washington, D. C.  
Send me a FREE copy of your book "Wings of Opportunity."  
Name.....  
Street..... Age.....  
City..... State.....  
(Must be 18)

## The Zeppelin Grows Up

(Continued from page 28)

of Zeppelin's commercial ships for military service. Several military Zeppelins were already in use by the German army and navy, and more were ordered. Not everyone knows that during the four years of fighting, the four great Zeppelin plants then in operation built eighty-eight of the air leviathans. More than 1,000 men labored at one factory, at Staaken, Germany, to turn out the giant night bombers that raided London and Paris in 1917 and 1918. But casualties were heavy among them, and some of the lessons learned in the war played an important part in the improvement of modern airships.

ONE day four German Zeppelins, returning from a military mission, were caught in a storm at 18,000 feet altitude and swept over Allied lines, where all were shot or forced down. The engines, designed for sea-level conditions, had failed in the rare air of high altitudes. Out of this experience came the present high-altitude airship motor, over-dimensioned and with surplus compression, which develops maximum power at about 10,000 feet.

One of Count Zeppelin's inventions during the war was the Zeppelin observation car—a sort of upside-down periscope. While the airship lay hidden from the enemy above a bank of clouds, an observer in a tiny inclosed car would be lowered to the end of a cable five-eighths of a mile long. Just below the clouds, he could direct the operation of the ship and even signal for bomb releases by telephone—praying meanwhile, no doubt, that the bomb would not hit him.

While the Zeppelin plants were turning out military airships, the inventor found time to experiment with a new type of duralumin dirigible designed especially for aerial photography. He was successful, and construction of a number of these machines was interrupted only by the Armistice.

In the four years of the war the speed of Zeppelins had increased from forty-seven to eighty-eight miles an hour. To carry useful loads of forty-four tons, their hydrogen capacity had been raised from 706,000 to more than 2,000,000 cubic feet. Commercial ships were built after the war embodying these improvements. The Zeppelin was growing up.

COUNT ZEPPELIN died in May, 1917, at seventy-eight, still dreaming of peace-time Zeppelins for world-wide transportation. Had he lived a little longer he would have seen a definite sign of the airship's future role in long-distance travel. British troops were besieging German colonials in German East Africa. The Zeppelin L-59 was sent to carry ammunition and medicine to the beleaguered defenders. Picking up nine tons of machine gun ammunition at Jambol, in southern Bulgaria, it set sail for Africa.

Just as the ship was crossing the Sahara desert, the German Intelligence Office intercepted a British radiogram that the Germans had surrendered. The L-59 had just passed through a storm and had taken in her wireless antenna. It was not until she was west of Khartum that she listened in and picked up Headquarters' frantic message not to land. The L-59 turned without stopping and, flying high over Asia Minor and the Black Sea, reached Jambol after having traveled, in four days, 4,225 miles non-stop. It was a world's record for any kind of aircraft, and at that the L-59 had enough fuel left in her tanks for two or three days more in the air.

Two years later, the British airship R-34—said to have been patterned after a German Zeppelin captured in the war—fulfilled Count Zeppelin's vision of trans-ocean airships by making the first round trip across the Atlantic.

In 1924 the *Los Angeles*, America's share of German reparations, (Continued on page 163)



\$1700 to \$3400 Year

## U. S. Government Jobs

MEN—BOYS, 18 Up

Steady Work  
Paid Vacations  
Common Education  
Usually Sufficient

Franklin Institute  
Dep. A277, Rochester N.Y.

Gentlemen: Rush me without charge 32-page book with list of U. S. Government big paid positions obtainable. Advise me regarding the salaries, hours, duties, vacation and tell me how to get a job.

Mail Coupon today—SURE

Name.....

Address.....

## ACCOUNTING LESSON FREE

Don't wonder about Accounting Courses

Find out about this one by trying it free

Send for our 84-page book "How to Learn Accounting" and the first lesson free of charge.

INTERNATIONAL ACCOUNTANTS SOCIETY, INC.

A Division of the

ALEXANDER HAMILTON INSTITUTE  
Dept. 57 3411 So. Michigan Ave., Chicago

## COLLEGE COURSES

at Home

Carry on your education. Develop power to initiate and achieve. Earn credit toward a Bachelor degree or Teaching Certificate by correspondence. Select from 450 courses in 45 subjects, including English, Mathematics, History, Education, Psychology, Economics, the Languages, etc. Write for catalog.

The University of Chicago  
451 ELLIS HALL CHICAGO, ILL.

## Learn Cartooning

At Home—in Your Spare Time

The famous Picture Chart Method of teaching original drawing has opened the door of success for hundreds of beginners. Whether you think you have talent or not, send for sample chart to test your ability, and examples of the work of students earning from \$50 to \$300 per week. Please state your age.

THE LANDON SCHOOL  
1451 National Bldg., Cleveland, O.



## HB PAINT SPRAY

"DOES THE WORK OF FIVE MEN"

EASY TERMS  
JOHN'S TRIAL  
QUICKLY PAYS FOR ITSELF

QUICK, EASY PROFITS!

Practically no investment. Small space required. Steady demand and BIG PROFITS refinishing autos, furniture—painting houses and barns with HB quick spray method. One man does the work of five with brushes. Pays for itself on easy monthly payments. 30 DAYS' TRIAL. Write today for details. HOBART BROS. CO., Box 1091, Troy, Ohio

## AGENTS 500% PROFIT GENUINE GOLD LEAF LETTERS

Guaranteed to never tarnish. Anyone can put them on stores and office windows. Enormous demand, large profits. Paul Clark says: smallest day \$28.70. R. L. Reel made \$920 in two months. Write today for free sample and liberal offer to general agents.

METALLIC LETTER CO., 433A N. Clark Street, Chicago.

## PAINT SIGNS and SHOW CARDS

We quickly teach you by mail, or at school, in spare time. Enormous demand. Big future. Interesting work. Oldest and foremost school. EARN \$50 TO \$200 WEEKLY Otto Wiegand, Md., home-study graduate, made \$12,000 from his business in one year. John Vesper, N. Y., gets \$25 for a show card. Crawford, B. C., writes: "Earned \$200 while taking course." Write for complete information.

DETROIT SCHOOL OF LETTERING  
159 Stinson Ave. Est. 1899 DETROIT, MICH.





## The Zeppelin Grows Up

(Continued from page 162)

crossed the Atlantic from Friedrichshafen and landed at Lakehurst, N. J., with enough fuel in her tanks to proceed to Chicago. This ship marked the permanent departure in hull shape from the older "lead pencil" design, pointed at both ends, to a shape more like that of an egg. The result was greater strength.

The *Los Angeles*, then, was the last of the Zeppelins. Its 125 predecessors all had been destroyed—some by fire, some by storm, some by hostile incendiary bullets. Yet out of this heap of broken hopes was to rise the newest and in many ways the best of them all.

The *Graf Zeppelin*, named appropriately for Count Zeppelin, was the embodiment of every lesson learned in building its predecessors. When it reached Lakehurst from Friedrichshafen, Germany, this year, it had fuel enough left for at least thirty hours more of flying. It had flown 5,000 miles in ninety-three hours, carrying sixty-one persons and tons of mail and express. One of its outstanding features was the method of maintaining a constant weight. Its "blau gas" fuel, used instead of gasoline, weighed about the same as air and hence did not lighten the ship when it burned. By way of contrast, the *Los Angeles* weighed twenty-two tons less when it arrived here than at the start, requiring the valving off of valuable lifting gas to keep it down to normal level.

WHAT is the Zeppelin's future? A hint is to be found in the great new rigid airships under construction here and abroad. The British *R-100* and *R-101*, are intended primarily for fast mail and passenger service to such distant lands as Argentina, Australia, Canada, Egypt, Norway, India and Spain, where mooring masts and hangars are being built for them. They use hydrogen lifting gas, of which each carries 5,000,000 cubic feet.

The two giant dirigibles for the United States Navy will incorporate perhaps more radical improvements than any of their predecessors. Each will have three backbones, triangular keels running from one end to the other, in the upper half of the envelope. They will be so strong, with bracing rings spaced along the ship's length, that they will require no wires for further rigidity—a construction that permits all parts of the ship to be inspected during flight. Inside the keels will be long corridors, promenade decks, and sleeping quarters.

EIGHT 600-horsepower Maybach motors will each have its own compartment inside the hull, avoiding wind-resistance. The only parts of the ship projecting outside the hull will be control surfaces, propellers, and their supports.

Power will be delivered through solid shafts to propellers mounted on outriggers. The propellers, of novel design, can be rotated from horizontal to vertical. Thus they can lower and raise the craft without waste of gas.

Space for five or more airplanes within the hull is another novel feature of the two new Navy ships. The planes may be launched from the mother dirigible and return to it while it is in flight. Each of the ships, though slightly larger than the new British dirigibles, will have about the same lifting power. The helium gas to be used in the American ships has a lifting power slightly below that of hydrogen. Its greater safety is expected to compensate for the difference.

Little does the \$2,000,000 hangar at Akron where America's newest airships are taking shape resemble the shed on Lake Constance where Count Zeppelin constructed his first airship. The modern dock is 1,175 feet long and its unobstructed floor space covers eight and a half acres. A ship of 10,000,000 cubic feet could be built in it. Perhaps some day it will be. For the Zeppelin has indeed grown up.

# Win \$1000 CASH

### This Offer Is Open to Every Reader of This Announcement

It makes no difference who you are or where you live we want you to send us a name for our toothpaste. Whoever sends the most suitable name will win—nothing more is necessary to gain this cash prize of \$1000.00.

### Nothing to Buy—Nothing to Sell

You can use a coined word or a word made by combining two or more words, such as "Snow-White," "Gum-Strength," etc., or any other name you might think would fit the high quality of this dental cream. There is nothing to buy or sell—simply the person sending the best and neatest suggestion for a name will receive \$1000 cash prize, or, if prompt, \$1100 in all.

### ANY NAME MAY WIN

No matter how simple you think your suggestion is you cannot afford to neglect sending it at once. Any name may win.

**NAME THIS**

Win this \$1000 cash prize by a few moments' thought. How can you earn this amount of money easier or more quickly? Remember, there is no obligation! The person submitting the winning name will have nothing else to do to win the \$1000 and the extra \$100, if prompt. In choosing a name bear in mind this dental cream is marvelous for teeth and gums. It is designed to sweeten the breath, beautify the teeth, cleanse cavities and promote teeth and gum health. The only thing necessary to win is to send the name we choose as the neatest and best suited for this dental cream. Only one name will be accepted from each contestant. This unusual offer is only one of a number of offers embraced in our novel distribution plan, whereby those taking part may win any one of twenty-odd prizes, the highest of which is \$3500 cash. By participating in our distribution plan the winner of the \$1100 cash prize may win an additional \$3500, making a total of \$4600. Everyone sending a name regardless of whether it wins or not, will be given the same opportunity to win the \$3500 or one of the other cash prizes. Get busy with your suggestion at once—do not delay! Neglect may cost you thousands of dollars.

**\$100 Extra for Promptness**

To get quick action I am going to pay the winner an extra \$100 for promptness, or \$1,100 in all—so send your suggestion AT ONCE!

### CONTEST RULES

This contest is open to everyone except members of this firm, its employees and relatives.

Each contestant may send only one name. Sending two or more names will cause all names submitted by that person to be thrown out.

Contest closes November 30, 1929. Duplicate prizes will be given in case of ties.

To win the promptness prize of \$100 extra, the winning name suggested must be mailed within three days after our announcement is read.

**MR. H. E. RAY, Contest Manager.**

718 McCune Bldg., Des Moines, Iowa.

Enclosed with this coupon on separate sheet is my suggestion for a name.

Date this announcement was read.....

Date my suggestion is mailed.....

Name.....

Address.....

NOTE: Being prompt qualifies you for the extra \$100.00 as outlined in this announcement.

## HELP WANTED

We require an ambitious person to do special advertising work right in your own locality. Pay is exceptionally large. Work is pleasant and dignified. No previous experience necessary. You simply carry out our instructions. Your full time brings you a handsome income—spare time pays you well. If you are making less than \$150 a month write at once for full particulars. Costs you nothing to investigate. I will give you all the facts so you can decide for yourself.

ALBERT MILLS, Gen. Manager Employment Dept.  
2391 Monmouth Ave., Cincinnati, Ohio.

## AVIATION Information FREE

Send us your name and address for full information regarding the Aviation and Airplane business. Find out about the many great opportunities now open and how we prepare you at home, during spare time, to qualify. Our new book *Opportunities in the Airplane Industry* also sent free if you answer at once.

AMERICAN SCHOOL OF AVIATION  
Dept. 1367 3601 Michigan Ave. CHICAGO

## INVENTORS PROTECT YOUR IDEAS

Write for our Guide Book, "HOW TO GET YOUR PATENT," and Evidence of Invention Blank, sent Free. Tells our terms, methods, etc. Send model or sketch and description of your invention for INSPECTION and INSTRUCTIONS FREE.

Terms Reasonable.

Best References.

WRITE TODAY

**RANDOLPH & COMPANY, Patent Attorneys**

Dept. 130 Washington, D. C.

Name.....

Address.....





## HIGH SCHOOL COURSE IN TWO YEARS

### YOU ARE BADLY HANDICAPPED if you lack High School training.

You cannot attain business or social prominence. You are barred from a successful business career, from the leading professions, from well-paid civil service jobs, from teaching and college entrance. In fact, employers of practically all worth-while positions demand High School training. You can't hope to succeed in the face of this handicap. But you can remove it. Let the American School help you.

### FIT YOURSELF FOR A BIG FUTURE

This course, which has been prepared by some of America's leading professors, will broaden your mind, and make you keen, alert and capable. It is complete, simplified and up-to-date. It covers all subjects given in a resident school and meets all requirements of a High School training. From the first lesson to the last you are carefully examined and coached.

### USE SPARE TIME ONLY

Most people *idle* away fifty hours a week. Probably you do. Use only one-fifth of your wasted hours for study and you can remove your present handicap within two years. You will enjoy the lessons and the knowledge you will gain will well repay the time spent in study.

Check and mail the coupon NOW for full particulars and Free Bulletin.

### American School

Dept. H-748

Drexel Ave. and 58th St., Chicago

### American School

Dept. H-748 Drexel Ave. & 58th St., Chicago

Send me full information on the subject checked and how you will help me win success.

- |                              |                            |
|------------------------------|----------------------------|
| .....Architect               | .....Business Law          |
| .....Building Contractor     | .....Lawyer                |
| .....Automobile Engineer     | .....Machine Shop Practice |
| .....Automobile Repairman    | .....Mechanical Engineer   |
| .....Civil Engineer          | .....Shop Superintendent   |
| .....Structural Engineer     | .....Employment Manager    |
| .....Business Manager        | .....Steam Engineer        |
| .....Cert. Public Accountant | .....Foremanship           |
| .....Accountant and Auditor  | .....Sanitary Engineer     |
| .....Bookkeeper              | .....Surveyor (& Mapping)  |
| .....Draftsman and Designer  | .....Telephone Engineer    |
| .....Electrical Engineer     | .....High School Graduate  |
| .....Electric Light & Power  | .....Wireless Radio        |
| .....General Education       | .....Undecided             |
| .....Vocational Guidance     |                            |

Name.....

Address.....

## Everyday Wonders in Colloid Chemistry

(Continued from page 44)

average colloidal particle, and take a dive into a cupful of jelly set out to cool and harden, he would see remarkable sights. Throughout the bright red ocean in which he would find himself swimming, there would be drifting slowly a number of balloon-like masses of thicker fluid, like giant jelly fish. No sooner would he get used to these companions than he would notice an alarming fact. The great floating globes are swelling. Inexorably they enlarge and come closer together. Finally they touch, like toy balloons piled on top of each other in a bin. The imaginary swimmer would find himself pressed into one of the small, many-cornered spaces between the swelling globes. That is precisely what happens, though of course on an ultramicroscopic scale, when a cup of jelly turns hard.

In the beginning the warm, liquid solution is a colloidal one. Its particles are tiny globules of the jelly substance mixed with the elements of water. As such a jelly mixture is warmed the globules shrink. What happens, in fact, is that they sweat out some of their contained water into the surrounding solution. If the mixture grows colder instead of warmer the globules swell by absorbing water. The instant that they swell enough to touch one another the jelly stiffens. When they are swollen enough to press tightly against each other the jelly is fully hard.

THIS happens in any kind of jelly, gelatin, agar-agar seaweed, or anything else. There is a material called pectin—plentiful in apples, in the inner rind of grapefruit, and in some other natural materials—which is especially good at forming these stiffening internal structures. That is why housewives often mix apple juice with other fruit juices to make stiff jellies. The pectin in the apple juice does the stiffening, the other juices supply the flavor.

Glue acts in much the same way; most kinds of glue, indeed, are merely varieties of gelatin. To make any two surfaces stick together, it is not really necessary to do more than to make both of them absolutely flat or to fill up the tiny open spaces between them. Two absolutely flat metal plates will stick together tightly all by themselves. Surfaces of ordinary materials do not do this because they are never flat.

The surface of this very page of paper, for example, may be seen under a microscope to be a rough mass of twisted fibers, like fallen tree trunks after a microscopic forest fire. If one sheet of paper is pressed against another, nothing happens, because the surfaces do not really touch. The only contacts are between a few of the higher-lying fibers, as though two landscapes were laid together, touching only by their mountain tops.

THE duty of glue is to fill up these irregularities between the surfaces so that real contact is obtained. Then the natural tendency of most substances to adhere to each other comes into play. One surface sticks to the layer of glue, the glue sticks to the other surface. Intervening roughnesses are filled up by the stratum of colloidal glue, the tiny globules of which deform themselves if necessary to fit into whatever spaces exist. This is why stamps stick to envelopes, why envelopes stay sealed, and why all of the other myriad uses of pastes and glues are possibilities.

Ordinary starch paste is another colloid and acts in the same way to stiffen a shirt front or a collar. It fills up spaces between the fibers of the fabric and sticks these fibers together, so that the whole is stiffened, just as the metal fastenings of a bridge or a skyscraper make the whole structure stiff.

Colloids differ among themselves in their abilities to stick to

(Continued on page 166)

## How to Make Real Money Just Doing This



New Shaving Invention Offers Excellent Money to Men Who Will Act As Our Local Representatives in Their Home Territories. \$30-\$40-\$50 a Day. Full or Spare Time! No Investment Required. Write for Details On

### GENEROUS OFFER

Probably you have heard of KRIS-KROSS—the amazing stropper and razor blade-renewer pictured above. It makes any kind of blade keener than new and prolongs its life for weeks and even months! But that's not all. KRIS-KROSS is one of the most surprising money-makers ever seen. Hundreds of demonstrators and agents all over the country are making from \$200 to \$500 a month just taking orders for it in their home towns. KRIS-KROSS is heavily advertised in magazines but never sold in stores, so we must have people to take orders in each locality. We pay generously for your time and give special bonuses that run your earnings up into real money. Even spare-time workers earn \$15 or more in a single evening or Saturday afternoon.

### AN ASTONISHING INVENTION

KRIS-KROSS' mechanical ingenuity is little short of marvelous. It stropps your blade (any make) on the diagonal just like master barber. Eight "lucky" leather grooves do the trick in eleven seconds. Automatic reverse. Stropps heavy at the start—light at the finish and leaves your blade with the keenest cutting edge steel can take! No wonder it sells like wildfire!

### Profits Waiting for You

So great is the present demand for KRIS-KROSS that agents are reaping profits almost beyond belief. During the month K. P. Rapf made \$602, R. C. Walker (Idaho) made \$9 his very first demonstration, H. King of Massachusetts made \$66 in one day—and J. C. Kellogg cleared \$200 in 7 days at spare time alone!

### Get Details—Special Offer

Right now we are willing to make an extremely generous offer to new agents and demonstrators. Find out about this money-making business without delay. See how simple it is to make \$100 to \$225 a week with KRIS-KROSS. Others are doing it—why not you? Send the coupon now!

### KRIS-KROSS CORP.

Dept. P-244 1418 Pendleton Ave., St. Louis, Mo.

Canadian Address:

CANADIAN KRIS-KROSS CO.  
39 Wellington Street East, Toronto 2, Canada

KRIS-KROSS CORP., Dept. P-244  
1418 Pendleton Ave., St. Louis, Mo.

Please send me full details of your nationally advertised KRIS-KROSS stropper, which is never sold through stores—and tell me about your unusual offer of big profits to demonstrators and order-takers.

Name.....

Address.....

City..... State.....



FACTORY TO YOU—SAVE 50%—COMPARE WITH COSTLIEST OUTFITS BEFORE YOU BUY

**- a powerful new Miraco** <sup>set or complete outfit</sup> **30 DAYS FREE**  
**Electric or Battery**



**NEW LOW  
FACTORY PRICES  
SAVE 50%**

Beautiful Variety of Latest Fine  
Consoles, AC or Battery Sets



**30 DAYS  
FREE TRIAL**

Richly designed, latest type, Lo-Boy Mastercrest console; beautiful two-tone finish in walnut. A gem that costs little. Hinged top lid.

An exquisitely new and fine, genuine walnut desk-type Mastercrest console. Very pretty and a rare bargain. Hinged top.




Spanish Treasure chest design, Mastercrest console. Finest selected grain, solid walnut. Antique wrought hardware. Marvelous value. Hinged top.

These Consoles are Equipped with  
**SUPER DYNAMIC  
CATHEDRAL TONE REPRODUCERS**



Table compact style Mastercrest cabinet in handsome walnut and gold-striped finish. Separate Cathedral Tone Super-Dynamic Speaker to match. Wonderful bargain!

**Get Our Send  
No Money 10th  
Anniversary  
Offer!**

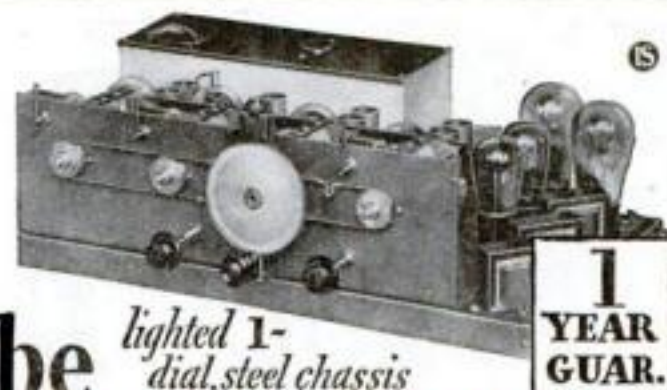

**9 tube** <sup>lighted 1-dial, steel chassis</sup>  
**perfected SCREEN GRID—**  
**latest PUSH-PULL Amplification**

**New SCREEN AERIAL  
Console SUPER-  
DYNAMIC  
Cathedral Tone!**

Mastercrest-built with beautiful genuine walnut; sparkling maple panels; 4-way matched sliding doors. Lifting top. Concealed SCREEN aerial makes outdoor aerial unnecessary. Super-Dynamic Cathedral Tone Reproducer.

Built like—looks like—performs like newest sets in many outfits up to \$300! Latest, finest, costliest construction! Uses "224" SCREEN GRID, "245" PUSH-PULL POWER, "227" HUM-FREE POWER DETECTOR AND "280" RECTIFIER AC TUBES. Phonograph pick-up connection. Local-Distance switch. Built-in power section on steel shielded chassis. Lighted one-dial tuning. Razor-edge selectivity; super-dynamic cathedral tone quality; marvelous distance getter. Solid one-year guarantee if you buy it for

**Only \$49<sup>88</sup>**  
**COMPLETELY ASSEMBLED**

**Values possible because you  
deal direct with big factory**

**MIRACO**  
 TRADE MARK REGISTERED

**CATHEDRAL TONED, SUPER SELECTIVE, POWERFUL DISTANCE GETTERS**

You needn't send us a cent! America's big, old, reliable Radio Factory springs its 10th Anniversary Surprise in high-grade, 1-year guaranteed sets at history's lowest prices!

With its latest perfected Screen-Grid, push-pull, super-powered and hum-free AC electric Miraco's—you are guaranteed satisfaction, values and savings unsurpassed. *Get Amazing Special Offer!*

At our risk compare a Miraco with highest priced radios, for 30 days in your home. Surprise and entertain your friends—get their opinions. Unless 100% delighted, don't buy! Your decision is final—no argument!

Only marvelously fine radios, of latest perfected type, at rock-bottom prices, can back up such a guarantee. Send postal or coupon for *Amazing Special Factory Offer!*

**Don't Confuse with Cheap Radios**

With Miraco's rich, clear cathedral tone, quiet operation, razor-sharp separation of nearby stations, tremendous "kick" on distant stations and latest improvements—you'll be the envy of many who pay 2 or 3 times as much!

Send for proof that delighted thousands of Miraco users cut through locals, get coast to coast, with tone and power of costly sets. Miraco's are custom-built of finest parts—product of 10 years' successful experience. Approved by Radio's highest authorities.

**Deal Direct with Big Factory**

Miraco outfits reach you splendidly packed, rigidly tested with everything in place ready to plug in! No assembling! Entertain yourself 30 days—then decide. Liberal one-year guarantee on each set. Play safe, save lots of money, insure satisfaction—deal direct with Radio's old, reliable builders of fine sets—10th successful year. **SEND POSTAL OR COUPON NOW for Amazing Offer!**

**USER-AGENTS WANTED**

**Exclusive Territory—  
Demonstrator Supplied**

**Spare or full time. No contract,  
no experience required. Big  
money! Send coupon now!**

*Dealers Write!*



**Free!**

**BEAUTIFULLY ILLUSTRATED LITERATURE, AMAZING SPECIAL FACTORY OFFER, TESTIMONY OF NEARBY USERS—**

All the proof you want—of our honesty, fairness, size, financial integrity, radio experience and the performance of our sets—including *Amazing Factory Offer*—sent without obligation!

**MIDWEST RADIO CORPORATION**

*Pioneer Builders of Sets—10th Successful Year*

**408-AO Miraco Bldg., Cincinnati, Ohio**

WITHOUT OBLIGATION, send latest literature, *Amazing Special Free Trial Wholesale Price Offer*, testimony of nearby users, and all Proof. ☐ User ☐ Agent ☐ Dealer

☐ Check here if interested in an **EXCLUSIVE TERRITORY PROPOSITION**

NAME

ADDRESS

**Special!  
Electric  
Super AC-7  
\$39<sup>85</sup>**

**SEND  
for  
AMAZING  
SPECIAL  
OFFER**

**THIS COUPON  
IS NOT  
AN ORDER**



**C A M O A H**  
Corona Abrasion Moisture Oil Age Heat

## On Trial



### Gang of Thieves said to Steal Power from 8 out of 10 cars on the Road . . .

**THE VERDICT**—"Car owners are sentenced to pay the cost in lost power, low gasoline mileage, and a general dissatisfaction with their cars' performance until they put on a Packard Lac-kard Ignition Cable, which can be secured from any reputable garage, service station, or repair shop."

Every time a spark in your cylinders is weakened, delayed, or missed entirely, there is a loss in engine power. That is why spark plug wires are so important. Install a Packard Lac-kard Ignition Cable Set and feel the difference in power. Be sure you get genuine Packard in the purple and yellow package.



Write for your copy of "The Camoab Gang on Trial"

For all cars \$2.00 to \$4.75



"If it isn't Packard—it isn't Lac-kard."

© 1929, The P. E. Co.

The Packard Electric



Company, Warren, Ohio.

LARGEST EXCLUSIVE MANUFACTURERS OF AUTOMOTIVE CABLE IN THE WORLD

### Everyday Wonders in Colloid Chemistry

(Continued from page 164)

example is the action of soap in removing dirt. Soap makes a colloidal solution whenever it is mixed with water; the dancing particles of soap suds can be plainly seen under an ultra-microscope. These colloidal soap particles are great stickers, especially to the human skin. So anxious are they to stick, in fact, that a tiny film of soap creeps underneath particles of dirt on the skin and literally pries them loose so that the water can wash them away—an example of a great group of forces and actions included under such technical terms as adsorption, surface tension, and interfacial tension.

**IN SHAVING**, a similar thing happens. The soap not only helps the water to penetrate the hairs and soften them, but a good shaving soap forms a thin, slippery film over the skin, so that the razor slips along smoothly and painlessly, without pulling too much on the hairs or catching the skin and making a cut. Oils or waxes used to polish furniture and floors act in much the same way. The colloidal particles fill up rough places between the fibers of the wood so that the surface looks shiny and, what is more important practically, the floor offers fewer microscopic catching-places for particles of dust.

Other examples of how waxy, gluey, and oily colloidal materials stick to things are furnished by face creams, rouges, and other cosmetics. These make adherent layers on the skin, to keep color or powder in place. The forces that hold such layers are among the strongest known to science. Ancient Egyptians, without knowing anything about the science, used the colloidal swelling of wooden wedges to split great stones like those of the obelisks. The colloidal wax which holds in place the red color on the lips of a modern girl clings with an intensity equalling at least 200,000 pounds of pressure to the square inch. That such rouge can ever be got off at all, accidentally or intentionally, is due to the fact that whatever wipes it away removes it bit by bit so that the enormous sticking pressure which the colloidal particles exert is overcome a little at a time.

**THESE** enormous forces are of importance even to life itself. Sap rises to the tops of tall trees by virtue of colloidal forces. Animal muscles contract in ways apparently not dissimilar. Digestion, nerve action, secretion, and the majority of other activities of the human body are related intimately to these colloidal phenomena. Living matter itself, the mysterious jelly-like substance called protoplasm, which is found in every living cell and which possesses, biologists believe, the essential secret of life, is a colloid. Under the ultra-microscope each living, protoplasmic cell is seen to contain the familiar dancing particles like those in colloidal gold or tobacco smoke or soap-suds.

The forces that hold a stamp fast to a letter, or the rouge fast to a flapper's lips, also hold the organs of the human body to their places and activities, even the living cells of the brain to their task of managing the body and producing thought.

Colloid chemistry is far more than a few new ways of handling chemicals. It marks the discovery by science of a whole new world of forces and substances neither so small as those of atoms nor so large as those of ordinary things.

It is the realm, Professor Wolfgang Ostwald has said, of a "neglected dimension," the realm of particles neither very large nor very small.



This One




7QSF-BKJ-NNX8





**Cylindrical Cell Construction**

Diagram illustrating the construction of a cylindrical cell "B" battery. Two solderings per cell, or 60 in all, and 29 fine wires—89 chances for trouble. Note waste spaces between cells.

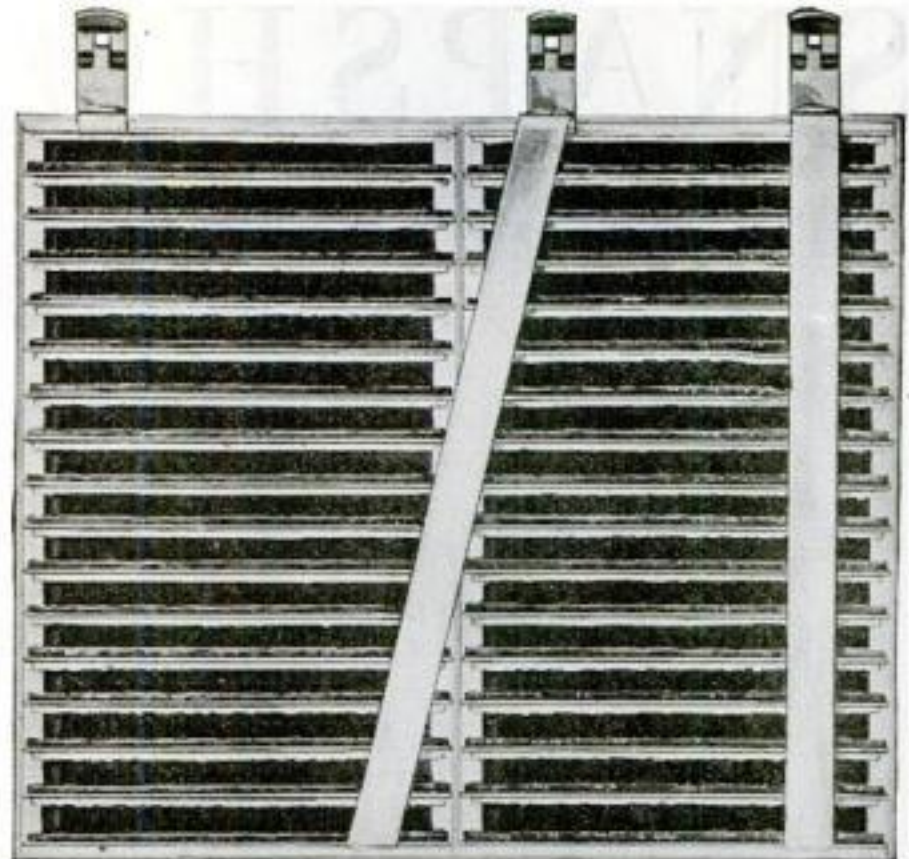

**Eveready Layerbilt Construction**

Diagram illustrating the simplicity of the Eveready Layerbilt construction. Only two broad metal bands and only five soldered connections. No waste spaces. It's all battery. Layerbilt construction is an exclusive Eveready feature. Only Eveready makes Layerbilt Batteries.

HERE IS «

# THE DIFFERENCE

» IN "B" BATTERIES

®

*Here are the facts about "B" batteries assembled of separate, individual cells:*

29 delicate, fine wires are necessary to make connections within the battery;  
60 solderings are required, making in all 89 places where trouble can come.

These things are true of any such battery, whether the cells are cylindrical, square, hexagonal or any other shape.

*Here are the facts about Eveready Layerbilts:*

Only two broad connecting bands are needed, each  $\frac{3}{8}$  inch wide;

Only five solderings are required;

All other connections are made automatically, for the flat cells are not independent but interdependent;

This is the **LARGE SIZE** Eveready Layerbilt No. 486 for heavy duty service—price, \$4.25, only 25 cents more than the Eveready cylindrical cell battery of the same size, No. 770. Eveready Layerbilt Medium Size No. 485—price, \$2.95, only 20 cents more than the Eveready cylindrical cell "B" Battery No. 772.



## PERFECT PROTECTION

Eveready Batteries are used in automatic train control, aircraft beacon receivers, talking motion pictures, short wave transmission, picture transmission, television, where life and property must be protected, and performance safeguarded by the utmost dependability of all apparatus.

The flat construction packs more active materials in the battery case and so you get longer life.

Now you can see why Eveready Layerbilts last so long, are so convenient, reliable, economical. They are the best of all Evereadys, the most popular of all. It will well repay you to insist on these superior batteries. Look for the name "Layerbilt" on the label.

**NATIONAL CARBON CO., Inc.**  
New York San Francisco

Unit of **UCC** and Carbon Corporation  
Union Carbide

**TUESDAY NIGHT IS EVEREADY HOUR NIGHT.** East of the Rockies—9 P. M. Eastern Standard Time, through WEAF and associated N. B. C. stations. On the Pacific Coast, 6 P. M. Pacific Standard Time, through N. B. C. Pacific Coast network.

**NEW EVEREADY RADIO RECEIVERS, A.C. AND BATTERY OPERATED, NOW ON SALE**



# SNAPSHOTS

## *don't grow up*

*When your Boy becomes a Man  
and your Girl becomes a Woman  
you'll wish for more reminders of  
their childhood days*



**L**ATER on, when they step out for themselves, snapshots of their early years will become your most precious possession.

Today you are looking ahead. Tomorrow you'll want to look back, to see them as they are now, as they never will be again.

This is the time when your Kodak can be of greatest help, the time to take more snapshots than you have ever taken before.

### *Children Today—Adults Tomorrow*

They change so quickly. You can almost see them getting taller, broader, more mature. Perhaps now you're tucking them into bed, buttoning up their clothes, cutting up their meat in little pieces, and keeping them away from open windows. But in only a few years more they'll be telling you what to do and looking the part.

When your Boy becomes a Man and your Girl becomes a Woman you'll wish for more reminders of their childhood days. Don't leave this wonderful period to the fickleness of memory. Keep your Kodak next to your hat and coat. Then you

won't miss any picture chances because you meant to bring it with you but forgot.

### *Don't Wait for Sunshine*

Then, too, snapshots are fun to take. That is another reason for the extraordinary popularity of Kodaks. They are on sale everywhere and at prices that do their bit toward bringing down the high cost of living. The Brownie, a genuine Eastman camera, sells for as little as \$2, and Kodaks as low as \$5.

What's more, your dealer can show you Eastman cameras that actually increase your picture-taking opportunities. These are the Modern Kodaks. Many have lenses so fast that you don't have to wait for sunshine. Everyone can take good pictures indoors, outdoors, on cloudy days and brilliant ones, with these marvelous new Kodaks. Ask to see them.

And when you've obtained your Kodak you can rely on Kodak Film to record your subjects the way you see them in the finder. Kodak Film has speed and wide latitude, both of which minimize the danger of under- and over-exposure. *It gets the picture.* Then the developing and printing of your films will be quickly and skilfully handled by any of the thousands of expert photo finishers whose stations are located throughout the country. You'll find one not far from your home.

Thus not a single real excuse has been left you! Remember that your children grow up, but snapshots remain the same as long as you live.

• • •

EASTMAN KODAK CO., Dept. 248  
Rochester, N. Y.

Please send me, FREE and without obligation, the booklet telling me about the Modern Kodaks.

Name .....

Address .....

City.....State.....29

# • KODAK •

ONLY EASTMAN MAKES THE KODAK



# WHAT MAKES IT TICK?



*The boy takes his birthday watch apart to see what makes it tick. The boy grown older listens to the tick of uranium electrons discharged into space—he actually hears the atoms of the metal disintegrate.*



THE spirit is the same—the spirit of pure science. For thirty years General Electric has encouraged this spirit—this keen play of scientists just beyond the border of the known.

Both for you and for General Electric this policy has proved to be a profitable investment. For example, the present G-E MAZDA lamp. Years of purely scientific investigation preceded this invention, which saves the American people about a billion dollars a year in lighting bills.

General Electric research has made many such practical contributions to the comfort, health, and prosperity of us all, yet most of them owe their origin to the purely scientific curiosity which is the real dynamo of General Electric accomplishment. As a result, the G-E monogram is your assurance of electrical correctness and dependability, whether it appears on the motor that runs your sewing machine or on those that drive great liners out to sea.

JOIN US IN THE GENERAL ELECTRIC  
HOUR, BROADCAST EVERY SATURDAY  
AT 8 P.M., E.S.T. ON A NATION-WIDE  
N.B.C. NETWORK



# GENERAL ELECTRIC





**C. B. SMITH**  
President  
STEWART-WARNER  
CORP. Says:

"Every Stewart-Warner receiving set undergoes the most exacting tests before it is approved by our laboratory engineers. For this purpose RCA Radiotrons are used. Because we have discovered that they add materially to the performance of our instruments we recommend them to all of our customers for initial equipment and replacement."

*C. B. Smith*

That all vacuum tubes should be replaced after a year of use is the advice of expert radio engineers. When this is done a brand new RCA Radiotron should be put in every socket. New tubes will not do their best in company with old ones.



# RCA RADIIOTRON

MADE BY THE MAKERS OF THE RADIOLA